

FEATURES

- Miniature 5.0 x 3.2mm package
- Frequency Range 1.0MHz to 125.0MHz
- Supply current from 2mA
- Supply voltage range: 1.0, 1.2, 1.8, 2.5, 3.3 or 5.0 Volts
- Tristate function for power conservation

DESCRIPTION

H53 oscillators are a general-purpose clock oscillators packaged in a 3.2 x 2.5 x 1.2mm, miniature package. The part is ideal for space-constrained applications. The oscillator is available with 1.0, 1.2, 1.8, 2.5, 3.3 or 5.0 Volts supply voltage.



APPLICATIONS

- CPU, Graphics, Multimedia, A/V clocks
- MPEG / DVD / HDTV clocks
- Laser engine pixel set / set-top clocks
- OC-3, OC-2, OC-48 and OC-192 clocks
- SONET / SDH / ATM clocks
- Fast Ethernet and Gigabit Ethernet clocks
- NTSC / PAL encoder/decoder clocks
- PLL / synthesizer clocks
- Fibre channel and ADSL clocks

SUPPLY VOLTAGE/CURRENT CONSUMPTION/RISE AND FALL TIME

Supply Voltage	+1.0VDC±5% Code = '1'	+1.2VDC±5% Code = '12'	+1.8VDC±5% Code = '18'	+2.5VDC±5% Code = '25'	+3.3VDC±5% Code = '3'	+5.0VDC±10% Code = '5'
Available Frequency Range	1.0~40MHz	1.0~50MHz	1.0~125MHz	1.0~125MHz	1.0~125MHz	1.0~125.0MHz
Logic HIGH '1' (90%V _{dd} min.)	0.9V min.	0.9V min.	1.62V min.	2.25V min.	2.97V min.	4.5V min.
Logic LOW '0' (90% V _{dd} max.)	0.1V max.	0.1V max.	0.18V max.	0.25V max.	0.33V max.	0.5V max.
Current Consumption	[1.0~32MHz] 2.0mA max.	[1.0~32MHz] 2.5mA max.	[1.0~1.5MHz] 5mA max.	[1.0~1.5MHz] 5mA max.	[1.0~1.5MHz] 5mA max.	[1.0~1.5MHz] 5mA max.
			[1.5~20MHz] 8mA max.	[1.5~20MHz] 8mA max.	[1.5~20MHz] 8mA max.	[1.5~20MHz] 10mA max.
	[32.1~40MHz] 3.0mA max.	[32.1~50MHz] 3.5mA max.	[20~50MHz] 15mA max.	[20~50MHz] 15mA max.	[20~50MHz] 15mA max.	[20~50MHz] 15mA max.
			[50.1~125MHz] 22mA max.	[50.1~125MHz] 25mA max.	[50.1~125MHz] 35mA max.	[50.1~125MHz] 40mA max.
Rise Time/Fall Time	6ns max.	6ns max.	7ns max.	7ns max.	10ns max.	10ns max.


Measured between 10% ~ 90% of wave form (CL = 15pF)

GENERAL SPECIFICATION


Frequency Range:	1.0MHz to 125.0MHz
Operating Temperature Range	
Commercial:	-10° to +70°C
Industrial:	-40° to +85°C
Frequency Stability*:	From ±25ppm over -40° to +85°C. See Part Number Format table.
Output Load:	15pF max., 30pF and 50pF available for parts with 3.3V or 5.0V supply
Duty Cycle:	50% ±10% standard, option of 50% ±5% (add 'S' to end of part number for ±5%)
Start-up Time	
1.0~32.0MHz:	5ms max.
32.0~125.0MHz:	10ms max.
Storage Temperature Range:	-50° to +100°C
Ageing:	±5ppm per year max.
Enable/Disable (Tristate):	Output is high impedance when "0" is applied to pad/pin 1. Enable time is 10ms max.
RoHS Status:	RoHS Compliant

* Temperature Stability from ±10ppm is available. If non-standard temperature stability required add, eg., 'C10' for ±10ppm over commercial temperature range

OUTLINES & DIMENSIONS

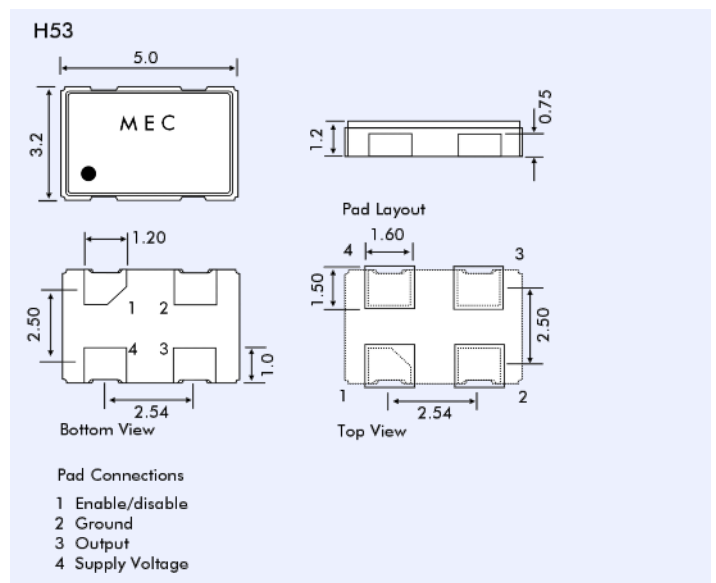

SOLDER PROFILE

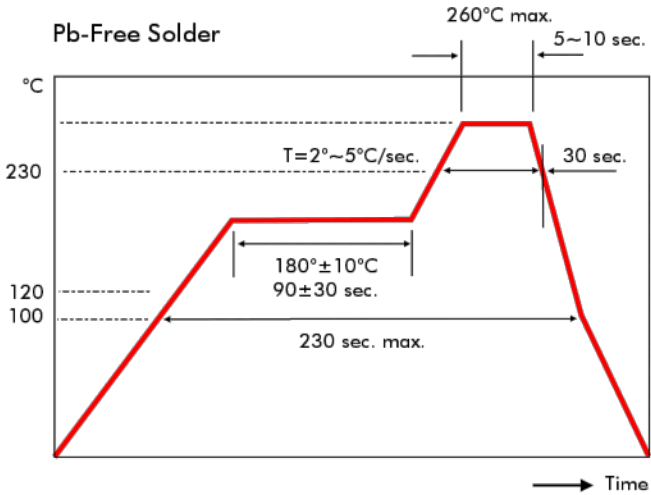

PART NUMBER FORMAT

Example: 3H53DT-32.000-S

3 H53 D T - 32.000 - S

Supply Voltage:

5 = 5.0 Volts

3 = 3.3 Volts

25 = 2.5 Volts

18 = 1.8 Volts

12 = 1.2 Volts

1 = 1.0 Volts

Series Designation:

H53

Stability and Temperature Range:

A = $\pm 25\text{ppm}$ over -10° to $+70^{\circ}\text{C}$

B = $\pm 50\text{ppm}$ over -10° to $+70^{\circ}\text{C}$

C = $\pm 100\text{ppm}$ over -10° to $+70^{\circ}\text{C}$

D = $\pm 25\text{ppm}$ over -40° to $+85^{\circ}\text{C}$

E = $\pm 50\text{ppm}$ over -40° to $+85^{\circ}\text{C}$

F = $\pm 100\text{ppm}$ over -40° to $+85^{\circ}\text{C}$

Tristate (Enable/Disable) Function

Nominal Frequency:

In MHz

Duty Cycle/Symmetry:

S = $50\%\pm 5\%$

(Optional)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Clock Oscillators](#) category:

Click to view products by [Mercury United](#) manufacturer:

Other Similar products are found below :

[601252](#) [F335-25](#) [F535L-33.333](#) [F535L-50](#) [ASV-20.000MHZ-LR-T](#) [MXO45HS-2C-66.6666MHZ](#) [NBXDBB017LN1TAG](#) [SiT1602BI-22-33E-50.000000E](#) [SiT8209AI-32-33E-125.000000](#) [SIT8918AA-11-33S-50.000000G](#) [SM4420TEV-40.0M-T1K](#) [SMA4306-TL-H](#) [F335-24](#) [F335-40](#) [F535L-10](#) [F535L-12](#) [F535L-16](#) [F535L-24](#) [F535L-27](#) [PE7744DW-100.0M](#) [CSX-750FCC14745600T](#) [ASF1-3.686MHZ-N-K-S](#) [ASV-4.000MHZ-LCS-T](#) [XLH735025.000JU4I8](#) [XLP725125.000JU6I8](#) [XO57CTECNA3M6864](#) [601251](#) [EP16E7E2H26.000MTR](#) [SiT8503AI-18-33E-0.200000X](#) [SIT8918AA-11-33S-16.000000G](#) [SIT9122AI2C233E300.000000X](#) [XO37CTECNA20M](#) [XO3003](#) [9120AC-2D2-33E212.500000](#) [9102AI-243N25E100.00000](#) [8208AC-82-18E-25.00000](#) [8008AI-72-XXE-24.545454E](#) [8004AC-13-33E-133.33000X](#) [AS-4.9152-16-SMD-TR](#) [ASFL1-48.000MHZ-LC-T](#) [632L3I004M00000](#) [SIT8920AM-31-33E-25.0000](#) [DSC1028DI2-019.2000](#) [9121AC-2C3-25E100.00000](#) [9102AI-233N33E100.00000X](#) [9102AI-233N25E200.00000](#) [9102AI-232H25S125.00000](#) [9102AI-133N25E200.00000](#) [9102AC-283N25E200.00000](#) [9001AC-33-33E1-30.000](#)