

MTQH2016 Series

Mini Molded Chip Power Inductors

FEATURES

- Metal material for large current and low loss
- Vinyl thermal spray, better surface compactness
- Closed magnetic circuit design reduces leakage flux
- Operate temperature range $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$ (Including self temp. rise)
- RoHS compliant



APPLICATIONS


- Smart phone, pad
- Notebooks, VR, AR
- Portable gaming devices, Smart wear, Wi-Fi module

Explanation of Part Number


MTQH 201610 S 2R2 M B T A
 1 2 3 4 5 6 7 8

- ◆ 1:Series Name:Mini Molding Chip type power inductor
- ◆ 2:Size Code: L*W*T
- ◆ 3: Material Code:S ,B Type
- ◆ 4:Initial inductance value: 2R2 = 2.2uH
- ◆ 5:Tolerance of Inductance:M: $\pm 20\%$
- ◆ 6:Coating color:B=Black
- ◆ 7:Packing:Tape Carrier Package
- ◆ 8:Internal Code: A,B

Dimensions: [mm]

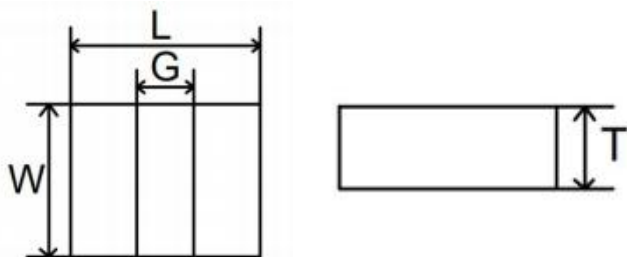

Land Pattern: [mm]

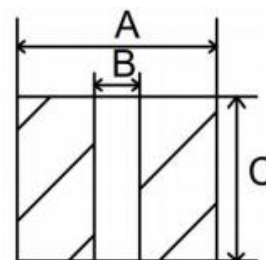

| Series | L | G | W | T | A | B | C |
|-------------|---------------|---------------|---------------|----------|------|------|------|
| MTQH201608S | 2.0 ± 0.2 | 0.6 ± 0.2 | 1.6 ± 0.2 | 0.80Max. | 2.10 | 0.50 | 1.70 |
| MTQH201610S | 2.0 ± 0.2 | 0.6 ± 0.2 | 1.6 ± 0.2 | 1.00Max. | 2.10 | 0.50 | 1.70 |
| MTQH201610B | 2.0 ± 0.1 | 0.6 ± 0.2 | 1.6 ± 0.1 | 1.00Max. | 2.00 | 0.50 | 1.60 |
| MTQH201612S | 2.0 ± 0.2 | 0.6 ± 0.2 | 1.6 ± 0.2 | 1.20Max. | 2.10 | 0.50 | 1.70 |

Electrical Properties:

MTQH201608(2.0*1.6*0.8mm)

| P/N | L0(μ H) @ (0A) 1MHz | Rdc(m Ω) | | Heat rating current Irms(A) | | Saturation current Isat(A) | |
|--------------------|-----------------------------|------------------|-----|--------------------------------|-----|-------------------------------|-----|
| | | Typical | Max | Typical | Max | Typical | Max |
| MTQH201608SR22MBT | 0.22 | 14 | 19 | 6.6 | 5.9 | 6.1 | 5.6 |
| MTQH201608SR24MBT | 0.24 | 14 | 20 | 6.5 | 5.8 | 6.0 | 5.5 |
| MTQH201608SR33MBT | 0.33 | 18 | 24 | 5.5 | 4.8 | 5.8 | 5.3 |
| MTQH201608SR47MBT | 0.47 | 24 | 27 | 4.6 | 4.4 | 5.5 | 5.0 |
| MTQH201608SR68MBT | 0.68 | 39 | 44 | 3.8 | 3.5 | 4.6 | 4.2 |
| MTQH201608S1R0MBT | 1.0 | 53 | 60 | 3.6 | 3.3 | 3.3 | 3.1 |
| MTQH201608S1R0MBTA | 1.0 | 45 | 52 | 3.6 | 3.3 | 3.8 | 3.5 |
| MTQH201608S1R5MBT | 1.5 | 73 | 85 | 3.1 | 2.8 | 3.0 | 2.8 |
| MTQH201608S2R2MBT | 2.2 | 123 | 140 | 2.2 | 2.0 | 2.5 | 2.3 |
| MTQH201608S3R3MBT | 3.3 | 200 | 220 | 1.8 | 1.5 | 2.1 | 1.8 |
| MTQH201608S4R7MBT | 4.7 | 260 | 290 | 1.6 | 1.4 | 1.7 | 1.5 |
| MTQH201608S100MBT | 10.0 | 690 | 800 | 1.0 | 0.9 | 1.0 | 0.9 |

MTQH201608(2.0*1.6*1.0mm)

| P/N | L0(μ H) @ (0A) 1MHz | Rdc(m Ω) | | Heat rating current Irms(A) | | Saturation current Isat(A) | |
|--------------------|-----------------------------|------------------|-----|--------------------------------|-----|-------------------------------|-----|
| | | Typical | Max | Typical | Max | Typical | Max |
| MTQH201610SR10MBT | 0.1 | 7.0 | 12 | 8.5 | 8.0 | 9.0 | 8.4 |
| MTQH201610SR15MBT | 0.15 | 8.0 | 14 | 7.6 | 7.0 | 8.7 | 8.0 |
| MTQH201610SR22MBT | 0.22 | 11 | 18 | 6.9 | 6.3 | 8.2 | 7.5 |
| MTQH201610SR24MBT | 0.24 | 12 | 19 | 6.8 | 6.2 | 8.0 | 7.4 |
| MTQH201610SR33MBT | 0.33 | 17 | 22 | 5.7 | 5.3 | 7.0 | 6.5 |
| MTQH201610SR47MBT | 0.47 | 22 | 25 | 5.5 | 5.0 | 6.3 | 5.5 |
| MTQH201610SR68MBT | 0.68 | 25 | 32 | 4.6 | 4.3 | 5.2 | 4.7 |
| MTQH201610S1R0MBT | 1.0 | 35 | 43 | 4.5 | 4.1 | 4.6 | 4.2 |
| MTQH201610S1R0MBTA | 1.0 | 31 | 36 | 4.6 | 4.2 | 4.7 | 4.2 |
| MTQH201610S1R5MBT | 1.5 | 80 | 100 | 2.6 | 2.3 | 3.2 | 2.9 |
| MTQH201610S2R2MBT | 2.2 | 120 | 130 | 2.5 | 2.1 | 3.0 | 2.8 |
| MTQH201610B2R2MBT | 2.2 | 115 | 125 | 2.5 | 2.2 | 3.3 | 3.0 |
| MTQH201610S3R3MBT | 3.3 | 140 | 170 | 1.7 | 1.5 | 2.3 | 2.0 |
| MTQH201610S4R7MBT | 4.7 | 190 | 220 | 1.6 | 1.4 | 2.0 | 1.8 |
| MTQH201610S100MBT | 10.0 | 483 | 580 | 1.0 | 0.7 | 1.4 | 1.1 |

MTQH201612(2.0*1.6*1.2mm)

| P/N | L0(μ H) @ (0A) 1MHz | Rdc(m Ω) | | Heat rating current Irms(A) | | Saturation current Isat(A) | |
|-------------------|-----------------------------|------------------|-----|--------------------------------|-----|-------------------------------|------|
| | | Typical | Max | Typical | Max | Typical | Max |
| MTQH201612SR10MBT | 0.1 | 4.0 | 6.0 | 12 | 10 | 13 | 11.5 |
| MTQH201612SR15MBT | 0.15 | 7.5 | 10 | 10 | 9.0 | 12 | 10.5 |
| MTQH201612SR24MBT | 0.24 | 9.0 | 11 | 9.1 | 8.6 | 9.2 | 8.7 |
| MTQH201612SR33MBT | 0.33 | 10 | 15 | 7.7 | 7.2 | 7.8 | 7.3 |
| MTQH201612SR47MBT | 0.47 | 13 | 17 | 6.7 | 6.0 | 6.7 | 6.0 |
| MTQH201612SR68MBT | 0.68 | 19 | 23 | 6.0 | 5.3 | 6.0 | 5.3 |
| MTQH201612S1R0MBT | 1.0 | 30 | 36 | 5.0 | 4.5 | 5.0 | 4.5 |
| MTQH201612S1R5MBT | 1.5 | 40 | 50 | 4.0 | 3.5 | 4.0 | 3.5 |
| MTQH201612S2R2MBT | 2.2 | 77 | 90 | 3.3 | 2.9 | 3.1 | 2.7 |
| MTQH201612S3R3MBT | 3.3 | 135 | 165 | 2.4 | 2.0 | 2.7 | 2.3 |

Test remarks

Note 1.: All test data is referenced to 25 °C ambient.

Note 2.: Test Condition: 1MHz, 1.0Vrms.

Note 3.: Irms:DC current (A) that will cause an approximate Δ T of 40 °C.


Note 4.: Isat:DC current (A) that will cause L0 to drop approximately 30%.

Note 5.: Operating Temperature Range -55°C to + 125°C.

Note 6.: The part temperature (ambient + temp rise) should not exceed 125 under °C the worst case operating conditions. Circuit design, component placement, PCB trace size and thickness, airflow and other cooling provision all affect the part temperature. Part temperature should be verified in the end application.


Note 7.: The rated current as listed is either the saturation current or the heating current depending on which value is lower.

Structure

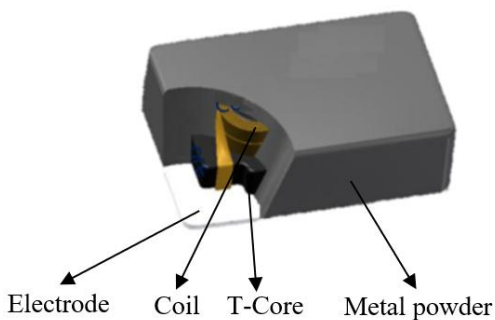


Current Characteristic


MTQH201608SR22MBT

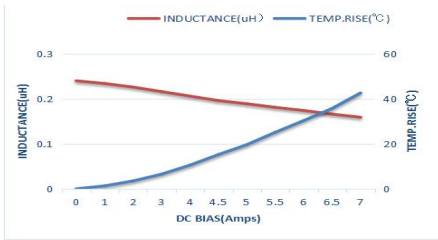


MTQH201608SR24MBT

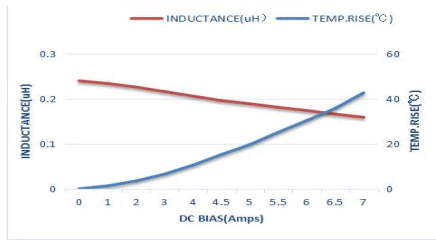


MTQH201608SR33MBT

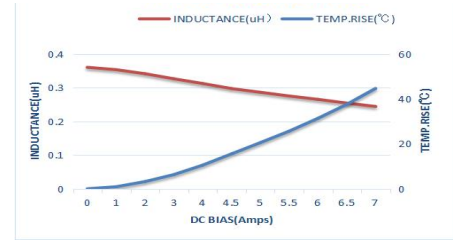


MTQH201608SR47MBT

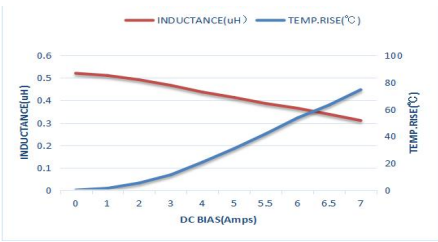


MTQH201608SR68MBT

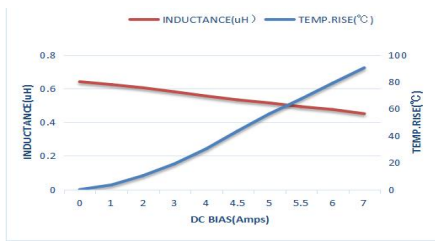


MTQH201608S1R0MBT

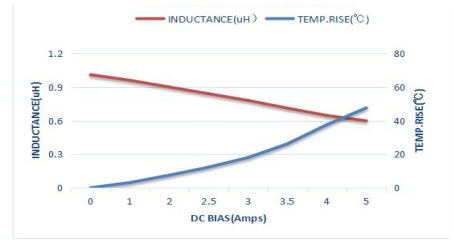


MTQH201608S1R5MBT

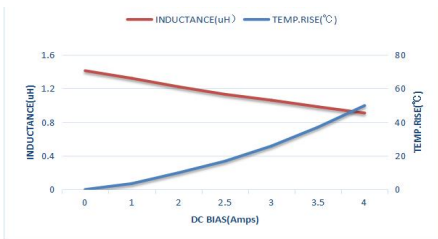


MTQH201608S2R2MBT

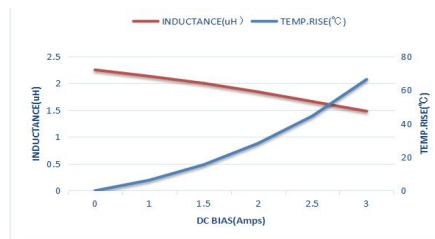


MTQH201608S3R3MBT

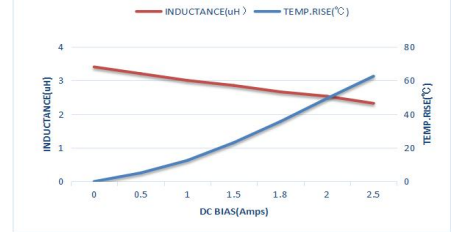


MTQH201608S4R7MBT

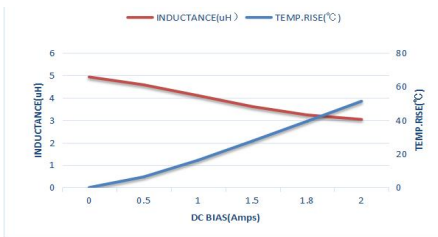


MTQH201608S100MBT

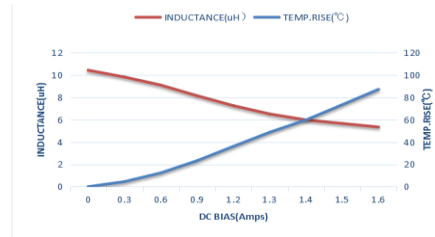


MTQH201610SR10MBT

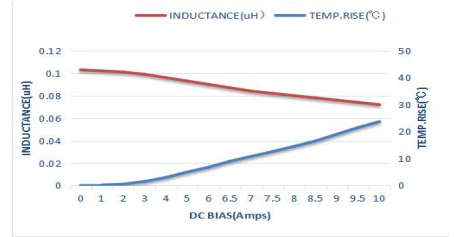


MTQH201610SR15MBT












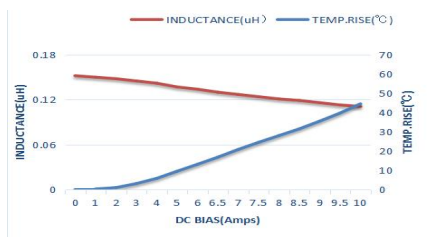








MTQH201610SR22MBT

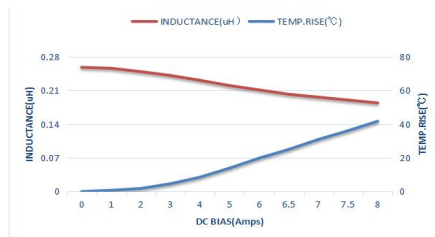

MTQH201610SR24MBT

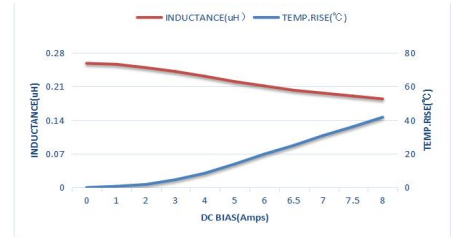

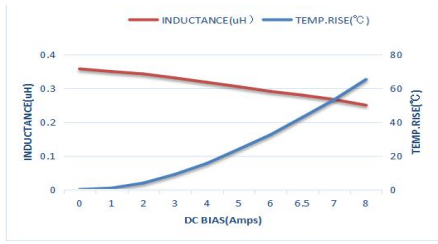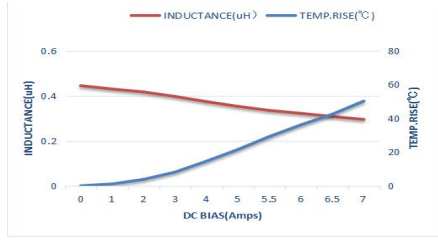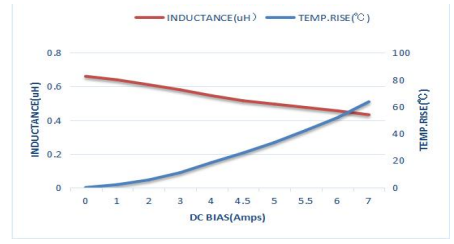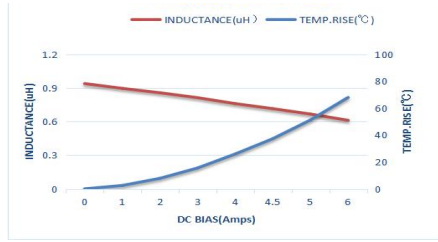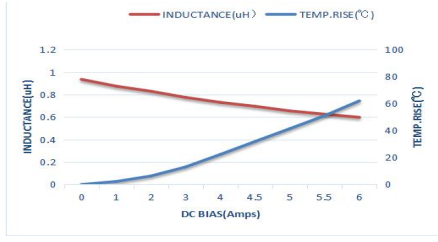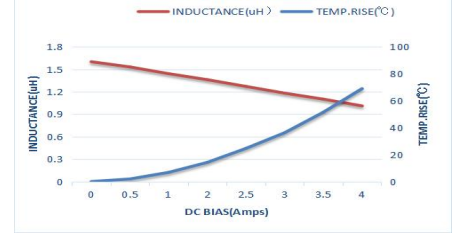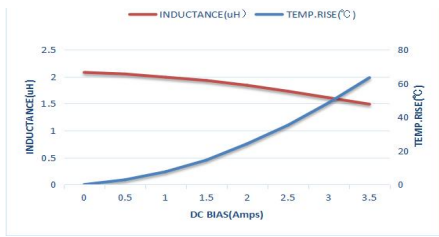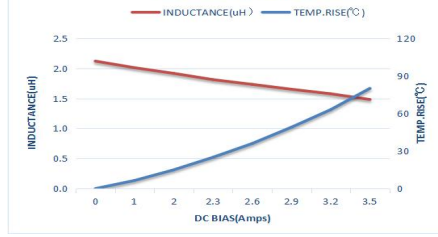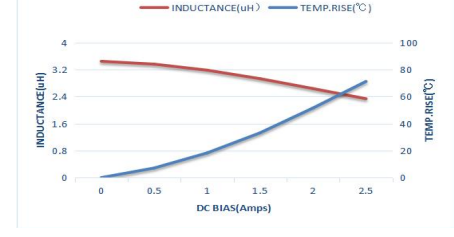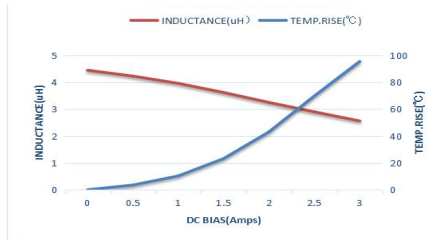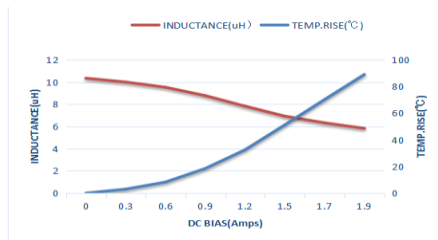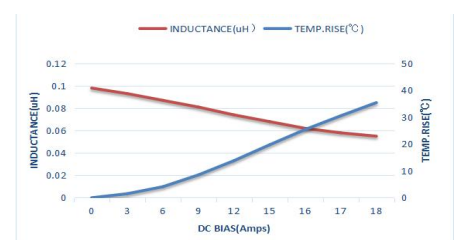MTQH201610SR33MBT

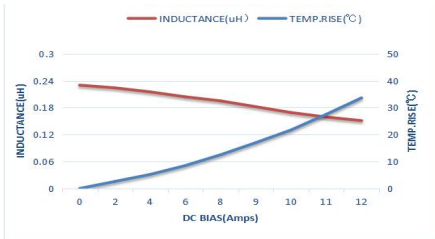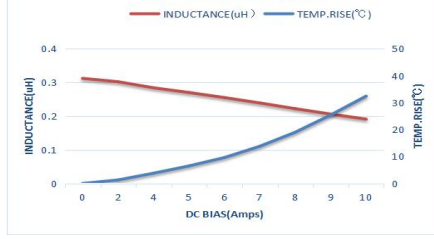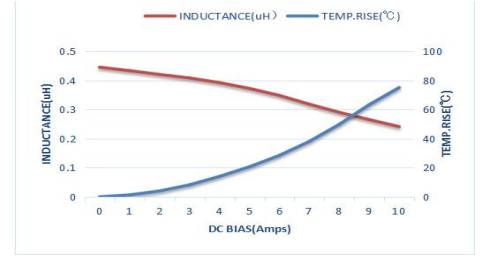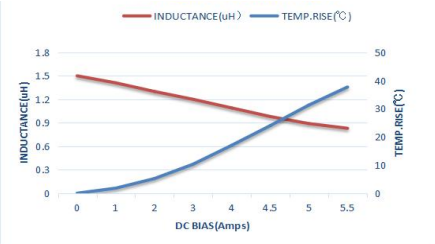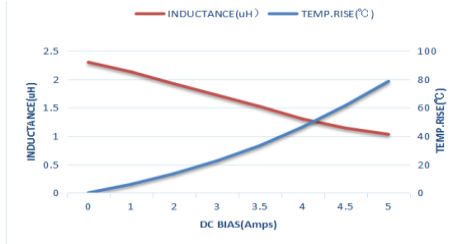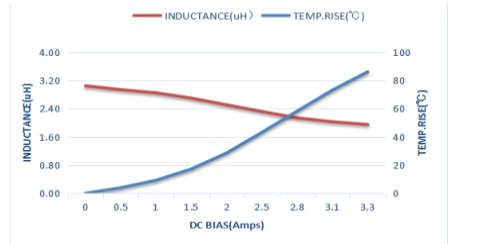MTQH201610SR47MBT

MTQH201610SR68MBT

MTQH201610S1R0MBT

MTQH201610S1R0MBTD

MTQH201610S1R5MBT

MTQH201610S2R2MBT

MTQH201610S2R2MBT

MTQH201610S3R3MBT

MTQH201610S4R7MBT

MTQH201610S100MBT

MTQH201612SR10MBT


MTQH201612SR24MBT

MTQH201612SR33MBT

MTQH201612SR47MBT

MTQH201612S1R5MBT

MTQH201612S2R2MBT

MTQH201612S3R3MBT


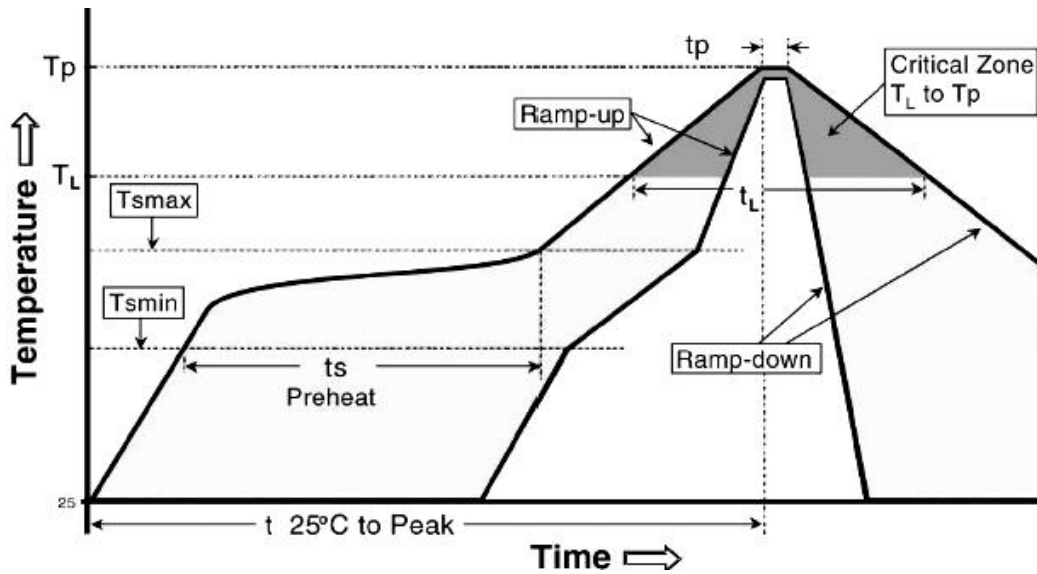
Reliability

| Item | Requirements | Test Methods and Remarks |
|------------------------------|--|---|
| Insulation Resistance | $\geq 100M\Omega$ | 100 VDC between inductor coil and The middle of the top surface of the body for 60 seconds. |
| Solderability | 90% or more of electrode area shall be coated by new solde. | Dip pads in flux . Solder Composition: Sn/Ag3.0/Cu0.5(Pb-Free). Solder Temperature: $245 \pm 5^\circ\text{C}$. Immersion Time: (5 ± 1) s. |
| Resistance to Soldering Heat | No visible mechanical damage. Inductance change: Within $\pm 10\%$. | Dip pads in flux. Solder Composition: Sn/Ag3.0/Cu0.5(Pb-Free). Solder Temperature: $260 \pm 5^\circ\text{C}$. Immersion Time: 10 ± 1 sec. |
| Adhesion of teral electrode | Strong bond between the pad and the core, without come off PCB. | Inductors shall be subjected to $(260 \pm 5)^\circ\text{C}$ for (20 ± 5) s Soldering in the base whit 0.3mm solder. And then aplombelectrode way plus tax 10 N for (10 ± 1) seconds. |
| High temperature | No case deformation or change in appearance. Inductance change: Within $\pm 10\%$ | Temperature: $125 \pm 2^\circ\text{C}$. Time : 1000 hours. Measurement at 24 ± 4 hours after test conclusion. |
| Low temperature | No visible mechanical damage. Inductance change: Within $\pm 10\%$ | Temperature: $-40 \pm 2^\circ\text{C}$. Time : 1000 hours. Measurement at 24 ± 4 hours after test conclusion. |
| Thermal shock | No visible mechanical damage. Inductance change: Within $\pm 10\%$ | The test sample shall be placed at $(-55 \pm 3)^\circ\text{C}$ and $(125 \pm 3)^\circ\text{C}$ for (30 ± 3) , different temperature conversion time is 2~3 utes. The temperature cycle shall be repeated 32 cycles. Placed at room temperature for 2 hours, within 48 ± 4 hours of testing. |
| Temperature characteristic | Inductance change Pc-b,Pc-d: Within $\pm 20\%$ | a: $+20^\circ\text{C}$ (30~45) → b: -40°C (30~45) → c: $+20^\circ\text{C}$ (30~45) → d: $+125^\circ\text{C}$ (30~45) → e: $+20^\circ\text{C}$ (30~45) $P_{c-b} = \frac{L_b - L_c}{L_c} \times 100\%$; $P_{c-d} = \frac{L_d - L_c}{L_c} \times 100\%$ |
| Static Humidity | No visible mechanical damage. Inductance change: Within $\pm 10\%$ | Inductors shall be subjected to $(95 \pm 3)\%RH$. at $(60 \pm 2)^\circ\text{C}$ for (1000 ± 4) h. Placed at room temperature for 2 hours, within 48 hours of testing. |
| | No visible mechanical damage. Inductance change: Within $\pm 10\%$ | Inductors shall be store at $(85 \pm 2)^\circ\text{C}$ for (1000 ± 4) hours with Irms applied. Placed at room temperature for 2 hours, within 48 hours of testing |

Soldering Condition

(This is for recommendation, please customer perform adjustment according to actual application)

Recommend Reflow Soldering Profile : (solder : Sn96.5 / Ag3 / Cu0.5)




| Profile Feature | Lead (Pb)-Free solder |
|--|-----------------------|
| Preheat: | |
| Temperature Min (T_{smin}) | 150°C |
| Temperature Max (T_{smax}) | 200°C |
| Time (T_{smin} to T_{smax}) (t_s) | 60 -120 seconds |
| Average ramp-up rate: | |
| (T_{smax} to T_p) | 3°C / second max. |
| Time maintained above : | |
| Temperature (T_L) | 217°C |
| Time (t_L) | 60-150 seconds |
| Peak Temperature (T_p) | 260°C |
| Time within $+0^\circ C$ to $-5^\circ C$ of actual peak Temperature (t_p) ² | 10 seconds |
| Ramp-down Rate | 6°C/second max. |
| Time 25°C to Peak Temperature | 8minutes max. |

Allowed Re-flow times : 2 times

Remark : To avoid discoloration phenomena of chip on terminal electrodes, please use N₂ Re-flow furnace .

Packing


Dimension of plastic taping: (Unit: mm)

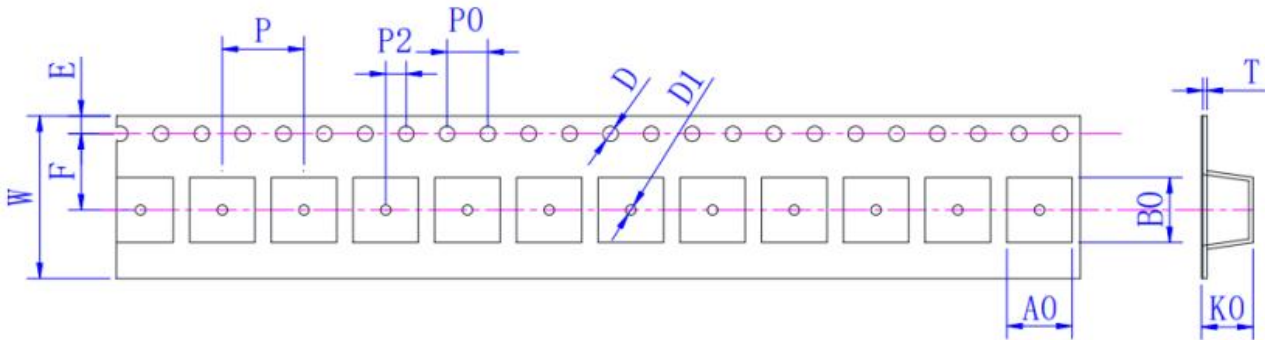

| Series | W ±0.30 | A0 ±0.05 | B0 +0.1/-0 | D +0.1/-0 | D1 Min | E ±0.10 | F ±0.10 | K0 ±0.05 | P0 ±0.10 | P2 ±0.10 | P ±0.10 | T ±0.05 |
|--------|------------|-------------|---------------|--------------|-----------|------------|------------|-------------|-------------|-------------|------------|------------|
| 201608 | 8.00 | 1.90 | 2.30 | 1.50 | 1.0 | 1.75 | 3.50 | 1.00 | 4.00 | 2.00 | 4.00 | 0.23 |
| 201610 | 8.00 | 1.90 | 2.30 | 1.50 | 1.0 | 1.75 | 3.50 | 1.20 | 4.00 | 2.00 | 4.00 | 0.23 |
| 201612 | 8.00 | 1.90 | 2.30 | 1.50 | 1.0 | 1.75 | 3.50 | 1.40 | 4.00 | 2.00 | 4.00 | 0.23 |

Dimension of Reel : (Unit: mm)

| Type | A ±0.5 | B ±0.5 | C ±0.5 | D ±1 |
|------|-----------|-----------|-----------|---------|
| All | 178 | 60 | 12 | 1.5 |

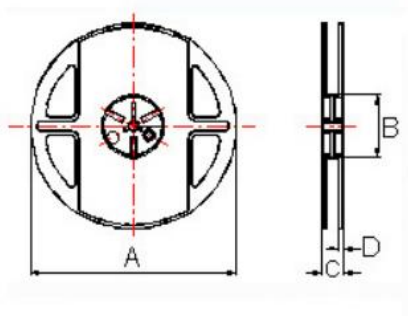

Packing Quantity: 3000pcs/Reel

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [MetalLions](#) manufacturer:

Other Similar products are found below :

[CR32NP-100KC](#) [70F224AI](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#)
[PE-53601NL](#) [PE-53602NL](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-R47-R](#) [HC8-1R2-R](#)
[HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-4R7M](#) [RCP1317NP-391L](#) [DH2280-4R7M](#) [DS1608C-106](#) [B10TJ](#) [B82498B3101J000](#) [ELJ-](#)
[RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#)
[1812LS-224XJ](#) [1812LS-563XJ](#) [1812LS-683XJ](#) [1812LS-824XJ](#) [NIN-FB101JTR110F](#) [NIN-FB471JTR62F](#) [NIN-FC1R5JTR220F](#) [NIN-](#)
[HCR15JTRF](#) [NIN-HCR33JTRF](#) [NIN-HDR22JTRF](#) [NIN-HDR82JTRF](#) [NIN-HK2N7STRF](#) [NIN-PA150KTR370F](#) [NIN-PB100KTR550F](#)