


Features

- Protects one I/O or Power Line
- Completely Compatible with SOD923
- Low Clamping Voltage
- Working Voltage: 8V
- Low Leakage Current
- Response Time is Typically < 1 ns

**DFN-2L**

IEC COMPATIBILITY (EN61000-4)

- IEC 61000-4-2 (ESD) $\pm 15\text{kV}$ (air), $\pm 8\text{kV}$ (contact)
- IEC 61000-4-4 (EFT) 40A (5/50ns)

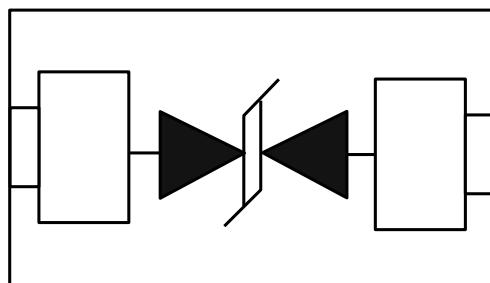
Mechanical Characteristics

- JEDEC DFN-2L package (0402 size)
- Molding compound flammability rating:
UL 94 V-0
- Marking : Marking Code
- RoHS Compliant

Applications

- Cellular Handsets & Accessories
- Personal Digital Assistants (PDAs)
- Notebooks & Handhelds
- Portable Instrumentation
- Digital Cameras
- MP3 Players

Schematic & PIN Configuration




Bi-directional

Absolute Maximum Rating

Rating	Symbol	Value	Units
Peak Pulse Power ($t_p = 8/20\mu s$)	P_{PP}	350	Watts
Peak Forward Voltage ($I_F = 1A$, $t_p = 8/20\mu s$)	V_{FP}	1.5	V
Operating Temperature	T_J	-55 to + 125	°C
Storage Temperature	T_{STG}	-55 to +150	°C

Electrical Parameters (T=25°C)





Symbol	Parameter
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
V_{RWM}	Working Peak Reverse Voltage
I_R	Maximum Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_F	Forward Current
V_F	Forward Voltage @ I_F

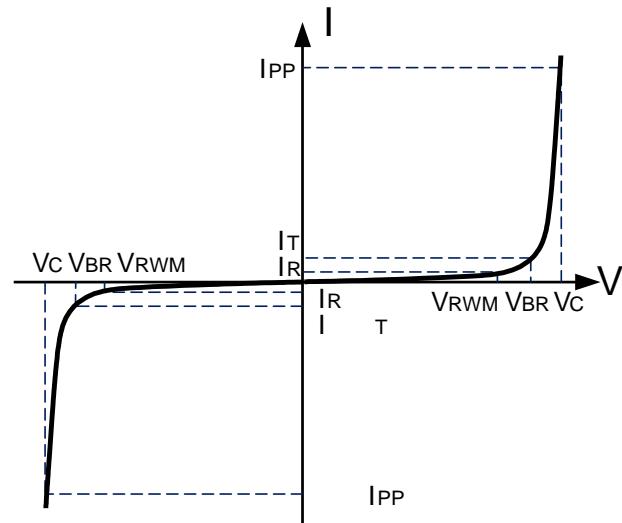

Electrical Characteristics

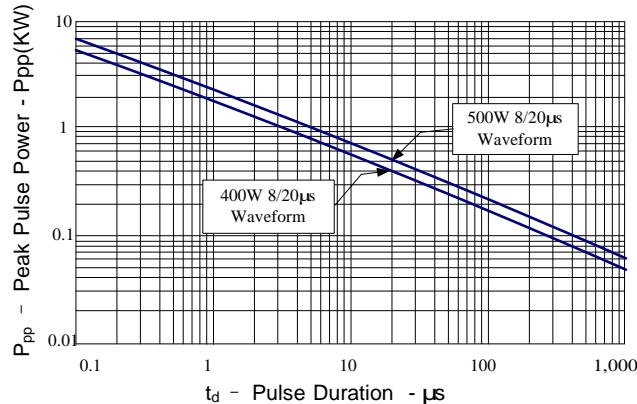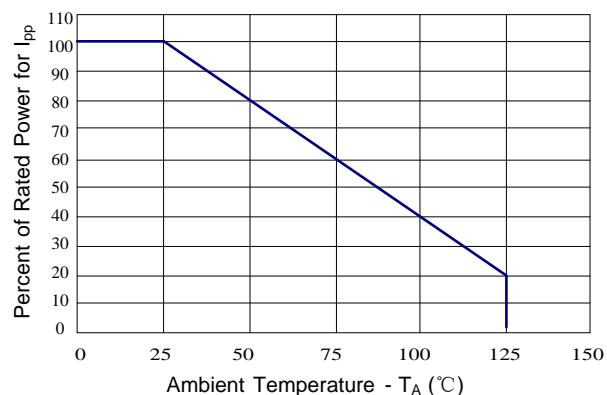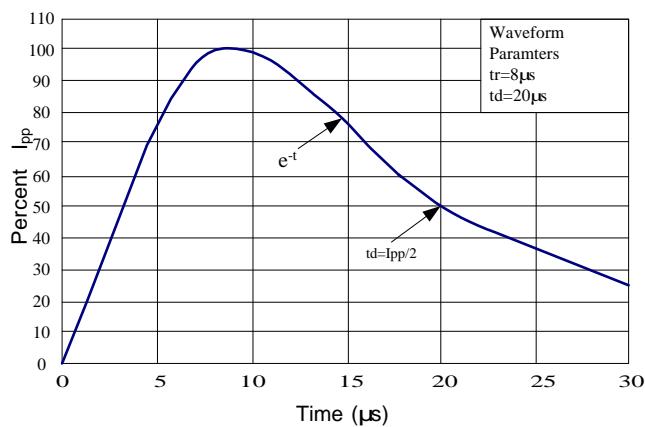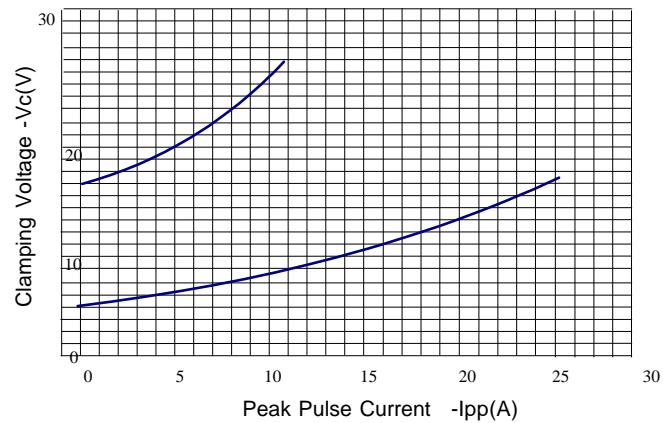MDFN2C071V35						
Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse Stand-Off Voltage	V_{RWM}				7.0	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1mA$	8.4			V
Reverse Leakage Current	I_R	$V_{RWM}=5V$, $T=25^\circ C$			1	μA
Peak Pulse Current	I_{PP}	$t_p=8/20\mu s$			15	A
Clamping Voltage	V_C	$I_{PP}=4A$, $t_p=8/20\mu s$		12		V
Junction Capacitance	C_J	$V_R=0V$, $f=1MHz$		45		pF

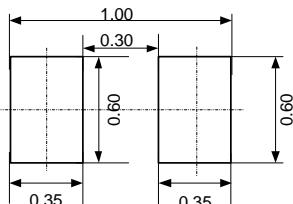
Typical Characteristics

Figure 1: Peak Pulse Power Vs Pulse Time

Figure 2: Power Derating Curve

Figure 3 Pulse Waveform

Figure 4 Clamping Voltage vs. Peak Pulse Current


Outline Drawing – DFN-2L

PACKAGE OUTLINE		DFN-2L		
SYMB	MILIMETER			
	OL	MIN	NOM	
A	0.45	0.50	0.55	
A1	0	0.02	0.05	
b	0.45	0.50	0.55	
C	0.12	0.15	0.18	
D	0.95	1.00	1.05	
e	0.65BSC			
E	0.55	0.60	0.65	
L	0.20	0.25	0.30	
L1	0.05REF			
h	0.07	0.12	0.17	

BOTTOM VIEW

Land Pattern

Package Information

Qty: 10k/Reel

Marking Codes

Part Number	Marking Code
MDFN2C071V35	8B

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for ESD Suppressors / TVS Diodes category:

Click to view products by Me-TECH manufacturer:

Other Similar products are found below :

[NTE4902](#) [P4SMAJ15A](#) [P4SMAJ26A](#) [SMAJ400CA-TP](#) [TGL34-47CA](#) [ESDAULC45-1BF4](#) [SM1605E3/TR13](#) [SMF20A-TP](#) [P4SMAJ12A](#)
[CPDUR24V-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [MPLAD30KP45CAE3](#) [MMBZ27VCLQ-7-F](#) [MMAD1108/TR13](#) [MPLAD30KP24A](#)
[ACPDQC5V0R-HF](#) [DFLT170A-7](#) [NTE4900](#) [NTE4926](#) [NTE4938](#) [SMF22A-TP](#) [SMF12A-TP](#) [SLVU2.8-TP](#) [SMLJ6.5CA-TP](#) [SMAJ6.5CA-TP](#)
[MMAD1108E3/TR13](#) [D5V0M1U2LP3-7](#) [SMAJ400A-TP](#) [AOZ8811DT-03](#) [AOZ8831DI-05](#) [AOZ8831DT-03](#) [SMAJ188CA](#) [3SMC33CA](#)
[BK](#) [CPDQC3V3C-HF](#) [CPDQC12VE-HF](#) [MPLAD30KP170CA](#) [82357120100](#) [5.0SMLJ15CA-TP](#) [5KP18A-TP](#) [P6KE8.2A-TP](#)
[MPLAD30KP43CAE3](#) [SMAJ43A-TP](#) [D5V0F6U8LP33-7](#) [TVS5501V10MUT5G](#) [5.0SMLJ24CA-TP](#) [SMAJ110CA-TP](#) [MPLAD15KP75CAE3](#)
[MMAD1103e3/TR13](#) [DFLT40AQ-7](#)