


**DESCRIPTION:**


TVS diodes can be used in a wide range of applications which like consumer electronic products, automotive industries, munitions, telecommunications, aerospace industries, and intelligent control systems.



SOD-123FL

**FEATURES:**

- ✧ Low profile package.
- ✧ Low inductance.
- ✧ Excellent clamping capability.
- ✧ 400W peak pulse power capability at 10×1000µs waveform.
- ✧ Typical  $I_R$  less than 1µA above 10V.
- ✧ Fast response time: typically less than 1.0ps from 0V to  $V_{BR}$  min.
- ✧ High temperature reflow soldering: 260°C/40s at terminals.
- ✧ Plastic package has underwriters laboratory flammability 94V-0.
- ✧ Meets MSL level 1, per J-STD020, LF maximum peak of 260°C.
- ✧ For surface mounted applications in order to optimize board space.

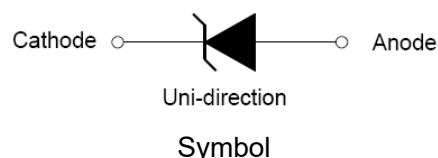
**ABSOLUTE MAXIMUM RATINGS** ( $T_A=25^\circ\text{C}$ , RH=45%-75%, unless otherwise noted)

Parameter	Symbol	Value	Unit
Storage and operating junction temperature range	$T_{STG}/ T_J$	-55 to +150	°C
Peak pulse power dissipation on 10/1000µs waveform	$P_{PP}$	400	W
Maximum instantaneous forward voltage at 20A for unidirectional	$V_F$	5.0	V
Typical thermal resistance junction to lead	$R_{\theta JL}$	100	°C/W
Typical thermal resistance junction to ambient	$R_{\theta JA}$	220	°C/W

**ELECTRICAL CHARACTERISTICS** ( $T_A=25^{\circ}\text{C}$ )

Part Number	$V_R$	$I_R@V_R$	$V_{BR}@I_T$		$I_T$	$V_C@I_{PP}$	$I_{PP}^{\text{①}}$
			min(V)	max(V)			
Uni-Polar	V	$\mu\text{A}$	min(V)	max(V)	mA	max(V)	A
SMF5.0AL	5.0	40	6.40	7.00	10	9.2	40.1
SMF6.0AL	6.0	40	6.67	7.37	10	10.3	35.9
SMF6.5AL	6.5	30	7.22	7.98	10	11.2	33.1
SMF7.0AL	7.0	30	7.78	8.60	10	12.0	30.9
SMF7.5AL	7.5	30	8.33	9.21	1	12.9	28.7
SMF8.0AL	8.0	20	8.89	9.83	1	13.6	27.2
SMF9.0AL	9.0	5	10.00	11.10	1	15.4	24.1
SMF10AL	10.0	2	11.10	12.30	1	17.0	23.5
SMF11AL	11.0	1	12.20	13.50	1	18.2	22.0
SMF12AL	12.0	1	13.30	14.70	1	19.9	20.1
SMF13AL	13.0	1	14.40	15.90	1	21.5	18.6
SMF14AL	14.0	1	15.60	17.20	1	23.2	17.2
SMF15AL	15.0	1	16.70	18.50	1	24.4	16.4
SMF17AL	17.0	1	18.90	20.90	1	27.6	14.5
SMF18AL	18.0	1	20.00	22.10	1	29.2	13.7
SMF20AL	20.0	1	22.20	24.50	1	32.4	12.3
SMF22AL	22.0	1	24.40	26.90	1	35.5	11.3
SMF24AL	24.0	1	26.70	29.50	1	38.9	10.3
SMF26AL	26.0	1	28.90	31.90	1	42.1	9.5
SMF28AL	28.0	1	31.10	34.40	1	45.4	8.8
SMF30AL	30.0	1	33.30	36.80	1	48.4	8.3
SMF33AL	33.0	1	36.70	40.60	1	53.3	7.5
SMF36AL	36.0	1	40.00	44.20	1	58.1	6.9

**ELECTRICAL CHARACTERISTICS**( $T_A=25^{\circ}\text{C}$ , continued)

Part Number	$V_R$	$I_R@V_R$	$V_{BR}@I_T$		$I_T$	$V_C@I_{PP}$	$I_{PP}^{①}$
			min(V)	max(V)			
Uni-Polar	V	$\mu\text{A}$			mA	max(V)	A
SMF40AL	40.0	1	44.40	49.10	1	64.5	6.2
SMF43AL	43.0	1	47.80	52.80	1	69.4	5.8
SMF45AL	45.0	1	50.00	55.30	1	72.7	5.5
SMF48AL	48.0	1	53.30	58.90	1	77.4	5.2
SMF51AL	51.0	1	56.70	62.70	1	82.4	4.9
SMF58AL	58.0	1	64.40	71.20	1	93.6	4.3
SMF60AL	60.0	1	66.70	73.70	1	96.8	4.1
SMF64AL	64.0	1	71.10	78.60	1	103.0	3.9
SMF70AL	70.0	1	77.80	86.00	1	113.0	3.5
SMF75AL	75.0	1	83.30	92.10	1	121.0	3.3
SMF78AL	78.0	1	86.70	95.80	1	126.0	3.2
SMF85AL	85.0	1	94.40	104.00	1	137.0	2.9


① Surge waveform: 10/1000 $\mu\text{s}$

$V_R$ : Stand-off voltage -- maximum voltage that can be applied

$V_{BR}$ : Breakdown voltage


$V_C$ : Clamping voltage -- peak voltage measured across the suppressor at a specified  $I_{PP}$

$I_R$ : Reverse leakage current

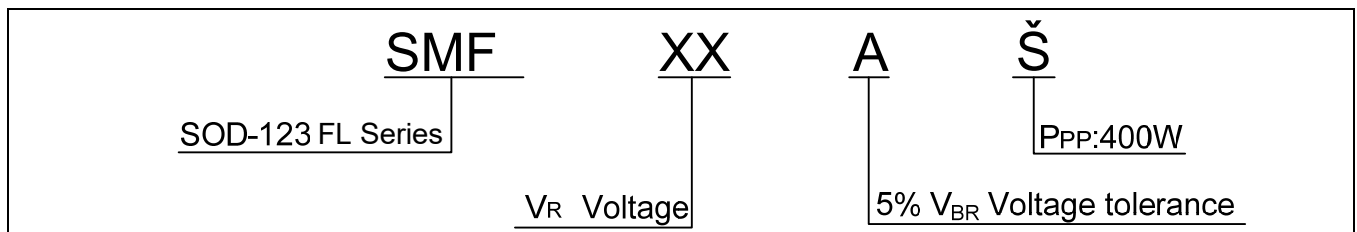
**ORDERING INFORMATION**


### RATINGS AND V-I CHARACTERISTICS CURVES ( $T_A=25^\circ\text{C}$ , unless otherwise noted)


**FIG.1: V- I curve characteristics (Uni-directional)**

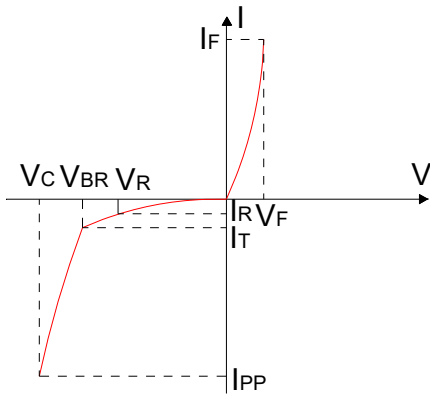

**FIG.2: Pulse waveform**

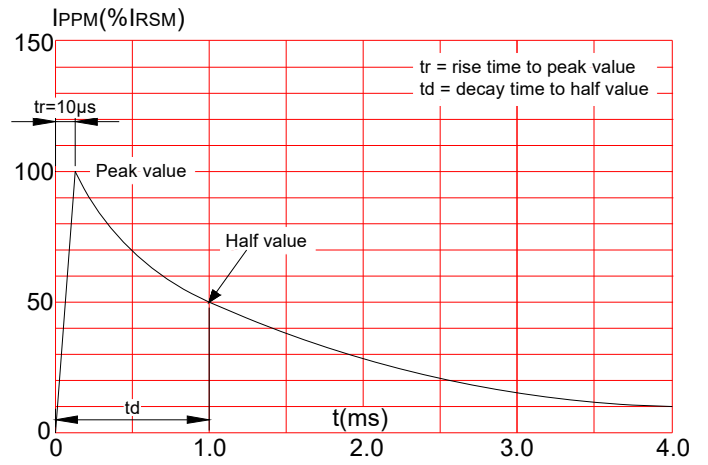


**FIG.3: Pulse derating curve**

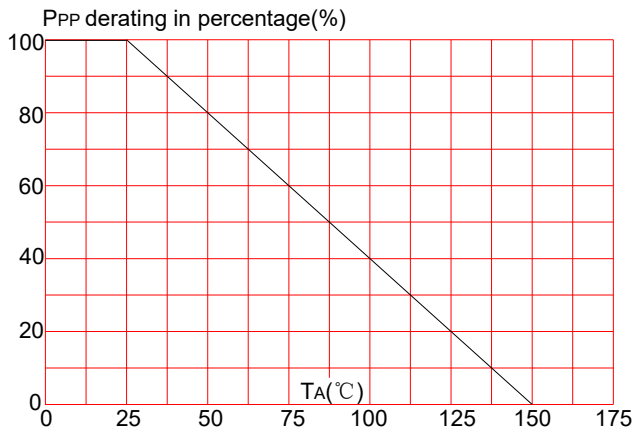


### SOLDERING PARAMETERS

Reflow Condition		Pb-Free assembly (see figure at right)
Pre Heat	-Temperature Min ( $T_{s(min)}$ )	+150°C
	-Temperature Max( $T_{s(max)}$ )	+200°C
	-Time (Min to Max) (ts)	60-180 secs.
Average ramp up rate (Liquidus Temp ( $T_L$ ) to peak)		3°C/sec. Max
$T_{s(max)}$ to $T_L$ - Ramp-up Rate		3°C/sec. Max
Reflow	-Temperature( $T_L$ )(Liquidus)	+217°C
	-Temperature( $t_L$ )	60-150 secs.
Peak Temp ( $T_p$ )		+260(+0/-5)°C
Time within 5°C of actual Peak Temp ( $t_p$ )		20-40secs.
Ramp-down Rate		6°C/sec. Max
Time 25°C to Peak Temp ( $T_p$ )		8 min. Max
Do not exceed		+260°C

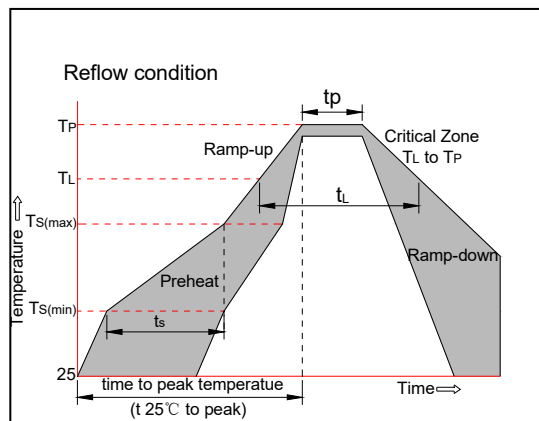


### PACKAGE MECHANICAL DATA

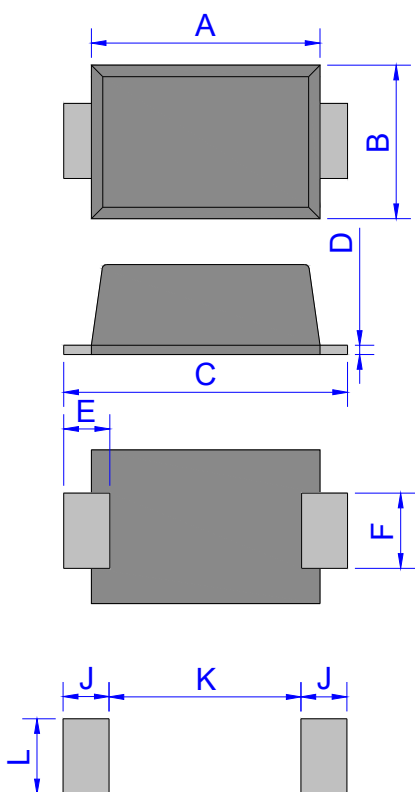

SOD-123FL

Ref.	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	2.60	3.00	0.102	0.118
B	1.60	2.00	0.063	0.079
C	3.45	3.95	0.136	0.156
D	0.10	0.25	0.004	0.01
E	0.3	0.9	0.012	0.035
F	0.80	1.20	0.031	0.047
G	0.95	1.35	0.037	0.053
J	1.30		0.051	
K		1.70		0.067
L	1.30		0.051	

### TAPE AND REEL SPECIFICATION-SOD-123FL

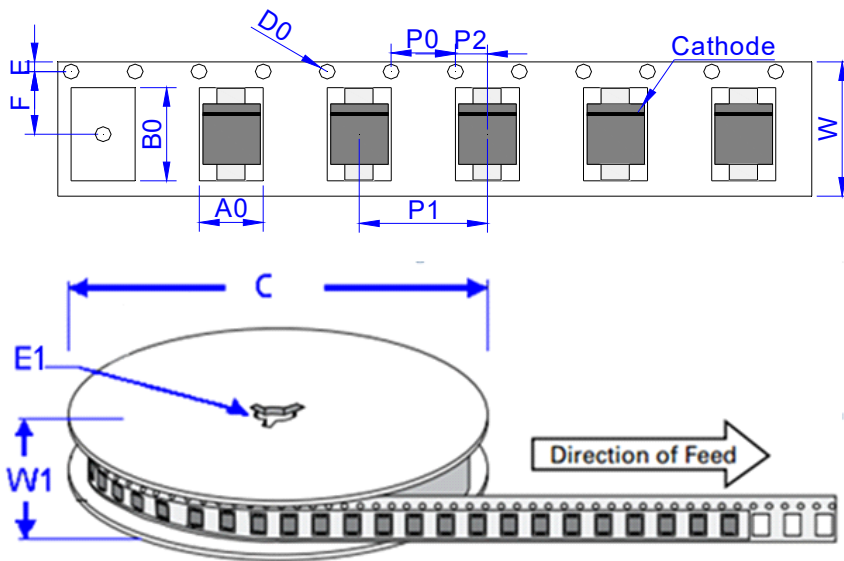

Ref.	Dimensions	
	Millimeters	Inches
A0	1.95 ± 0.3	0.077 ± 0.012
B0	3.95 ± 0.3	0.156 ± 0.012
C	178	7.0
D0	1.55 ± 0.1	0.061 ± 0.004
E	1.75 ± 0.2	0.069 ± 0.008
E1	13.3 ± 0.3	0.524 ± 0.012
F	3.50 ± 0.2	0.138 ± 0.008
P0	4.00 ± 0.2	0.157 ± 0.008
P1	4.00 ± 0.2	0.157 ± 0.008
P2	2.00 ± 0.2	0.079 ± 0.008
W	8.0 ± 0.2	0.315 ± 0.008
W1	11.5 ± 1.0	0.453 ± 0.039

OUTLINE	UNIT WEIGHT (g/PCS) typ.	PACKAGE TYPE	REEL (PCS)	DESCRIPTION
TAPING	0.0136	SOD-123FL	3000	7 inch reel pack

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:*

*Click to view products by [Me-TECH](#) manufacturer:*

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [DESD5V0U1BB-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#) [P6KE8.2A](#)  
[SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD105-B1-02EL E6327](#) [ESD112-B1-02EL E6327](#) [ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)  
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DESD5V0U1BL-7B](#) [DRTR5V0U4SL-7](#)  
[SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [SMF8.0A-TP](#) [SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#) [VESD12A1A-](#)  
[HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [D1213A-02WL-7](#)  
[1SMB33CAT3G-XYZ](#) [MMAD1108/TR13](#) [5KP100A](#) [5KP15A](#) [5KP18A](#) [5KP48A](#)