

Terminal blocks

to **Type 220** and **Type 179**

- ASP046** page 50
- Type 213** page 100
- Type 214** page 100
- Type 249** page 98
- Type 250** page 98

Accessories

for **Type 220** and **Type 179**
Coding set
 700024 page 206

Note for Type 179

Packaging for automated processing is available on demand. Please do not hesitate to contact us.


Type 220

Header, centerline 5.08 mm / 0.200 inches, vertical mounting, square contact pins 1 mm / 0.039 inches, closed ends, codable

Technical Data

| | | | | |
|--|-------|---------------------|--|--|
| | V / A | 300 / 15 | | |
| | V / A | 300 / 15 | | |
| | | 250 V / 4 kV / 10 A | | |
| Insulation co-ordination according to EN 60664-1 | | | | |
| Clearance and creepage distances min. 4.08 mm | | | | |
| Insulating material class CTI 600 | | | | |
| Overvoltage category III III II | | | | |
| Pollution degree 3 2 2 | | | | |
| Rated voltage 320 800 800 | | | | |
| Rated test voltage 4 6 4 | | | | |
| Protection category according to IEC 529 IP00 | | | | |
| Solder pin dimension 1.0 x 1.0 mm | | | | |
| Recommended pc board hole dia. Ø 1.5 mm | | | | |
| Solder pin length 3.25 mm | | | | |
| Pole size 2 - 24 | | | | |
| Color black | | | | |

Dimensions in mm 1 mm = 0.0394 in.

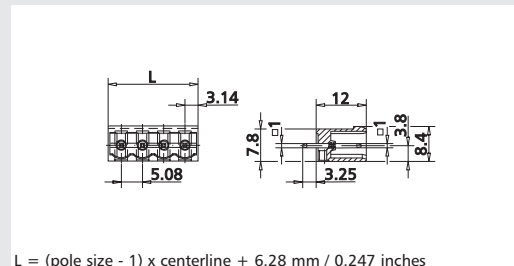

$L = (\text{pole size} - 1) \times \text{centerline} + 6.28 \text{ mm} / 0.247 \text{ inches}$

Part numbers (P/N)

(information: page 110)

Complete the part number by adding the pole size.

Type 220

centerline 5.08 mm / 0.200 inches

P/N 312201

| | | | | | | | |
|--|----|----|----|----|----|----|----|
| | 02 | 03 | 04 | 05 | 06 | 07 | 08 |
| | 09 | 10 | 11 | 12 | 13 | 14 | 15 |
| | 17 | 18 | 19 | 20 | 21 | 22 | 23 |
| | 24 | | | | | | |

Type 220

centerline 10.16 mm / 0.400 inches

P/N 312202

| | | | | | | | |
|--|----|----|----|----|----|----|----|
| | 02 | 03 | 04 | 05 | 06 | 07 | 08 |
| | 09 | 10 | 11 | 12 | | | |
| | | | | | | | |
| | | | | | | | |

- Standard pole sizes
- Available on demand. Minimum order quantity 5000 pieces per item.


Type 179

Header, centerline 5.08 mm / 0.200 inches, vertical mounting, designed for THR, optional Tape on Reel packaging for automated processing, square contact pins 1 mm / 0.039 inches, closed ends, codable

Technical Data

| | | | | |
|--|--|---------------------|--|--|
| | | 250 V / 4 kV / 10 A | | |
| Insulation co-ordination according to EN 60664-1 | | | | |
| Clearance and creepage distances min. 4.08 mm | | | | |
| Insulating material class CTI 600 | | | | |
| Overvoltage category III III II | | | | |
| Pollution degree 3 2 2 | | | | |
| Rated voltage 320 800 800 | | | | |
| Rated test voltage 4 6 4 | | | | |
| Protection category according to IEC 529 IP00 | | | | |
| Solder pin dimension 1.0 x 1.0 mm | | | | |
| Recommended pc board hole dia. Ø 1.5 mm | | | | |
| Solder pin length 3.25 mm | | | | |
| Pole size 2 - 12 | | | | |
| Color black | | | | |

Dimensions in mm 1 mm = 0.0394 in.

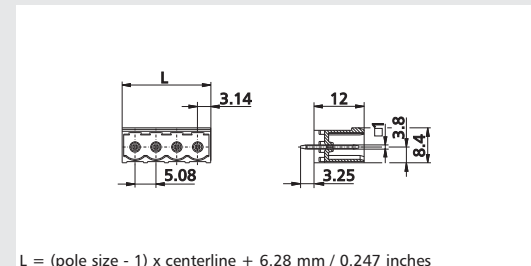

$L = (\text{pole size} - 1) \times \text{centerline} + 6.28 \text{ mm} / 0.247 \text{ inches}$

Part numbers (P/N)

(information: page 110)

Complete the part number by adding the pole size.

Type 179

centerline 5.08 mm / 0.200 inches

P/N 311791

| | | | | | | | |
|--|----|----|----|----|----|----|----|
| | 02 | 03 | 04 | 05 | 06 | 07 | 08 |
| | 09 | 10 | 11 | 12 | | | |
| | | | | | | | |
| | | | | | | | |

* approval pending

- Standard pole sizes
- Available on demand. Minimum order quantity 5000 pieces per item.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pluggable Terminal Blocks](#) category:

Click to view products by [Metz](#) manufacturer:

Other Similar products are found below :

[57.510.0053](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [734-104](#) [734-302](#) [860505](#) [860516](#) [860810](#) [GBPACX-12](#) [93.731.4953.0](#) [PV05-5,08-K](#) [PVP03-3,50](#) [PVP04-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFP03110](#) [ELFT07250](#) [ELVD12100](#) [ELVF09400](#) [ELVP03100](#) [ELXH071G0E](#) [1700101](#) [1700410](#) [1702246](#) [1705229](#) [1710175](#) [1714537](#) [1717806](#) [1719600](#) [1728941](#) [1734692](#) [1734795](#) [1740291](#) [1740628](#) [1740990](#) [1746952](#) [1750207](#) [1752865](#) [1754115](#) [1754144](#) [1756913](#) [1760051](#) [1760336](#) [1765111](#) [1776388](#) [1777701](#) [1783410](#)