



SYM	DESCRIPTION	APPROVED	DATE
1			
2			
3			
4			

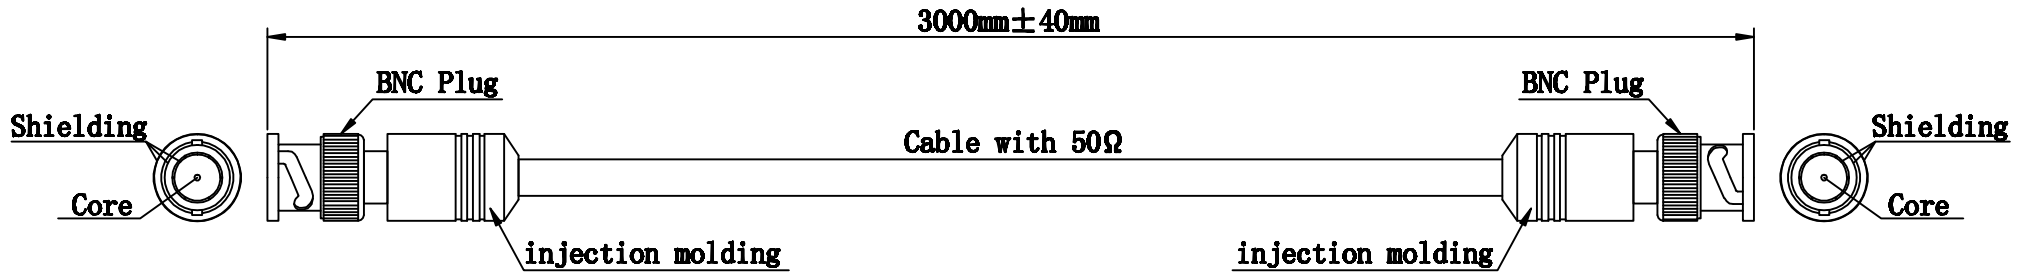

BNC connector cable (RG58), shielded
Connectors: 2x BNC male
Contacts: nickel-plated (gold-plated pins)
Conductor area: 0.636 mm²
AWG: 20
Composition of conductor: 1 x 0.90 mm
Conductor material: CCS
Insulation material: PE
Jacket material: PVC
Conductor resistance: 500 ± 10 Ω/km
Shielding: 35 % coverage
Capacitance: 54 ± 5 pF/m
Cable OD: 5.0 ± 0.2 mm
Weight: 30 ± 2 g/m

13			
12			
11			
10			
9			
8			
7			
6			
5			
4			
3			
2			
1			
SYM	Name	Description	Remarks

Tolerance (mm)			
Wire harness size L(mm)	Trunk	Protection tube	Positioning space
L ≤ 200	+20 -10		±5
200 < L ≤ 500	+25 -10		±5
500 < L ≤ 1000	+40 -20		±10
1000 < L ≤ 2000	+60 -30		±20
2000 < L ≤ 3000	+80 -40		±30
3000 < L ≤ 5000	+100 -50		±30
L > 5000	+150 -80		±40



APPROVED	Shen Juan		
CHECKED	Li Jie		
DRAWN	Zhang Yining	Customer :	Date : 2023-10-19
UNIT	mm	DRAWING NO.	BNC-050-3.0
REV	1	CUSTOMER NO.	PAGE: 1/1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Cable Assemblies](#) category:

Click to view products by [MFG manufacturer](#):

Other Similar products are found below :

[6772459-7](#) [73419-4660](#) [73-6353-3](#) [73-6364-6](#) [R285001001](#) [145111-05-12.00](#) [1655303-1](#) [1661-C-24](#) [1801171170914KE](#) [1905715](#)
[24P104C24J1-012](#) [24P204C24J1-003](#) [FCB-3030-ALT](#) [21117-046](#) [21117-050](#) [24P103C24P2-003](#) [PTWY-24-78](#) [R284008001](#) [R285001021](#)
[R288940003](#) [R288940034](#) [4814-BB-24](#) [5260-72](#) [4814-K-48](#) [115101-09-06.00](#) [MXHT83QE3000](#) [73-6351-25](#) [81-6201-1600](#)
[1800920920610PJ](#) [GD0BQ0BQ024.0](#) [R288940002](#) [PT82NSMA](#) [BNC TO SMA Cable](#) [PT815NN](#) [MF53/1x8A_21MXP/11SK/305](#)
[2001481480914ZT](#) [32026-29094-29094-36TC](#) [89761-3417](#) [PT89TT](#) [PT8X2NT](#) [0HR01R020360](#) [G2R01R010240](#) [0K0CJ0CQ0240](#)
[GD0BPZ3G0120](#) [0D0CP0CQ0720](#) [0SR01R010120](#) [0Z0CK0CQ0120](#) [0SQ01Q010480](#) [2001481481219ZT](#) [R284C0351020](#)