

36 SERIES

HIGH CURRENT ▲ Si MOSFET RELAY

SILICON Si MOSFET RELAY ▲ DIP and SMD type
 Switches AC or DC load
 2500mA load current
 Input TTL / CMOS compatible
 Moisture Sensitivity Level ▲ MSL 1
UL 1577 approved ▲ File no E344988

SPECIFICATION

Item	Characteristics	
Contact Form	1 Form A ▲ Normally open switch	
Load Voltage	V_L	60V
Operation LED Current	I_{FON}	3mA
Load Current	I_L	2500mA
On-Resistance	R_{ON}	0.07Ω
Output Capacitance	C_{OUT}	470pF
Low Off-State Leakage Current	I_{LEAK}	1μA at 60V _{DC}

APPLICATIONS

Automatic Test Equipment	I/O Modules	Industrial Automation	Measurement Equipment	Security Equipment	Sensing Equipment	Telecom Equipment

DIMENSIONS

Package	Illustration	Dimensions	PCB Board Pattern
DIP-6			<p style="text-align: right;">BOTTOM VIEW</p>
SMD-6			<p style="text-align: right;">TOP VIEW</p>

ABSOLUTE MAXIMUM RATINGS ▲ AMBIENT TEMPERATURE $T_A = 25^\circ\text{C}$

Item	Condition	Symbol	Value	Unit
Type	Outline package		DIP-6	SMD-6
	Part number		AA36	AA36F
	Output channels		1	1
Input	Continuous LED Current		I_F	50
	Peak LED Current	100 Hz, Duty 1%	I_{FP}	500
	LED Reverse Voltage		V_R	5
	Input Power Dissipation		P_{IN}	75
Output	Load Voltage		V_L	60 (AC peak or DC)
	Load Current	Connecting A	I_L	2500 (AC or DC)
		Connecting B		3500 (DC)
		Connecting C		5000 (DC)
	Peak Load Current	1 ms, 1 shot	I_{PEAK}	6000
Output Power Dissipation		P_{OUT}	500	
Relay	Total Power Dissipation		P_T	550
	I/O Breakdown Voltage		$V_{I/O}$	3750
	I/O Breakdown Voltage (Suffix-H)		$V_{I/O}$	5000
	Operating Temperature Range		T_{OPR}	-40 to +85
	Storage Temperature Range		T_{STG}	-40 to +100

ELECTRICAL CHARACTERISTICS ▲ AMBIENT TEMPERATURE $T_A = 25^\circ\text{C}$


Item	Condition	Symbol	Min.	Typ.	Max.	Unit
Input	LED Forward Voltage	$I_F = 10\text{mA}$	V_F	1	1.37	1.5
	Operation LED Current		$I_{F\text{ON}}$		1.5	3
	Recovery LED Voltage		$V_{F\text{OFF}}$	0.5	1	
Output	On-Resistance	$I_F=5\text{mA}, I_L=\text{Rating}$	R_{ON}	0.07	0.1	Ω
	Drain to Drain (tested within 1 sec.)					
	Off-State Leakage Current	$V_L = 60\text{V}$	I_{LEAK}			1
	Output Capacitance	$V_L=0\text{V}, f=1\text{MHz}$	C_{OUT}		470	μF
Trans- mission	Turn-On Time	$I_F=10\text{mA}, I_L=\text{Rating}$	t_{ON}		0.6	3
	Turn-Off Time	$I_F=10\text{mA}, I_L=\text{Rating}$	t_{OFF}		0.04	0.5
Coupled	I/O Insulation Resistance		$R_{I/O}$	5×10^9		Ω
	I/O Capacitance	$f=1\text{MHz}$	$C_{I/O}$		1	pF

PIN DESCRIPTION AND PART NUMBER


Circuit Diagram	Pin Description	Part No.	Package	Packing
	1 Anode (+) ▪ LED 2 Cathode (-) ▪ LED 3 NC 4,6 Drain ▪ MOSFET 5 Source ▪ MOSFET	AA36 AA36F AA36F-R1	DIP-6 SMD-6 SMD-6	Tube (50pcs) Tube (50pcs) Reel (1 000pcs)

REFERENCE DATA


Load current vs. ambient temp.




On resistance vs. ambient temp.

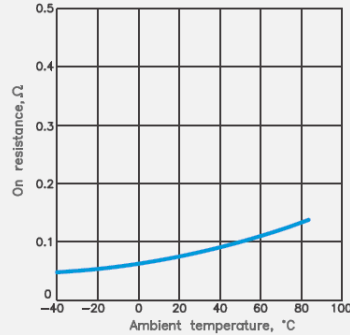


Turn on time vs. ambient temp.

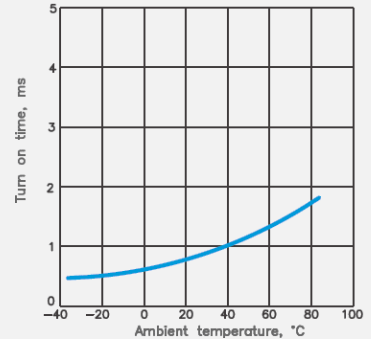


Turn off time vs. ambient temp.




LED operate current vs. ambient temp

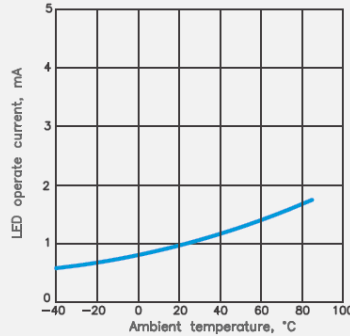


LED turn off current vs. ambient temp.

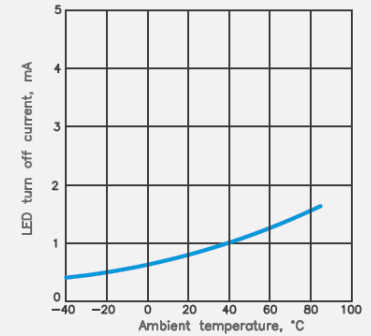


LED forward voltage vs. ambient temp.

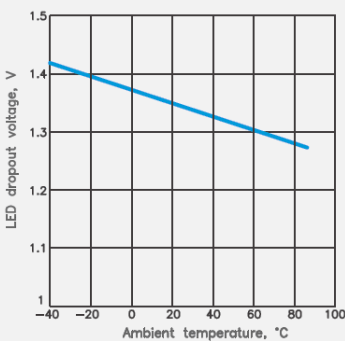


Current vs. voltage characteristics of output at MOS portion




Off state leakage current vs. load voltage

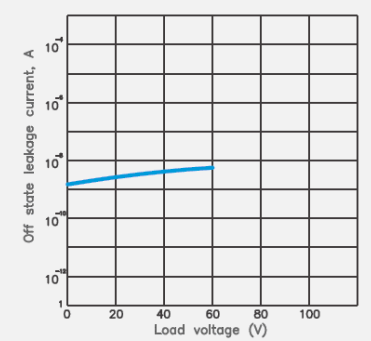


Turn on time vs. LED forward current




Turn off time vs. LED forward current

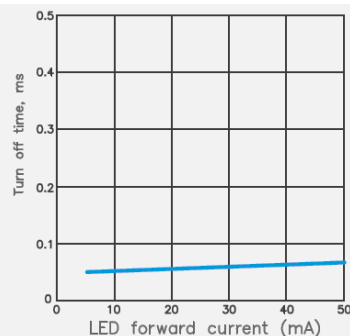

Output capacitance vs. applied voltage

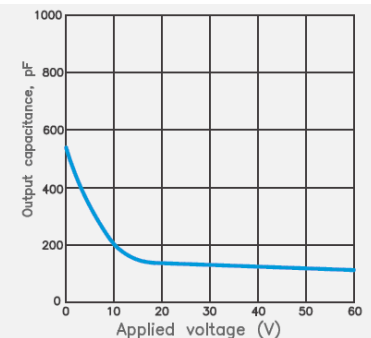


REEL DIMENSIONS ▲ All dimensions in mm

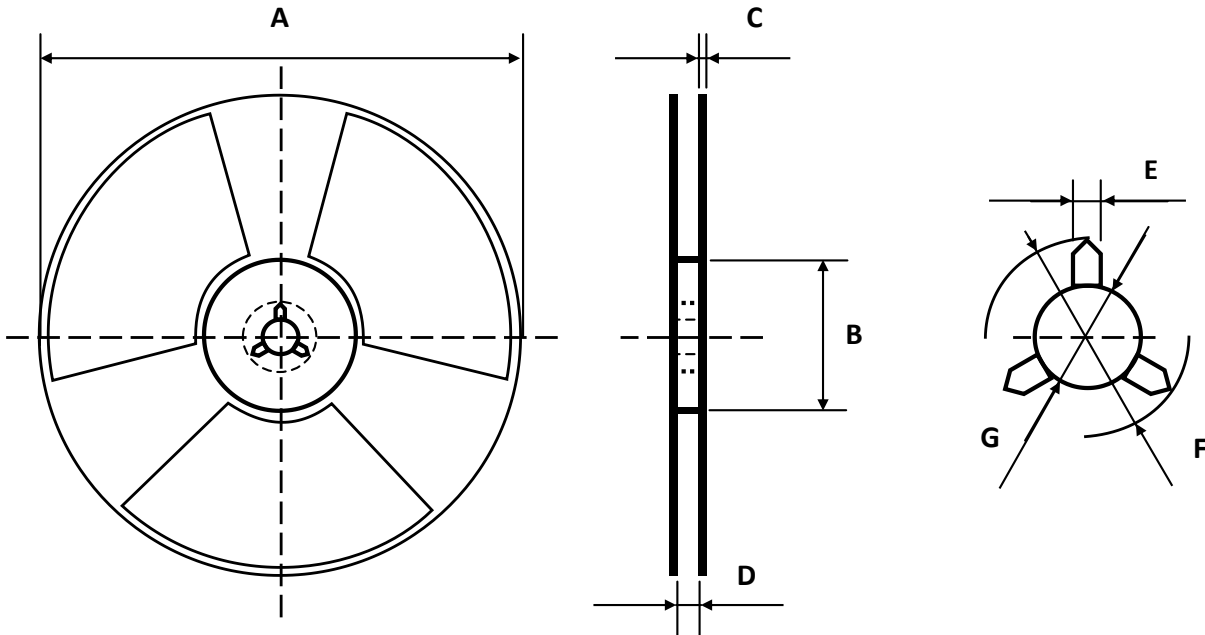

Size	A	B	C	D	E	F	G
SMD-6	380	80	2.2	17	2	13	21

TAPE DIMENSIONS ▲ All dimensions in mm

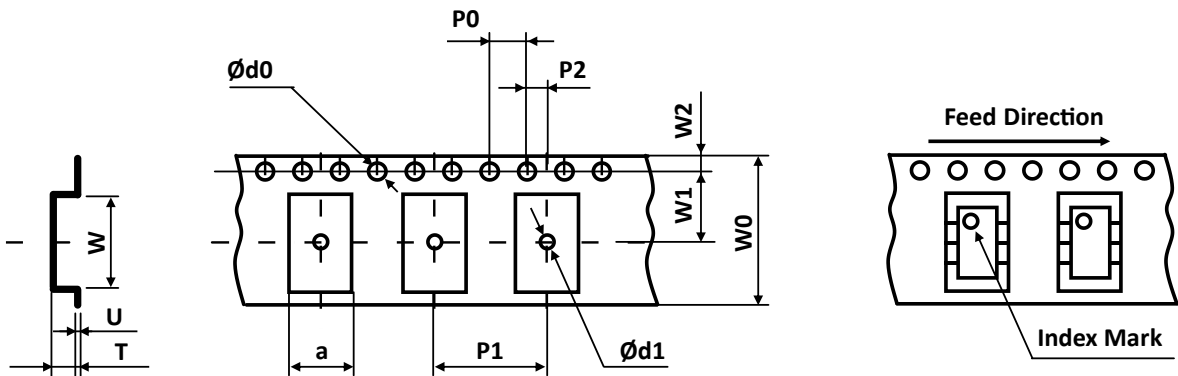

Size	W	U	T	a	Ød0	Ød1	P0	P1	P2	W0	W1	W2
SMD-6	9.15	0.3	4.45	10.4	1.5	1.5	4	16	2	16	11.5	1.75

PACKING QUANTITIES

Tape and Reel Packing	PCS/Reel
SMD-6	1000


Tube Packing	PCS/Tube	Tubes/Box	Units/Box
DIP-6	50	30	1500

STORAGE AND HANDLING CONDITIONS


ESD level	Floor life	Conditions	MSL
HBM class 2	Unlimited	$T_A < 30^\circ\text{C}$, RH < 85%	1

LOAD CONNECTING METHOD

Type	Load	Connection	Feature
6 pins	A AC or DC		Control bi-directional signal
	B DC		On-resistance is 1/2 of A-connection 2-Make-contacts (Source Common)
C DC		On-Resistance is 1/2 of B-connection	

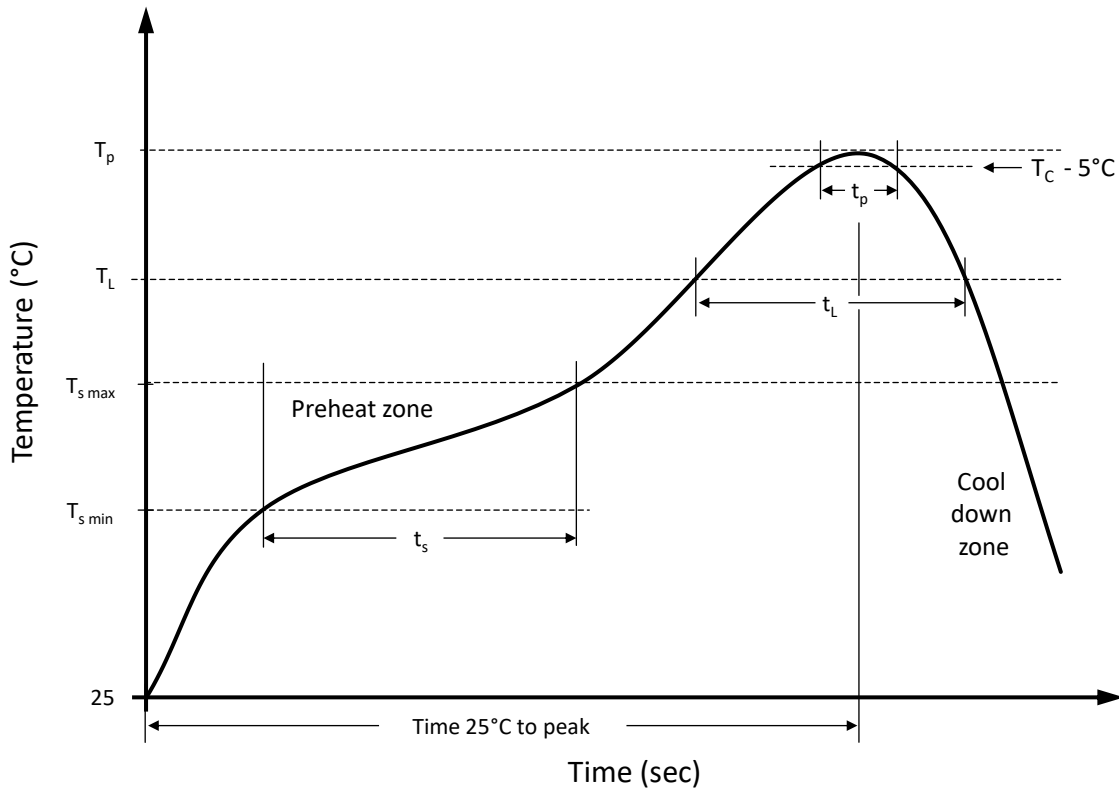RECOMMENDED REFLOW SOLDERING PROFILE ▲ SMD PACKAGE

Recommended reflow soldering conditions ▲ Refer to JEDEC J-STD-020E

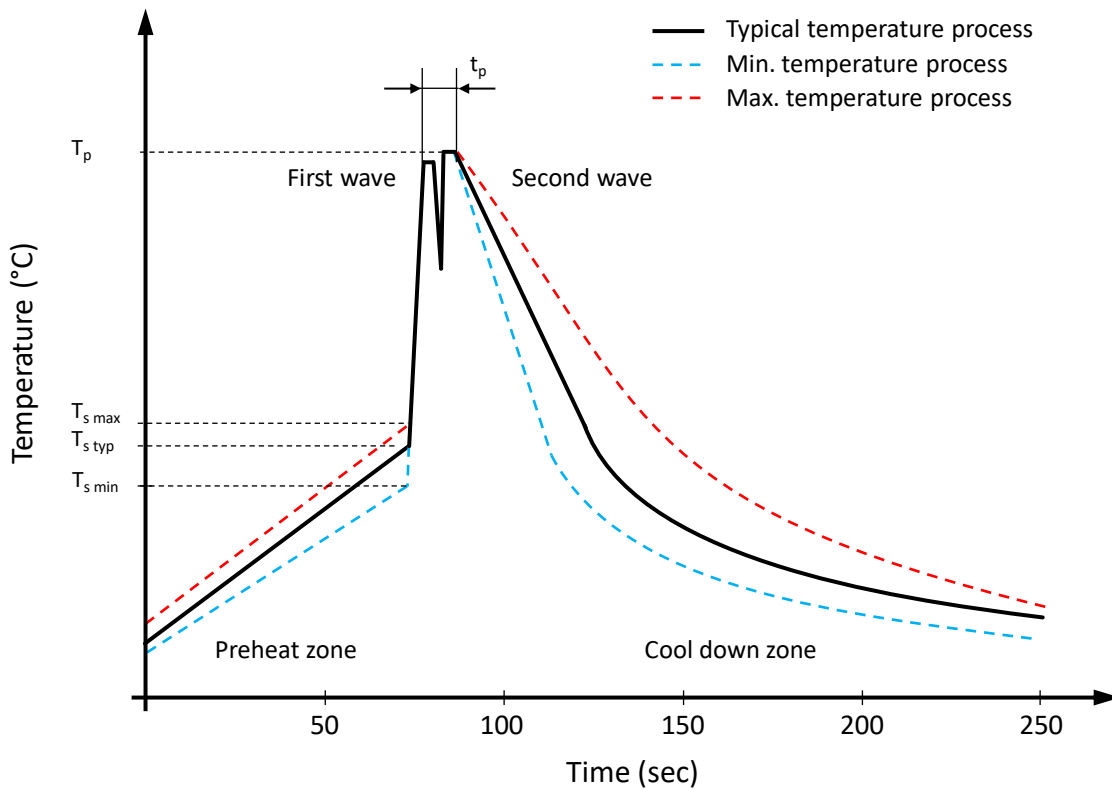Profile Features		Sn-Pb Eutetic Assembly	Pb-Free Assembly
Preheat temperature min.	$T_{s \min}$	100 °C	150 °C
Preheat temperature max.	$T_{s \max}$	150 °C	200 °C
Preheat time t_s from $T_{s \min}$ to $T_{s \max}$	t_s	120 seconds	120 seconds
Ramp-up rate (T_L to T_p)		max. 3 °C/second	max. 3 °C/second
Liquidous temperature	T_L	183 °C	217 °C
Time t_L maintained above T_L	t_L	150 seconds max.	60 seconds max.
Peak package body temperature	T_p	235°C	260°C
Timeframe of within 5°C below and up to max actual peak body temperature	t_p	20 seconds max.	30 seconds max.
Ramp-down rate (T_L to T_p)		max. 6 °C/second	max. 6 °C/second
Time 25°C to peak temperature		max. 6 minutes	max. 8 minutes

RECOMMENDED WAVE SOLDERING PROFILE ▲ THT PACKAGE

Classification wave soldering profile ▲ Refer to EN 61760-1: 2006

Profile Features		Value ▲ Sn-Pb Assembly	Value ▲ Pb-free Assembly
Preheat temperature min.	$T_{s \min}$	100 °C	100 °C
Preheat temperature typical	$T_{s \text{ typ}}$	120 °C	120 °C
Preheat temperature max.	$T_{s \max}$	130 °C	130 °C
Preheat time t_s from $T_{s \min}$ to $T_{s \max}$	t_s	70 seconds	70 seconds
Peak temperature	T_p	235 °C to 260 °C	245 °C to 260 °C
Time of actual peak temperature	t_p	Max. 10 seconds Max. 5 second each wave	Max. 10 seconds Max. 5 second each wave
Ramp-down rate min.		~ 2 °C/second	~ 2 °C/second
Ramp-down rate typical		~ 3.5 °C/second	~ 3.5 °C/second
Ramp-down rate max.		~ 5 °C/second	~ 5 °C/second
Time 25°C to 25°C		4 minutes	4 minutes


PRODUCT CODE

Example: AA36F series ▲ 1 Form A ▲ 60V ▲ SMD-6 ▲ Tape & Reel

AA		36		-		F		R1	
Package		Series		Special Suffix		Type		Packing	
AA	6 Pin ▲ 1 Form A	36	60V	Blank H	Standard High Insulation	Blank F	DIP SMD	Blank R1	Tube Reel

PRODUCT MARKING

Example: AA36F series ▲ 1 Form A ▲ 60V ▲ SMD-6 ▲ Tape & Reel

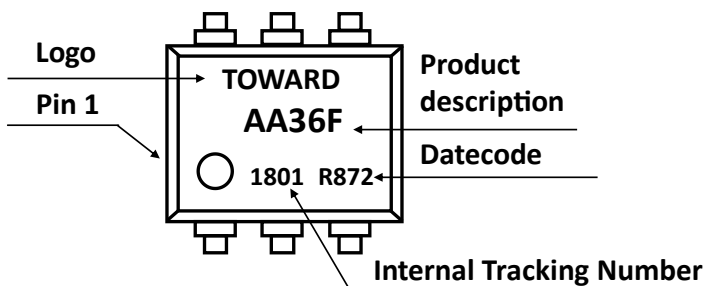

DATE CODE

Example: R872

R		8		7		2	
Material Characteristics		Year		Month		Week of the Month	
R	RoHS compliant	8	2018	1	Jan	1	1 st
		9	2019	2	Feb		
		A	2020	3	Mar		
		B	2021	4	Apr		
H	Halogen free	C	2022	5	May	3	3 rd
		4	4 th
		G	2026	12	Dec		

RELIABILITY TESTS ▲ STANDARD

Standard: JESD22-A

No.	Test	Test Specification	Test Standard	Test Limits
1	Moisture Sensitivity Level Test	Bake condition: Temperature: 125°C; Duration 24 hours Soak condition: Temperature: 30°C; Humidity: 60% RH Duration 192 hours Reflow condition: Peak temperature: 260°C Duration: 3 cycles	JESD22-A113H	No abnormal phenomenon was found. Functional test passed.
2	High Temperature Storage Test	Temperature: 150°C Duration: 500 hours	JESD22-A103E	No abnormal phenomenon was found. Functional test passed.
3	Temperature Cycling Test	Temperature range: -55°C to +125°C -55°C for 30 minutes +125°C for 30 minutes Duration: 100 cycles with 1 cycle = 70 minutes	JESD22-A104E	No abnormal phenomenon was found. Functional test passed.
4	Low Temperature Storage Test	Temperature: -40°C Duration: 500 hours	JESD22-A119E	No abnormal phenomenon was found. Functional test passed.
5	Temperature & Humidity Storage Test	Temperature: 85°C Humidity: 85% RH Duration: 500 hours	JESD22-A101D	No abnormal phenomenon was found. Functional test passed.
6	Highly Accelerated Temperature and Humidity Stress Test	Temperature: 130°C Humidity: 85% RH Duration: 96 hours	JESD22-A-118B	No abnormal phenomenon was found. Functional test passed.

REVISION TABLE

Revision	Date	Status	Notes
001	01/10/2021	Initial release	Initial publication

DISCLAIMER

Except for the written expressed warranties, MGT does not implicitly, by assumption or whatever else, warrant, undertake, promise any other warranty or guaranty for any MGT product.

All information and technical specifications made available by MGT are for guidance only and we reserve the right to change or modify them without prior notice. Unless expressly stated in writing by MGT, we reject any guarantees, obligations, or warranties.

All MGT products with the technical specifications described are suitable for use in certain applications. Operating, production, storage and environmental conditions can have a massive influence on the parameters mentioned in the data sheets, which cause the performance to vary over time.

It is subject to the user's duty of care to design and validate his products in such a way that appropriate measures are taken, such as protective circuits or redundant systems to ensure the safety standards required in the application.

MGT components are not designed or rated for use in life support, rescue, safety critical, military, or aerospace applications where failure or malfunction could result in property or environmental damage, serious injury or death. In the aforementioned cases, please contact us before using MGT products.

In principle, we reserve all rights and MGT's general terms and conditions apply. You can find them on our website www.mgt.co.com.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Transistor Output Optocouplers](#) category:

Click to view products by [MGT Brightek](#) manufacturer:

Other Similar products are found below :

[LTV-814S-TA](#) [LTV-8241S](#) [LTV-852S](#) [66095-001](#) [PS2561-1-A](#) [PS2561A-1-W-A](#) [PS2561L1-1-A](#) [PS2561L-1-V-A](#) [PS2706-1-A](#) [PS2815-1-A](#)
[MRF658](#) [ILD2-X006](#) [ILQ615-3X016](#) [LDA102S](#) [SFH615A-4XSM TR](#) [PS2561DL-1Y-F3-A](#) [PS2561L1-1-L-A](#) [PS2562-1-V-A](#) [PS2565L-1-A](#)
[PS2581L2-A](#) [PS2701A-1-F3-P-A](#) [PS2711-1-A](#) [PS2801-1-F3-P-A](#) [PS2833-4-A](#) [PS2841-4A-AX](#) [LTV-702FS](#) [LTV-702V](#) [LTV-702VB](#) [LTV-](#)
[816S-TA](#) [LTV-825S](#) [TCET2100](#) [TLP290-4\(E\(T](#) [IL215AT](#) [WPPC-A11066AA](#) [WPPC-A11066AD](#) [WPPC-A11084ASS](#) [WPPC-A21068AA](#)
[WPPC-D11066AA](#) [WPPC-D21068ED](#) [WPPC-D410616EA](#) [WPPC-D410616ED](#) [X4IAC24A](#) [4N26-X001](#) [EL1010\(TA\)-VG](#) [SFH600-2X007](#)
[TCMT1118](#) [VO206AT](#) [WPPC-D21068EA](#) [WPPC-D11064AD](#) [WPPC-A410616AD](#)