


TECHNICAL SPECIFICATIONS

Material:	UL recognised Plastic Material
Plating:	Nickel over Copper
Operating Temperature:	-40°C to +120°C
Cable Entry:	Top Entry
Thumbscrews:	UNC 4-40 (Short)
Cable O.D:	Up to 13mm

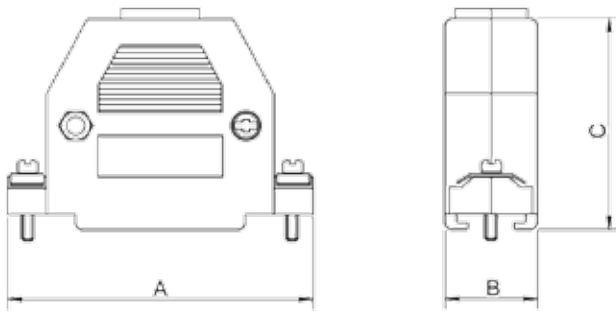

Size	Dim A	Dim B	Dim C
9-way	31,0	16,0	40,2
15-way	39,6	17,4	38,0
25-way	55,0	16,5	44,5
37-way	69,0	24,0	52,5
50-way	69,5	19,5	44,5

Features:

- Available in sizes 9-15-25-37-50
- Re-openable
- Also available in Unshielded version, See page 13

Ordering information: *Short Jackscrews*

Size:	P/N - Kitted:	Product Code:
9-way	2360-0105-01	MHCCOV 9-SC-MP
15-way	2360-0105-02	MHCCOV15-SC-MP
25-way	2360-0105-03	MHCCOV25-SC-MP
37-way	2360-0105-04	MHCCOV37-SC-MP
50-way	2360-0105-05	MHCCOV50-SC-MP

Long Jackscrews

Size:	P/N - Kitted:	Product Code:
9-way	2360-0105-11	MHCCOV 9-SCL-MP
15-way	2360-0105-12	MHCCOV15-SCL-MP
25-way	2360-0105-13	MHCCOV25-SCL-MP
37-way	2360-0105-14	MHCCOV37-SCL-MP
50-way	2360-0105-15	MHCCOV50-SCL-MP

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Heavy Duty Power Connectors](#) category:

Click to view products by [MH Connectors](#) manufacturer:

Other Similar products are found below :

[1424439](#) [1424438](#) [09330062652](#) [2-8675P1](#) [580129-2](#) [605601-1](#) [6340G1](#) [6341G1](#) [6360G1](#) [6373G1](#) [6374g2](#) [6396G1](#) [647757-1](#) [66394-4](#)
[6643411-1](#) [6646058-2](#) [6646137-1](#) [6646138-1](#) [6646348-1](#) [6646479-1](#) [6646608-1](#) [6646786-1](#) [6646940-1](#) [6651091-1](#) [6651525-1](#) [6651529-1](#)
[6651778-1](#) [6651788-1](#) [696465-1](#) [696475-1](#) [73000005059](#) [73000005349](#) [73000005642](#) [73080255059](#) [73080965046](#) [765-15-0080A](#)
[765-16-0080B](#) [789.700-44](#) [789.700-54](#) [80-1010](#) [80-9](#) [827381-1](#) [829992-1](#) [902-77-02113](#) [PL00U-301-10D10](#) [PM103MOOLOO](#)
[PM16S1620S32-50](#) [PM212MOOLOO](#) [PM309FOOLOO](#) [PM324FOOLCH](#)