




## General Description

The DSC8004 is a programmable silicon MEMS based CMOS oscillator offering excellent jitter and stability performance over a wide range of supply voltages and temperatures. The device operates from 1 to 150MHz in increments of 100Hz (up to four decimal point resolution) with supply voltages between 1.8 to 3.3 Volts and extended temperatures from -40°C to 105°C. The DSC8004 has the same functionality and performance as the DSC8001 but with greater output drive ( $C_L=40\text{pf}$ ).

The DSC8004 incorporates an all silicon resonator that is extremely robust and nearly immune to stress related fractures, common to crystal based oscillators. Without sacrificing the performance and stability required of today's systems, a crystal-less design allows for a higher level of reliability, making the DSC8004 ideal for rugged, industrial, and portable applications where stress, shock, and vibration can damage quartz crystal based systems.

Available in industry standard packages, the DSC8004 can be "dropped-in" to the same PCB footprint as standard crystal oscillators.

## Block Diagram

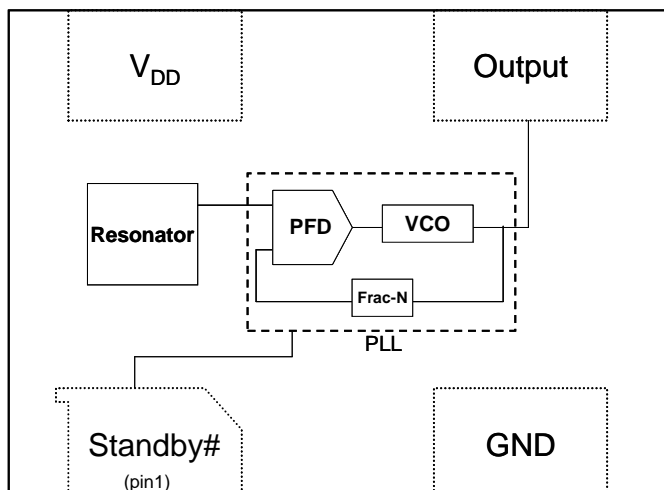

## Features

- Frequency Range: Programmable from 1 to 150MHz
- Exceptional Stability over Temperature
  - $\pm 20$  PPM ,  $\pm 25$  PPM,  $\pm 50$  PPM
- Operating voltage
  - 1.71 to 3.60V
- Operating Temperature Range
  - Ext. Industrial -40°C to 105°C
  - Industrial -40°C to 85°C
  - Ext. Commercial -20°C to 70°C
- Low Operating and Standby Current
  - 8mA Operating (40MHz)
  - 15uA Standby
- Ultra Miniature Footprint
  - 2.5 x 2.0 x 0.85 mm
  - 3.2 x 2.5 x 0.85 mm
  - 5.0 x 3.2 x 0.85 mm
  - 7.0 x 5.0 x 0.85 mm
- Excellent shock and Vibration Resistance
- Lead Free, RoHS & Reach SVHC Compliant

## Benefits

- Pin for pin "drop in" replacement for industry standard oscillators
- Semiconductor level reliability, significantly higher than quartz
- Frequency Resolution to 4 decimals
- Short mass production lead-times
- Longer Battery Life / Reduced Power
- Compact Plastic package
- Cost Effective


## Applications

- Mobile Applications
- Consumer Electronics
- Portable Electronics
- CCD Clock for VTR Cameras
- Low Profile Applications
- Industrial

## Absolute Maximum Ratings<sup>1</sup>

Item	Min.	Max	Unit	Condition
Supply Voltage	-0.3	+4.0	V	
Input Voltage	-0.3	VDD+0.3	V	
Junction Temp	-	+150	°C	
Storage Temp	-55	+150	°C	
Soldering Temp	-	+260	°C	40 sec max.
ESD	-		V	
HBM		4000		
MM		200		
CDM		1500		

## Ordering Code

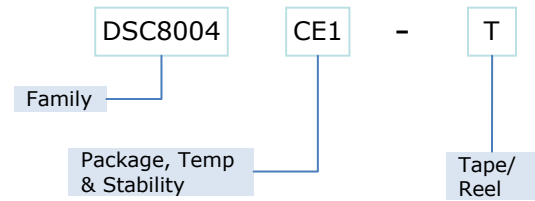

\* See Ordering Information for details

## Recommended Operating Conditions

Parameter	Symbol	Range
Supply Voltage	V <sub>DD</sub>	1.71 – 3.60V
Output Load	Z <sub>L</sub>	R>10KΩ, C≤40pF
Operating Temperature	T	-40 to +105 °C
Option 1		-40 to +85 °C
Option 2		-20 to +70 °C

## Specifications (VDD = 1.8 to 3.3v) T<sub>A</sub>=85<sup>0</sup>C unless otherwise specified

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Frequency	f <sub>0</sub>	Single Frequency	1		150	MHz
Frequency Tolerance	Δf	Includes frequency variations due to initial tolerance, temperature and power supply voltage			±10,±25,±50	ppm
Aging	Δf	1 year @25°C			±5	ppm
Supply Current, standby	I <sub>DD</sub>	T=25°C			15	uA
Output Startup Time <sup>2</sup>	t <sub>SU</sub>	T=25°C		1.0	1.3	ms
Output Disable Time	t <sub>DA</sub>			20	100	ns
Output Duty Cycle	SYM		45		55	%
Input Logic Levels						
Input logic high	V <sub>IH</sub>		0.75*V <sub>DD</sub>		-	Volts
Input logic low	V <sub>IL</sub>		-		0.25* V <sub>DD</sub>	

### Notes:

- Absolute maximum ratings are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated beyond these limits.
- t<sub>SU</sub> is time to stable output frequency after V<sub>DD</sub> is applied. t<sub>SU</sub> and t<sub>EN</sub> (after EN is asserted) are identical values.
- Measured over 50k clock cycles.

**VDD = 1.8v**

Parameter	Symbol	Condition		Min	Typ	Max	Unit
Supply Current, no load	$I_{DD}$	$C_L=0p$ $R_L=\infty$ $T=25^\circ C$	1MHz		5.9	6.2	mA
			27MHz		6.7	7.1	
			70MHz		8.1	8.5	
			150MHz		10.6	11.9	
Output Logic Levels	$V_{OH}$ $V_{OL}$	-6mA 6mA		0.8* $V_{DD}$ -		- 0.2* $V_{DD}$	Volts
Output logic high							
Output logic low							
Output Transition time	$t_R$ $t_F$	$C_L=40pF$ ; $T=25^\circ C$ 20%/80%* $V_{DD}$			1.4 1.1	3 3	ns
Rise Time							
Fall Time							
Output Transition time	$t_R$ $t_F$	$C_L=40pF$ ; $T=25^\circ C$ 10%/90%* $V_{DD}$			2.2 1.8	4 4	ns
Rise Time							
Fall Time							
Period Jitter	$J_p$	F = 100MHz <sup>3</sup>			10	15	ps rms


**VDD = 2.5v**

Parameter	Symbol	Condition		Min	Typ	Max	Unit
Supply Current, no load	$I_{DD}$	$C_L=0p$ $R_L=\infty$ $T=25^\circ C$	1MHz		6.1	6.4	mA
			27MHz		7.2	7.5	
			70MHz		8.9	9.4	
			150MHz		12.2	13.9	
Output Logic Levels	$V_{OH}$ $V_{OL}$	-6mA 6mA		0.9* $V_{DD}$ -		- 0.1* $V_{DD}$	Volts
Output logic high							
Output logic low							
Output Transition time	$t_R$ $t_F$	$C_L=40pF$ ; $T=25^\circ C$ 20%/80%* $V_{DD}$			1.0 0.9	2 2	ns
Rise Time							
Fall Time							
Output Transition time	$t_R$ $t_F$	$C_L=40pF$ ; $T=25^\circ C$ 10%/90%* $V_{DD}$			1.7 1.5	3.5 3	ns
Rise Time							
Fall Time							
Period Jitter	$J_p$	F = 100MHz <sup>3</sup>			5	10	ps rms

**VDD = 3.3v**

Parameter	Symbol	Condition		Min	Typ	Max	Unit
Supply Current, no load	$I_{DD}$	$C_L=0p$ $R_L=\infty$ $T=25^\circ C$	1MHz		6.2	6.5	mA
			27MHz		7.6	8.0	
			70MHz		10.0	10.5	
			150MHz		14.4	16.6	
Output Logic Levels	$V_{OH}$ $V_{OL}$	-8mA 8mA		0.9* $V_{DD}$ -		- 0.1* $V_{DD}$	Volts
Output logic high							
Output logic low							
Output Transition time	$t_R$ $t_F$	$C_L=40pF$ ; $T=25^\circ C$ 20%/80%* $V_{DD}$			0.8 0.8	2 2	ns
Rise Time							
Fall Time							
Output Transition time	$t_R$ $t_F$	$C_L=40pF$ ; $T=25^\circ C$ 10%/90%* $V_{DD}$			1.4 1.3	3 3	ns
Rise Time							
Fall Time							
Period Jitter	$J_p$	F = 100MHz <sup>3</sup>			5	10	ps rms


## Output Waveform

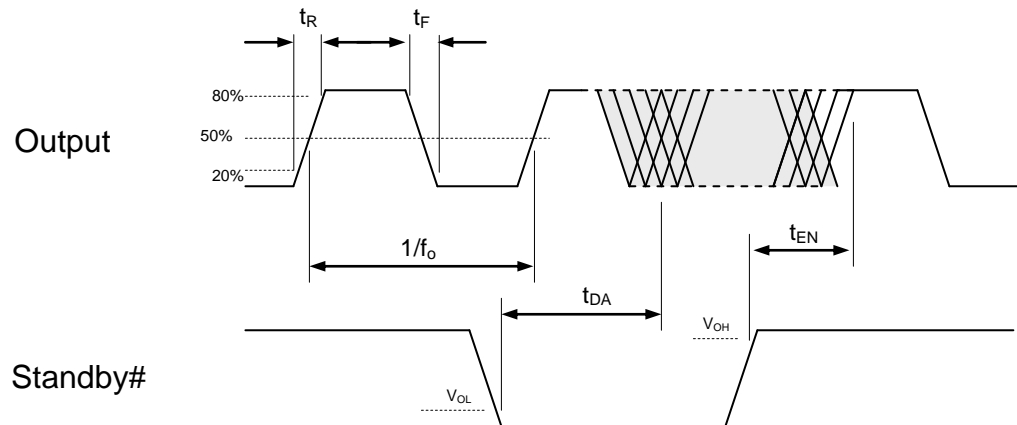


## Standby Function

Standby# (pin 1)	Output (pin 3)
Hi Level	Output ON
Open (no connect)	Output ON
Low Level	High Impedance


## Test Circuit

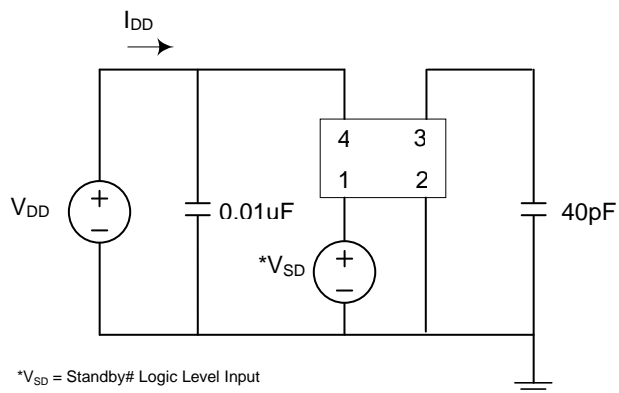

## Board Layout (recommended)

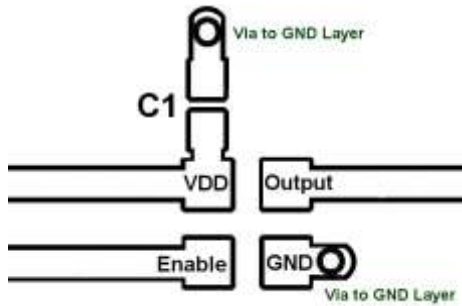

## Solder Reflow Profile

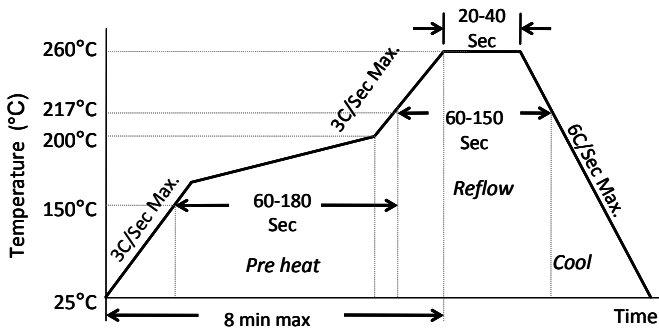

MSL 1 @ 260°C refer to JSTD-020C	
Ramp-Up Rate (200°C to Peak Temp)	3°C/Sec Max.
Preheat Time 150°C to 200°C	60-180 Sec
Time maintained above 217°C	60-150 Sec
Peak Temperature	255-260°C
Time within 5°C of actual Peak	20-40 Sec
Ramp-Down Rate	6°C/Sec Max.
Time 25°C to Peak Temperature	8 min Max.

## Package Dimensions

### 7.0 x 5.0 mm Plastic Package

#### External Dimensions

7.0±0.10 [0.276±0.004]

5.08±0.10 [0.197±0.004]

2.6 [0.102]

3.5 [0.138]

2.2 [0.087]

1.4 [0.055]

0.2 [0.008]

1.2 [0.047]

0.85±0.05 [0.033±0.002]

#### Recommended Land Pattern\*

5.08 [0.200]

2.6 [0.102]

0.2 [0.008]


1.4 [0.055]

No.	Pin Terminal
1	Standby#
2	GND
3	Output
4	VDD


units: mm [inch]

\*Note: The center pad is not connected internally and should be left unconnected or tied to GND.


### 5.0 x 3.2 mm Plastic Package

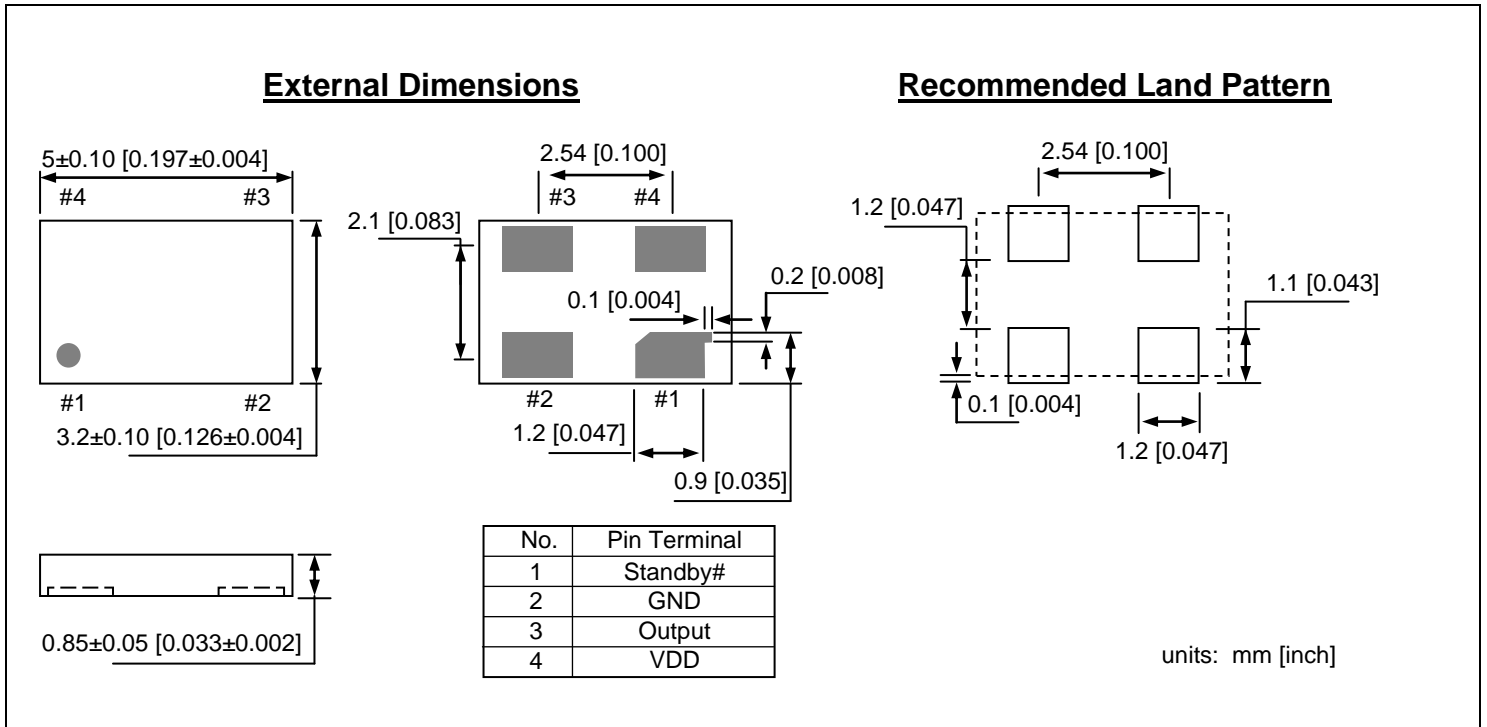

### 3.2 x 2.5 mm Plastic Package

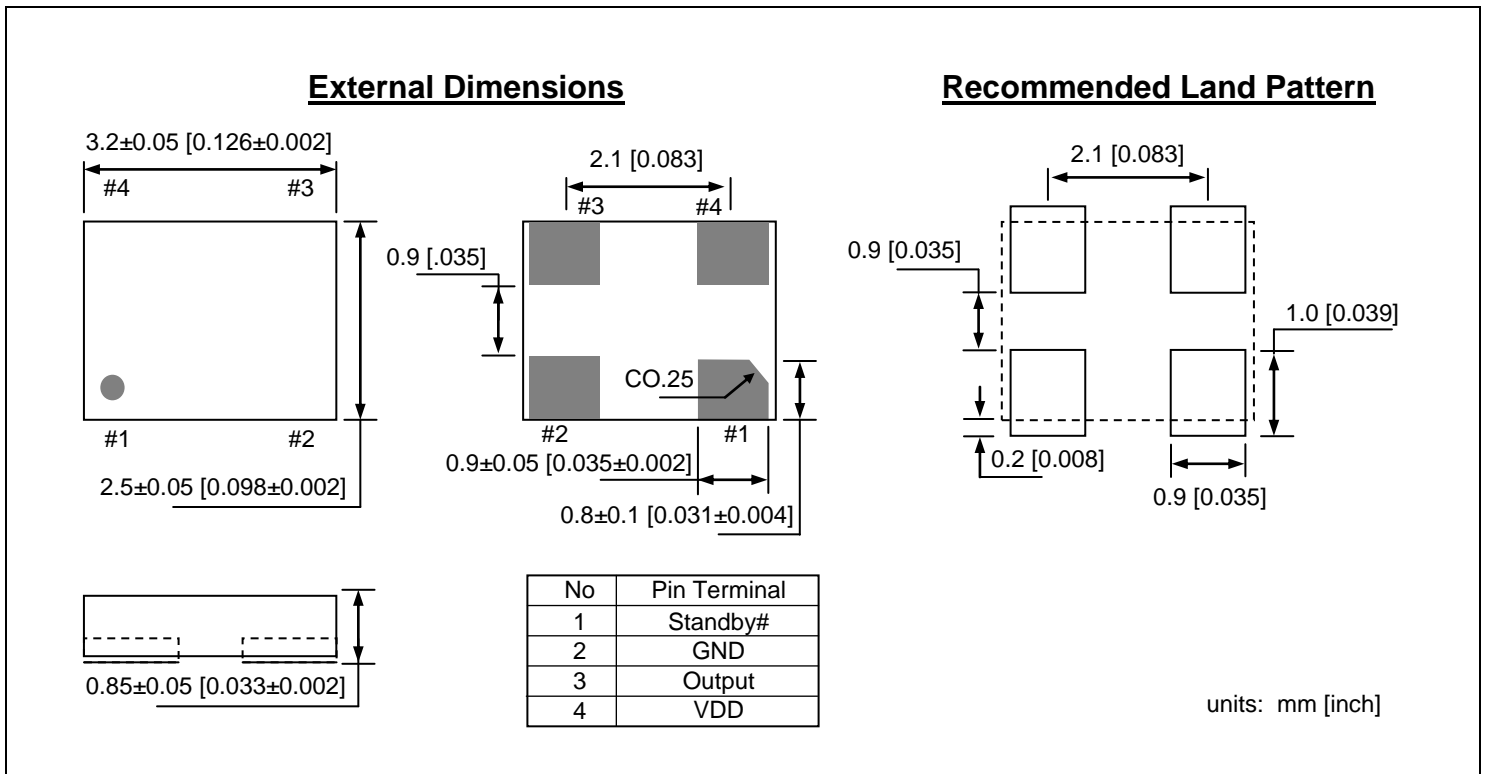

### 2.5 x 2.0 mm Plastic Package

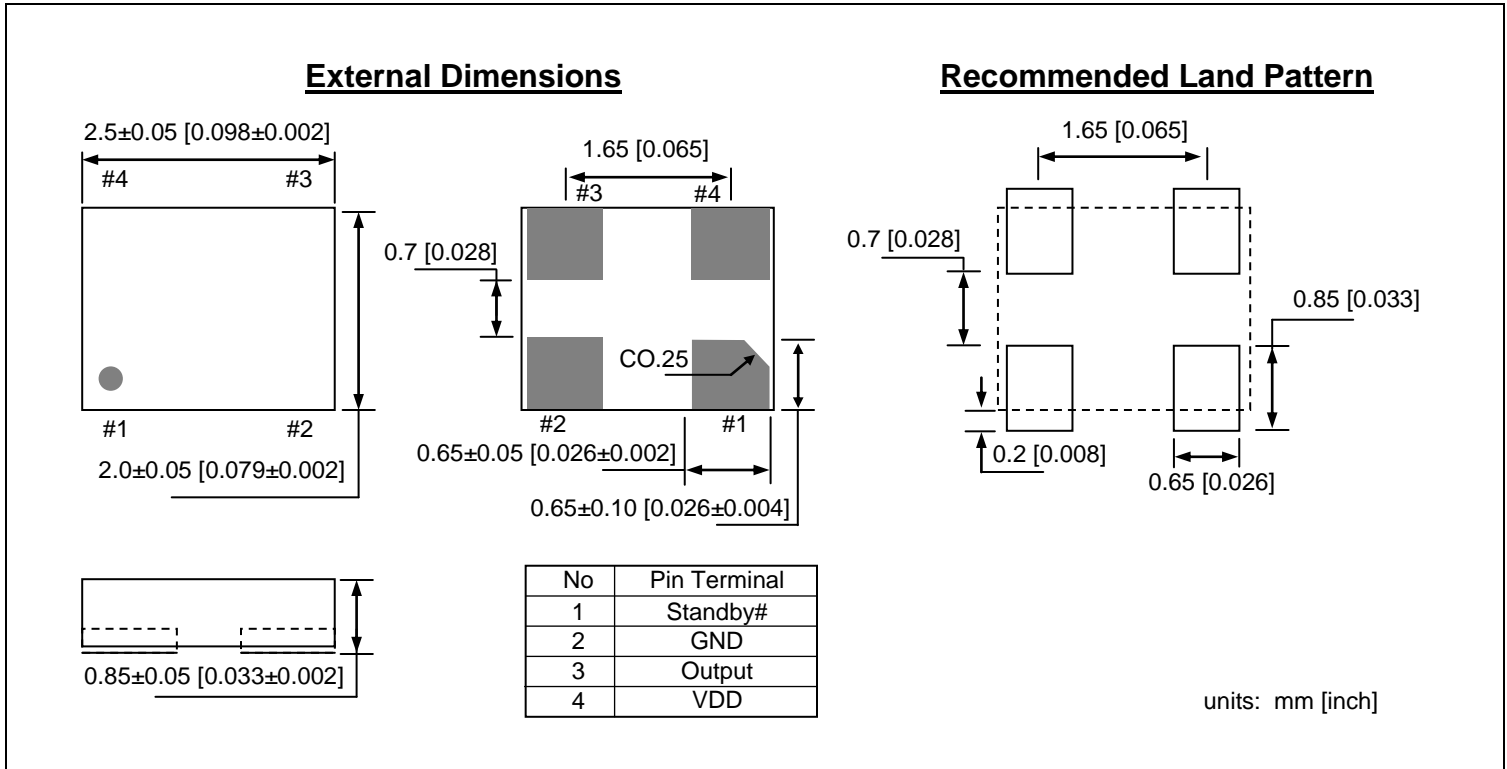

## Ordering Information

### DSC8004 PTS - T

PART NUMBERING GUIDE			
Package (Plastic QFN)	Temperature	Stability	Packing Option
<b>P=A:</b> 7.0x5.0mm <b>P=B:</b> 5.0x3.2mm <b>P=C:</b> 3.2x2.5mm <b>P=D:</b> 2.5x2.0mm	<b>T=E:</b> -20° ~ +70° C <b>T=I:</b> -40° ~ +85° C <b>T=L:</b> -40° ~ +105° C	<b>S=1:</b> ±50ppm <b>S=2:</b> ±25ppm <b>S=3:</b> ±20ppm	<b>Blank:</b> Tubes <b>T:</b> Tape & Reel

#### Disclaimer:

Micrel makes no representations or warranties with respect to the accuracy or completeness of the information furnished in this data sheet. This information is not intended as a warranty and Micrel does not assume responsibility for its use. Micrel reserves the right to change circuitry, specifications and descriptions at any time without notice. No license, whether express, implied, arising by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Micrel's terms and conditions of sale for such products, Micrel assumes no liability whatsoever, and Micrel disclaims any express or implied warranty relating to the sale and/or use of Micrel products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright or other intellectual property right.

**MICREL, Inc.** • **2180 Fortune Drive,** **San Jose, California** **95131** • **USA**  
**Phone: +1 (408) 944-0800** • **Fax: +1 (408) 474-1000** • **Email: hbwhelp@micrel.com** • **[www.micrel.com](http://www.micrel.com)**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Programmable Oscillators](#) category:*

*Click to view products by [Micrel](#) manufacturer:*

Other Similar products are found below :

[8N4Q001LG-0102CDI](#) [8N4Q001LG-0139CDI](#) [8N4Q001LG-0055CDI](#) [DSC8121CI1](#) [DSC8102DI2](#) [DSC8124CI2](#) [DSC8121CL5](#) [ECS-P143-10-AN](#) [SG-8002CA](#) [2.4576M-PCBB](#) [ECS-3525-250-B-TR](#) [DSC6013JI1A-000.0000](#) [DSC6013HI1A-002.5000T](#) [DSC6011JE2A-000.0000](#) [DSC6011HI1A-002.5000T](#) [DSC6083HE1A-032K800T](#) [DSC6001JI1A-000.0000](#) [DSC6001CI1A-011.0592](#) [8008AI-71-18E-98.280000G](#) [SIT8008BI-22-33E-8.000000G](#) [DSC8002CI2](#) [AD2S99APZ](#) [AD2S99BPZ](#) [LTC6903HMS8#PBF](#) [LTC6903IMS8#PBF](#) [LTC6991CDCB#TRMPBF](#) [SG-8018CB](#) [98.304MTJHPA](#) [DS1086LU+C66](#) [DS1090U-2/V+T](#) [DSC2211FL2-E0016](#) [DSC6083CI1A-010K000](#) [DSC6011CI2A-018.0000](#) [DSC6001CI1A-016.9344T](#) [DSC6001CI1A-016.3690T](#) [DSC6001CE2A-025.0000](#) [DSC6001CI1A-016.3690](#) [DSC6051CE2A-003.0720](#) [DSC6083CI1A-350K000](#) [DSC6053CE2A-003.0720](#) [DSC6083CI1A-350K000T](#) [DSC6011CI2A-007.3728T](#) [DSC6011CI1A-013.5600](#) [DSC6083CI1A-425K000](#) [DSC6053CE2A-003.0720T](#) [DSC6051CE2A-003.0720T](#) [DSC6083CI1A-425K000T](#) [DSC6083CI1A-010K000T](#) [DSC6001CI1A-003.6864](#) [DSC6001CI1A-011.2896T](#) [DSC6001CI1A-012.0000](#) [DSC6001CI2A-004.0000T](#)