



# MIC5213

## Teeny™ SC-70 $\mu$ Cap Low-Dropout Regulator

### Final Information

### General Description

The MIC5213 is a  $\mu$ Cap 80mA linear voltage regulator in the Teeny™ SC-70 package. Featuring half the footprint of the standard SOT-23 package, this Teeny™ SC-70 regulator has very low dropout voltage (typically 20mV at light loads and 300mV at 80mA) and very low ground current (225 $\mu$ A at 20mA output). It also offers better than 3% initial accuracy and includes a logic-compatible enable input.

The  $\mu$ Cap regulator design is optimized to work with low-value, low-cost ceramic capacitors. The outputs typically require only 0.47 $\mu$ F of output capacitance for stability.

Designed especially for hand-held, battery-powered devices, the MIC5213 can be controlled by a CMOS or TTL compatible logic signal. When disabled, power consumption drops nearly to zero. If on-off control is not required, the enable pin may be tied to the input for 3-terminal operation. The ground current of the MIC5213 increases only slightly in dropout, further prolonging battery life. Key MIC5213 features include current limiting, overtemperature shutdown, and protection against reversed battery.

The MIC5213 is available in 2.5V, 2.6V, 2.7V, 2.8V, 3.0V, 3.3V, 3.6V, and 5.0V fixed voltages. Other voltages are available; contact Micrel for details.

### Features

- Teeny™ SC-70 package
- Wide selection of output voltages
- Guaranteed 80mA output
- Low quiescent current
- Low dropout voltage
- Tight load and line regulation
- Low temperature coefficient
- Current and thermal limiting
- Reversed input polarity protection
- Zero off-mode current
- Logic-controlled shutdown
- Stability with low ESR ceramic capacitors

### Applications


- Cellular telephones
- Laptop, notebook, and palmtop computers
- Battery-powered equipment
- Bar code scanners
- SMPS post-regulator/dc-to-dc modules
- High-efficiency linear power supplies

### Ordering Information

Part Number		Marking		Voltage	Junction Temp. Range	Package
Standard	Pb-Free	Standard	Pb-Free			
MIC5213-2.5BC5	MIC5213-2.5YC5	LAM	<u>LAM</u>	2.5V	-40°C to +125°C	SC-70-5
MIC5213-2.6BC5	MIC5213-2.6YC5	LAQ	<u>LAQ</u>	2.6V	-40°C to +125°C	SC-70-5
MIC5213-2.7BC5	MIC5213-2.7YC5	LAL	<u>LAL</u>	2.7V	-40°C to +125°C	SC-70-5
MIC5213-2.8BC5	MIC5213-2.8YC5	LAJ	<u>LAJ</u>	2.8V	-40°C to +125°C	SC-70-5
MIC5213-3.0BC5	MIC5213-3.0YC5	LAG	<u>LAG</u>	3.0V	-40°C to +125°C	SC-70-5
MIC5213-3.3BC5	MIC5213-3.3YC5	LAE	<u>LAE</u>	3.3V	-40°C to +125°C	SC-70-5
MIC5213-3.6BC5	MIC5213-3.6YC5	LAD	<u>LAD</u>	3.6V	-40°C to +125°C	SC-70-5
MIC5213-5.0BC5	MIC5213-5.0YC5	LAB	<u>LAB</u>	5.0V	-40°C to +125°C	SC-70-5

Other voltages available. Contact Micrel for details.

### Typical Applications

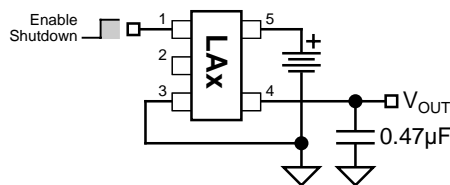


Regulator Circuit

Teeny is a trademark of Micrel, Inc.

Micrel, Inc. • 1849 Fortune Drive • San Jose, CA 95131 • USA • tel + 1 (408) 944-0800 • fax + 1 (408) 474-1000 • <http://www.micrel.com>

## Pin Configuration



**SC-70-5 (C5)**

## Pin Description

Pin Number	Pin Name	Pin Function
1	EN	Enable (Input): TTL/CMOS compatible control input. Logic high = enabled; logic low or open = shutdown.
2	NC	Not internally connected.
3	GND	Ground
4	OUT	Regulator Output
5	IN	Supply Input

### Absolute Maximum Ratings (Note 1)

Input Supply Voltage ( $V_{IN}$ ) ..... -20V to +20V  
 Enable Input Voltage ( $V_{EN}$ ) ..... -20V to +20V  
 Power Dissipation ( $P_D$ ) ..... Internally Limited  
 Storage Temperature Range ( $T_S$ ) ..... -60°C to +150°C  
 Lead Temperature (Soldering, 5 sec.) ..... 260°C  
 ESD, **Note 3**

### Operating Ratings (Note 2)

Input Voltage ( $V_{IN}$ ) ..... 2.5V to 16V  
 Enable Input Voltage ( $V_{EN}$ ) ..... 0V to  $V_{IN}$   
 Junction Temperature Range ..... -40°C to +125°C  
 Thermal Resistance ( $\theta_{JA}$ ) ..... **Note 4**

## Electrical Characteristics

$V_{IN} = V_{OUT} + 1V$ ;  $I_L = 1mA$ ;  $C_L = 0.47\mu F$ ;  $V_{EN} \geq 2.0V$ ;  $T_J = 25^\circ C$ , **bold** values indicate  $-40^\circ C \leq T_J \leq +125^\circ C$ ; unless noted.

Symbol	Parameter	Conditions	Min	Typ	Max	Units
$V_O$	Output Voltage Accuracy		-3		3	%
			-4		<b>4</b>	%
$\Delta V_O/\Delta T$	Output Voltage Temp. Coefficient	<b>Note 5</b>		<b>50</b>	<b>200</b>	ppm/ $^\circ C$
$\Delta V_O/V_O$	Line Regulation	$V_{IN} = V_{OUT} + 1V$ to 16V		0.008	0.3 <b>0.5</b>	% %
$\Delta V_O/V_O$	Load Regulation	$I_L = 0.1mA$ to 80mA, <b>Note 6</b>		0.08	0.3 <b>0.5</b>	% %
$V_{IN}-V_O$	Dropout Voltage, <b>Note 7</b>	$I_L = 100\mu A$		20		mV
		$I_L = 20mA$		200	<b>350</b>	mV
		$I_L = 50mA$		250		mV
		$I_L = 80mA$		280	<b>600</b>	mV
$I_Q$	Quiescent Current	$V_{EN} \leq 0.4V$ (shutdown)		0.01	10	$\mu A$
$I_{GND}$	Ground Pin Current, <b>Note 8</b>	$I_L = 100\mu A$ , $V_{EN} \geq 2.0V$ (active)		180		$\mu A$
		$I_L = 20mA$ , $V_{EN} \geq 2.0V$ (active)		225	<b>750</b>	$\mu A$
		$I_L = 50mA$ , $V_{EN} \geq 2.0V$ (active)		850		$\mu A$
		$I_L = 80mA$ , $V_{EN} \geq 2.0V$ (active)		1800	<b>3000</b>	$\mu A$
$I_{GNDDO}$	Ground Pin Current in Dropout	$V_{IN} = V_{OUT(nominal)} - 0.5V$ , <b>Note 8</b>		200	<b>300</b>	$\mu A$
$I_{LIMIT}$	Current Limit	$V_{OUT} = 0V$		180	<b>250</b>	mA
$\Delta V_O/\Delta P_D$	Thermal Regulation	<b>Note 9</b>		0.05		%/W

### Enable Input

$V_{IL}$	Enable Input Voltage Level	Logic Low (off)			<b>0.6</b>	V
		Logic High (on)	<b>2.0</b>			V
$I_{IL}$	Enable Input Current	$V_{IL} \leq 0.6V$		0.01	1	$\mu A$
		$V_{IH} \geq 2.0V$		8	<b>50</b>	$\mu A$

**Note 1.** Exceeding the absolute maximum rating may damage the device.

**Note 2.** The device is not guaranteed to function outside its operating rating.

**Note 3.** Devices are ESD sensitive. Handling precautions recommended.

**Note 4.** The maximum allowable power dissipation is a function of the maximum junction temperature,  $T_{J(max)}$ , the junction-to-ambient thermal resistance,  $\theta_{JA}$ , and the ambient temperature,  $T_A$ . The maximum allowable power dissipation at any ambient temperature is calculated using:  $P_{D(max)} = (T_{J(max)} - T_A) \div \theta_{JA}$ . Exceeding the maximum allowable power dissipation will result in excessive die temperature, and the regulator will go into thermal shutdown.  $\theta_{JA}$  of the SC-70-5 is 450 $^\circ C/W$ , mounted on a PC board.

**Note 5.** Output voltage temperature coefficient is defined as the worst case voltage change divided by the total temperature range.













**Note 6.** Regulation is measured at constant junction temperature using low duty cycle pulse testing. Changes in output voltage due to heating effects are covered by the thermal regulation specification.








**Note 7.** Dropout voltage is defined as the input to output differential at which the output voltage drops 2% below its nominal value measured at 1V differential.






**Note 8.** Ground pin current is the regulator quiescent current plus pass transistor base current. The total current drawn from the supply is the sum of the load current plus the ground pin current.

**Note 9.** Thermal regulation is defined as the change in output voltage at a time "t" after a change in power dissipation is applied, excluding load or line regulation effects. Specifications are for an 80mA load pulse at  $V_{IN} = 16V$  for  $t = 10ms$ .

# Typical Characteristics

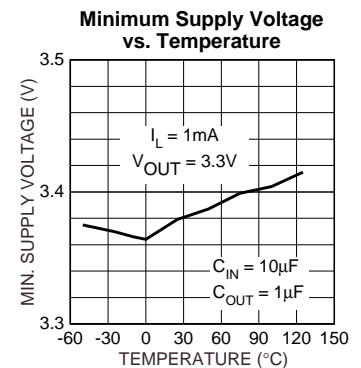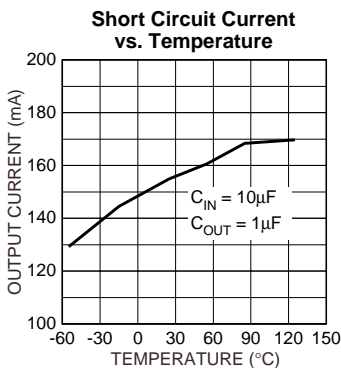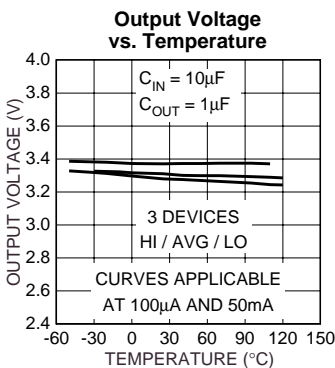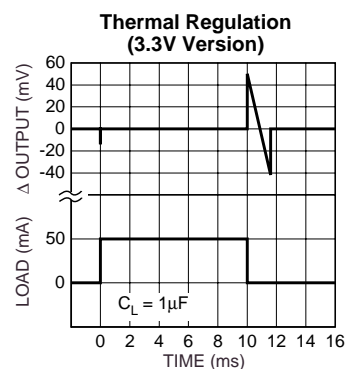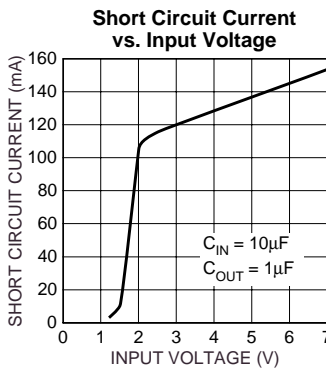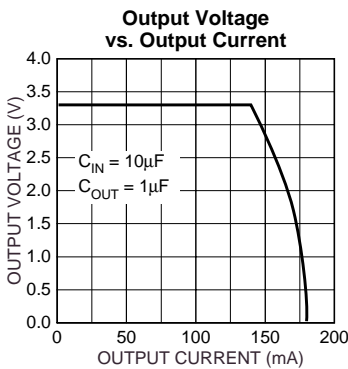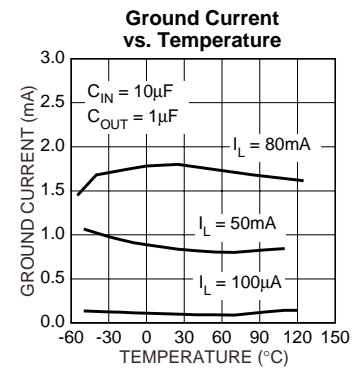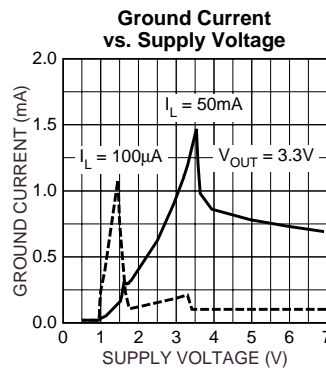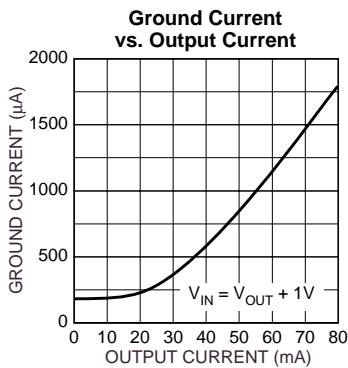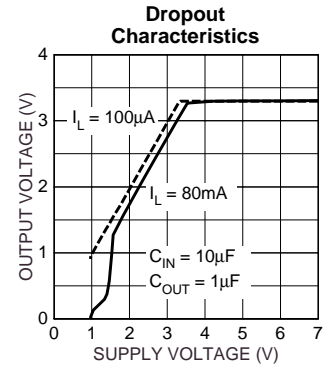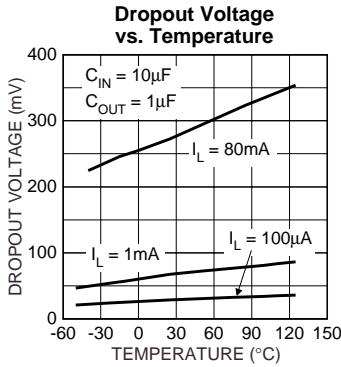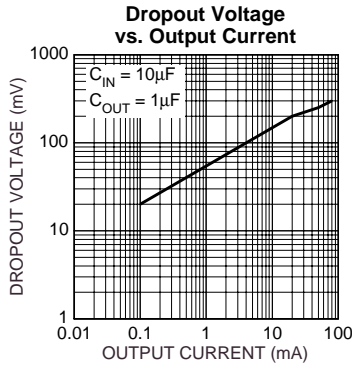

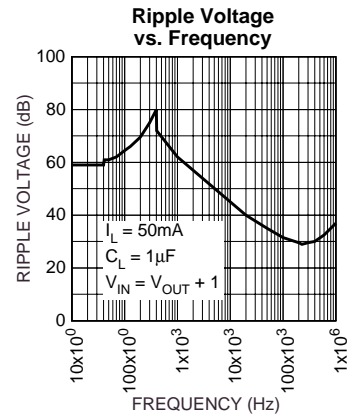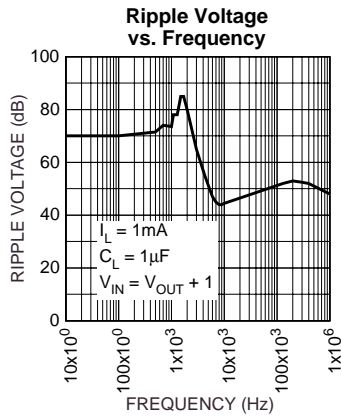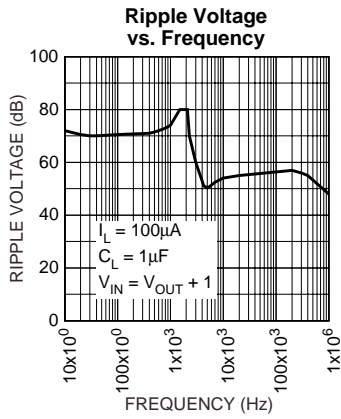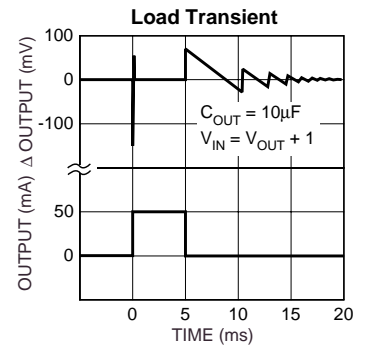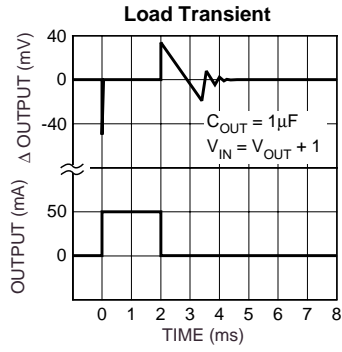

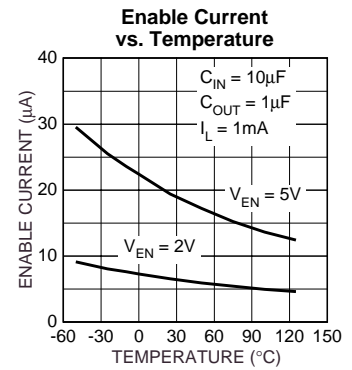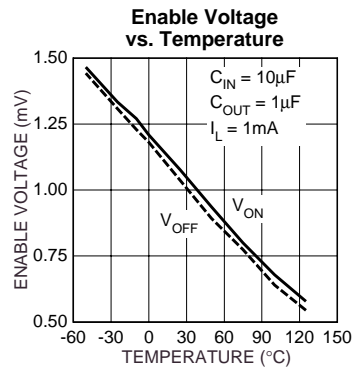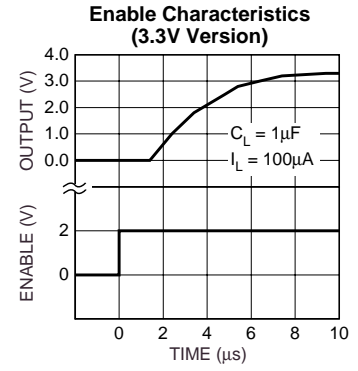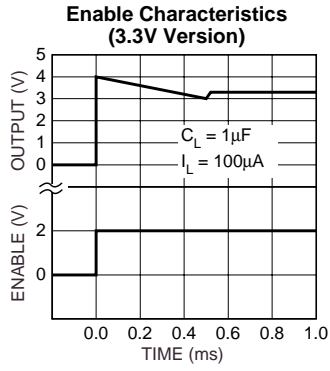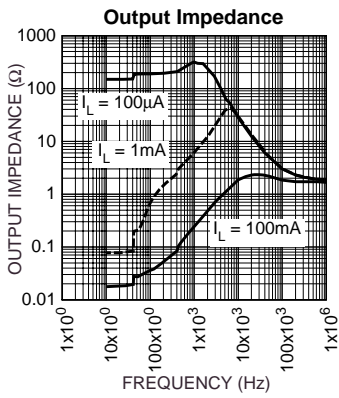

## Applications Information

### Input Capacitor

A 0.1 $\mu$ F capacitor should be placed from IN to GND if there is more than 10 inches of wire between the input and the ac filter capacitor or when a battery is used as the input.

### Output Capacitor

Typical PNP-based regulators require an output capacitor to prevent oscillation. The MIC5213 is ultrastable, requiring only 0.47 $\mu$ F of output capacitance for stability. The regulator is stable with all types of capacitors, including the tiny, low-ESR ceramic chip capacitors. The output capacitor value can be increased without limit to improve transient response.

### No-Load Stability

The MIC5213 will remain stable and in regulation with no load (other than the internal voltage divider) unlike many other voltage regulators. This is especially important in CMOS RAM keep-alive applications.

### Enable Input

The MIC5213 features nearly zero off-mode current. When EN (enable input) is held below 0.6V, all internal circuitry is powered off. Pulling EN high (over 2.0V) re-enables the device and allows operation. When EN is held low, the regulator typically draws only 10nA of current. While the logic threshold is TTL/CMOS compatible, EN may be pulled as high as 20V, independent of  $V_{IN}$ .

### Thermal Behavior

The MIC5213 is designed to provide 80mA of continuous current in a very small profile package. Maximum power dissipation can be calculated based on the output current and the voltage drop across the part. To determine the maximum power dissipation of the package, use the junction-to-ambient thermal resistance of the device and the following basic equation:

$$P_{D(max)} = \frac{T_{J(max)} - T_A}{\theta_{JA}}$$

$T_{J(max)}$  is the maximum junction temperature of the die, 125°C, and  $T_A$  is the maximum ambient temperature.  $\theta_{JA}$  is the junction-to-ambient thermal resistance ambient of the regulator. The  $\theta_{JA}$  of the MIC5213 is 450°C/W.

The actual power dissipation of the regulator circuit can be determined using one simple equation.

$$P_D = (V_{IN} - V_{OUT}) I_{OUT} + V_{IN} \times I_{GND}$$

Substituting  $P_{D(max)}$ , determined above, for  $P_D$  and solving for the operating conditions that are critical to the application will give the maximum operating conditions for the regulator circuit. For example, if we are operating the MIC5213-3.0BC5 at room temperature, with a minimum footprint layout, we can determine the maximum input voltage for a set output current.

$$P_{D(max)} = \frac{125 - 25}{450^\circ\text{C} / \text{W}}$$

$$P_{D(max)} = 222\text{mW}$$

To prevent the device from entering thermal shutdown, maximum power dissipation cannot be exceeded. Using the output voltage of 3.0V, and an output current of 80mA, we can determine the maximum input voltage. Ground current, maximum of 3mA for 80mA of output current, can be taken from the "Electrical Characteristics" section of the data sheet.

$$222\text{mW} = (V_{IN} - 3.0\text{V}) 80\text{mA} + V_{IN} \times 3\text{mA}$$

$$222\text{mW} = (80\text{mA} \times V_{IN} + 3\text{mA} \times V_{IN}) - 240\text{mW}$$

$$462\text{mW} = 83\text{mA} \times V_{IN}$$

$$V_{IN} = 5.57\text{V max.}$$

Therefore, a 3.0V application at 80mA of output current can accept a maximum input voltage of 5.6V in an SC-70-5 package. For a full discussion of heat sinking and thermal effects on voltage regulators, refer to Regulator Thermals section of Micrel's *Designing with Low-Dropout Voltage Regulators* handbook.

### Fixed Voltage Regulator

The MIC5213 is ideal for general-purpose voltage regulation in any handheld device. Applications that are tight for space can easily use the Teeny™ SC-70 regulator which occupies half the space of a SOT-23-5 regulator. The MIC5203 offers a smaller system solution, only requiring a small multilayer ceramic capacitor for stability.




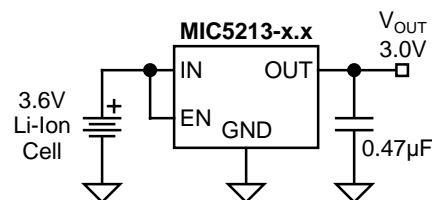


Figure 1. Single-Cell Regulator

**Package Information**

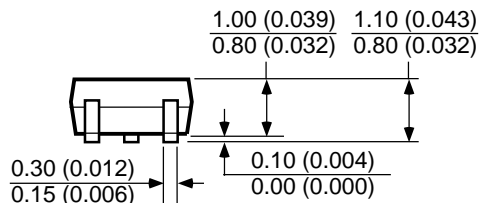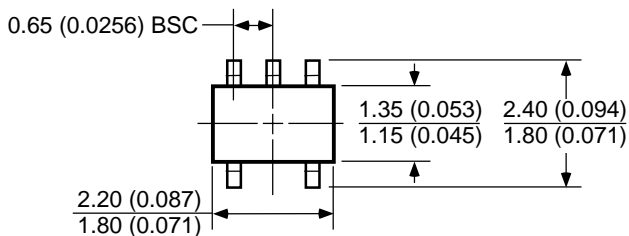

DIMENSIONS:  
MM (INCH)



**SC-70-5 (C5)**

**MICREL, INC. 1849 FORTUNE DRIVE SAN JOSE, CA 95131 USA**

TEL + 1 (408) 944-0800 FAX + 1 (408) 474-1000 WEB <http://www.micrel.com>

This information is believed to be accurate and reliable, however no responsibility is assumed by Micrel for its use nor for any infringement of patents or other rights of third parties resulting from its use. No license is granted by implication or otherwise under any patent or patent right of Micrel, Inc.

© 2004 Micrel, Incorporated



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LDO Voltage Regulators](#) category:*

*Click to view products by [Micrel](#) manufacturer:*

Other Similar products are found below :

[AP7363-SP-13](#) [L79M05TL-E](#) [PT7M8202B12TA5EX](#) [TCR3DF185,LM\(CT](#) [TCR3DF24,LM\(CT](#) [TCR3DF285,LM\(CT](#) [TCR3DF31,LM\(CT](#)  
[TCR3DF45,LM\(CT](#) [MP2013GQ-33-Z](#) [059985X](#) [NCP4687DH15T1G](#) [701326R](#) [TCR2EN28,LF\(S](#) [NCV8170AXV250T2G](#)  
[TCR3DF27,LM\(CT](#) [TCR3DF19,LM\(CT](#) [TCR3DF125,LM\(CT](#) [TCR2EN18,LF\(S](#) [AP7315-25W5-7](#) [IFX30081LDVGRNXUMA1](#)  
[NCV47411PAAJR2G](#) [AP2113KTR-G1](#) [AP2111H-1.2TRG1](#) [ZLDO1117QK50TC](#) [AZ1117IH-1.8TRG1](#) [TCR3DG12,LF](#) [MIC5514-3.3YMT-](#)  
[T5](#) [MIC5512-1.2YMT-T5](#) [MIC5317-2.8YM5-T5](#) [SCD7912BTG](#) [NCP154MX180270TAG](#) [SCD33269T-5.0G](#) [NCV8170BMX330TCG](#)  
[NCV8170AMX120TCG](#) [NCP706ABMX300TAG](#) [NCP153MX330180TCG](#) [NCP114BMX075TCG](#) [MC33269T-3.5G](#) [CAT6243-ADJCMT5T](#)  
[TCR3DG33,LF](#) [AP2127N-1.0TRG1](#) [TCR4DG35,LF](#) [LT1117CST-3.3](#) [LT1117CST-5](#) [TAR5S15U\(TE85L,F\)](#) [TAR5S18U\(TE85L,F\)](#)  
[TCR3UG19A,LF](#) [TCR4DG105,LF](#) [NCV8170AMX360TCG](#) [MIC94310-NYMT-T5](#)