




STK600-RC064SAM-72

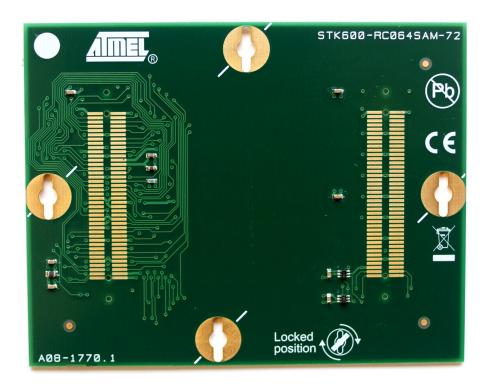

Description

The Atmel® STK®600-RC064SAM-72 (STK600-RC72) is a routing card to support the 64-pin version of the Atmel SAM D20 ARM® CortexTM-M0+ based microcontroller on STK600. The STK600 does not support programming of the SAM D20. However, it does work as a breakout board for IO-pins and programming interface, as well as being able to power the device and provide clock signals.

Table of Contents

De	Description				
1.	Getti	ng Started	3		
	1.2.	Card Stack Board Settings Connections	3		
2.	Docu	ument Revision History	5		



1. Getting Started

1.1 Card Stack

The STK600-RC064SAM-72 must be used together with an STK600. In addition a socket board is required. Depending on the package type of the device, either of STK600-TQFP64-2 and STK600-QFN64 can be used. See the STK600 User Guide for instructions on assembling the card stack.

Once the card stack is assembled, the STK600 can be powered. The status LED should be steady green. If it is blinking orange, it might be necessary to let Atmel Studio update the card stack information on the STK600. This is done automatically when connecting to STK600 in the programming dialog.

1.2 Board Settings

The programming dialog of Atmel Studio is used to set the voltages and clock frequency. Since programming of the SAM D20 is not supported by STK600, it will not show in the device list. Therefore, when connecting to STK600 in the programming dialog, it is necessary to select a different device than SAM D20. Any device and interface (e.g. AT32UC3A0128 and JTAG) from the lists will work for setting the voltage and clock. After connecting, go to board settings to access the voltage and clock settings. Move the sliders and click "Write" to change the values. Note that all voltages are limited to 3.6V.

9 X STK600 (0045E5507FD0) - Device Programming Tool Device signature Target Voltage Device Interface STK600 - AT32UC3A0128 ▼ JTAG ▼ Apply Read 3,3 V Read Ü Interface settings VTarget ARef0 ARef1 Clock generator Tool information Board settings Card stack Device information Memories Fuses Security 0.00 V 12 MHz 3.3 V 0.00 V Generated Measured 0,00 V 0.00 V Read Write Close

Figure 1-1. Board settings

1.3 Connections

The SWD interface of the SAM D20 is routed to the 10-pin JTAG connector and the 6-pin ISP connector of the STK600. The pinout is shown in the figure below, in addition to the pinout for the SAM-ICETM.



Figure 1-2. Tool Pinout

1	2
VTREF	NC
3	4
NC	Gnd
5	6
NC	Gnd
7	8
SWDIO	Gnd
9	10
SWCLK	Gnd
11	12
NC	Gnd
13	14
SWO	Gnd
15	16
RESET	Gnd
17	18
NC	Gnd
19	20
NC	Gnd

1	2
SWDIO	VCC
3	4
SWCLK	NC
5	6
RESET	Gnd


STK600 ISP

1	2
SWCLK	Gnd
3	4
NC	VCC
5	6
	100
SWDIO	RESET
SWDIO 7	RESET 8
7	8

SAM-ICE STK600 JTAG

It is necessary to use single wires to connect the SAM-ICE to the STK600 headers. The picture below is a reference for making the connections.

Figure 1-3. Connecting SAM-ICE over SWD

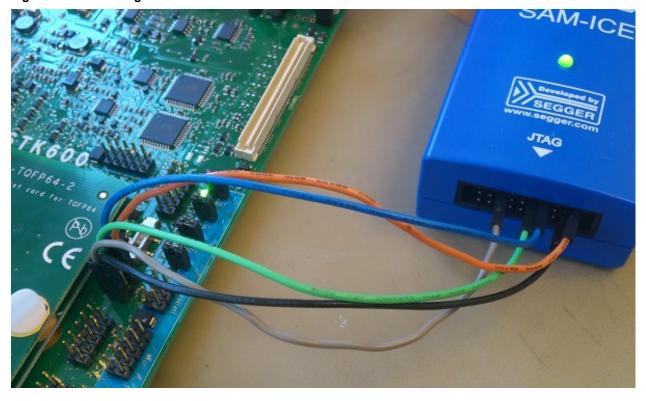



2. Document Revision History

Doc. Rev.	Date	Comment
Α	06/2013	First release





 Atmel Corporation
 1600 Technology Drive, San Jose, CA 95110 USA
 T: (+1)(408) 441.0311
 F: (+1)(408) 436.4200
 | www.atmel.com

© 2013 Atmel Corporation. All rights reserved. / Rev.: 42148A-MCU-06/2013

Atmel®, Atmel logo and combinations thereof, Enabling Unlimited Possibilities®, and others are registered trademarks or trademarks of Atmel Corporation or its subsidiaries. ARM® and Cortex® are registered trademarks of ARM Ltd. Other terms and product names may be trademarks of others.

Disclaimer: The information in this document is provided in connection with Atmel products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of Atmel products. EXCEPT AS SET FORTH IN THE ATMEL TERMS AND CONDITIONS OF SALES LOCATED ON THE ATMEL WEBSITE, ATMEL ASSUMES NO LIABILITY WHATSOEVER AND DISCLAIMS ANY EXPRESS, IMPLIED OR STATUTORY WARRANTY RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT SHALL ATMEL BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE, SPECIAL OR INCIDENTAL DAMAGES (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS AND PROFITS, BUSINESS INTERRUPTION, OR LOSS OF INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THIS DOCUMENT, EVEN IF ATMEL HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. Atmel makes no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and products descriptions at any time without notice. Atmel products are not suitable for, and shall not be used in, automotive applications. Atmel products are not intended, authorized, or warranted for use as components in applications intended to support or sustain life.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Sockets & Adapters category:

Click to view products by Microchip manufacturer:

Other Similar products are found below:

6508-0-00-01-00-00-33-0 AC164341 AC164348 1262 22827 AC164353 TDGL015 SA247 SM64TQ-ACTEL-1 70-0036 DS91230+

SMPA-ISP-ACTEL-3-KIT 16017 KIT 70601-3 SM132CQ-ACTEL IPC0181 IPC0175 IPC0165 AC164397 conga-Thin MITX/eDP to DP

Adapter ML-ADP-EVN ASA.01 ASA.09 ASA.12 ASA.14 TOOLSTICK990MPP MIKROE-425 C305000ACP2 110-83-320-41-605101

110-83-632-41-605101 110-83-640-41-605101 110-83-628-41-605101 116-83-306-41-001101 PA0003 PA0007 PA0009 PA0035 PA0085

PA0096 IPC0079 ATARD-DBGADPT 80-000286 ATSTK600-RC88 ATSTK600-SC06 ATSTK600-RC78 SPC560PADPT64S AC164345

AC164342 14-351000-11-RC 966927-1