



Miniature 10 Amps • 4PDT To MIL-PRF-83536

SPECIFICATIONS

GENERAL Contact Arrangement4PDT (4 Form C)
Weight
PERFORMANCE
Contact Rating (Note 1)
Resistive
Inductive8 Amps @ @ 28 VDC or 115/208V 400 Hz (Case Grounded)
2.5 Amps @ 115/208V 60 Hz
(Case Grounded) Motor4 Amps @ 28 VDC or 115/208V 400 Hz
(Case Grounded) 2 Amps @ 115/208V 60 Hz (Case Grounded)
Lamp2 Amps @ 28 VDC or 115/208V 400 Hz (Case Grounded)
1.5 Amps @ 115/208V 60 Hz (Case Grounded)
Life
resistive load, 125°C Pull In Power 500 mw approx.

Operate/Release Time:	DC Coil 15 ms max	AC Coil
Excluding bounce time at		
Contact Bounce Time	@ rated contact lo	
Contact Voltage Drop:		
Before Life	150 mv max (@ 10 Amps and 6 VDC
After Life	175 mv max (@ 10 Amps
510 (ID 010 451) T41		and 6 VDC
ENVIRONMENTAL		
Temperature Range Vibration (Note 2)		10 - 70 Hz
Shock (Operating)(Note 2)		
ELECTRICAL CHARAC	TERISTICS	
Duty CycleInsulation Resistance	100	
Dielectric Strength: Sea Level:		
Contact to Case		•
Contact to Coil		
Coil to CaseAcross Open Contacts		
80,000 Feet: All Points		.350 VRMS

MIL-PRF-83536/15 QUALIFIED to ER level M

Notes


- 1. For other ratings consult the factory.
- 2. For applications requiring higher shock and vibration, consult the factory.

3. AC coil line frequency 50 to 400 Hz.




COIL DATA


MODEL BR230 PART NUMBER	BR230-20()()-6V	BR230-78()()-12V	BR230-290()()-28V	BR230-890()()-48V	BR230AC-()()-115V (Note 3)
NOMINAL COIL VOLTAGE	6 VDC	12 VDC	28 VDC	48 VDC	115 VAC
MAXIMUM COIL VOLTAGE	8 VDC	15 VDC	29 VDC	59 VDC	122 VAC
PULL IN VOLTAGE (MAX @ +125°C)	4.5 VDC	9 VDC	18 VDC	36 VDC	90 VAC
DROP OUT VOLTAGE (MAX)	1.8 VDC	3.5 VDC	5.1 VDC	11 VDC	5 - 30 VAC
COIL RESISTANCE ± 10% @ 25°C	20 OHMS	78 OHMS	290 OHMS	890 OHMS	I = 0.04 AMPS




SCHEMATIC TERMINAL VIEWS

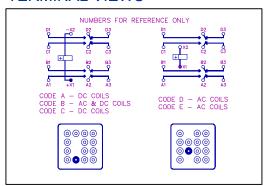



TERMINAL STYLES

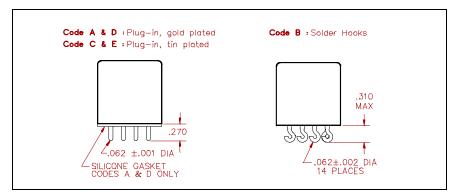

MOUNTING CODES

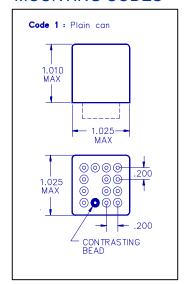

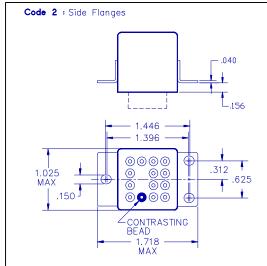

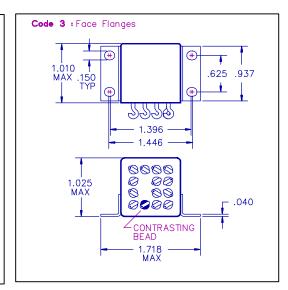

GENERAL NOTES

- Unless otherwise specified, all tests made at nominal coil voltages, @ 25°C.
- For special coil variations, switching configurations, terminals styles and mounting types, consult the factory.
- Unless otherwise specified, tolerances on decimal dimensions are \pm .010".
- Specifications contained herein are subject to change without notice.



Microsemi Corporate Headquarters One Enterprise, Aliso Viejo, CA 92656 USA

Within the USA: +1 (800) 713-4113 Outside the USA: +1 (949) 380-6100 Sales: +1 (949) 380-6136 Fax: +1 (949) 215-4996

E-mail: sales.support@microsemi.com

© 2015 Microsemi Corporation. All rights reserved. Microsemi and the Microsemi logo are trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.

Microsemi Corporation (Nasdaq: MSCC) offers a comprehensive portfolio of semiconductor and system solutions for communications, defense & security, aerospace and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; security technologies and scalable anti-tamper products; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Microsemi is headquartered in Aliso Viejo, Calif., and has approximately 3,400 employees globally. Learn more at www.microsemi.com.

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or circuit. The products sold hereunder and any other products sold by Microsemi have been subject to limited testing and should not be used in conjunction with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not verified, and Buyer must conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with the Buyer. Microsemi does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information. Information provided in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to the information in this document or to any products and services at any time without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for General Purpose Relays category:

Click to view products by Microchip manufacturer:

Other Similar products are found below:

PCN-105D3MH,000 59641F200 LY1SAC110120 5X827E 5X837F 5X840F 5X842F 5X848E LY2N-AC120 LY2S-AC220/240 LY2-US-AC120 LY3-US-AC120 LY4F-UA-DC12 LY4F-UA-DC24 LY4F-US-AC120 LY4F-US-AC240 LY4F-US-DC24 LY4F-VD-AC110 LYQ20DC12 M115C60 M115N010 M115N0150 6031007G 603-12D 61211T0B4 61212T400 61222Q400 61243B600 61243C500 61243Q400 61311BOA2 61311BOA6 61311BOA8 61311COA2 61311COA1 61311COA6 61311F0A2 61311QOA1 61311QOA4 61311T0B6 61311TOA6 61311TOA6 61311TOB3 61311TOB4 61311U0A6 61312Q600 61312T400 61312T600 61313U200 61313U400