



## MIC5307

### 300mA Micropower $\mu$ Cap Baseband LDO

## General Description

The MIC5307 is a micropower,  $\mu$ Cap low dropout regulator designed for optimal performance where smaller packages are required. It is capable of sourcing 300mA of output current while only drawing 20 $\mu$ A of operating current. This high performance LDO offers fast transient response and good PSRR while consuming a minimum of current.

Ideal for battery operated applications; the MIC5307 offers 1% initial accuracy, extremely low dropout voltage and is equipped with a TTL logic compatible enable pin. The MIC5307 can be put into a zero-off-mode current state, drawing no current when disabled.

The MIC5307 is a  $\mu$ Cap design, operating with very small ceramic output capacitors for stability, reducing required board space and component cost.

The MIC5307 is available in fixed output voltages in the Thin SOT23-5 package and the 6-pin 2mm x 2mm Thin MLF<sup>®</sup> package.

Data sheets and support documentation can be found on Micrel's web site at [www.micrel.com](http://www.micrel.com).



## Features

- Input voltage range: 2.4V to 5.5V
- Ultra-low IQ: Only 20 $\mu$ A operating current
- Stable with ceramic output capacitor
- Low dropout voltage of 120mV @ 300mA
- High output accuracy
  - $\pm 1.0\%$  initial accuracy
  - $\pm 2.0\%$  over temperature
- Thermal Shutdown Protection
- Current Limit Protection

## Applications

- Digital Logic Power Supply
- Stand-by power supply
- Cellular phones
- PDAs
- Portable electronics
- Notebook PCs


## Typical Application

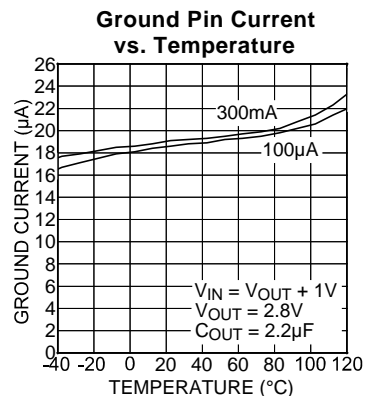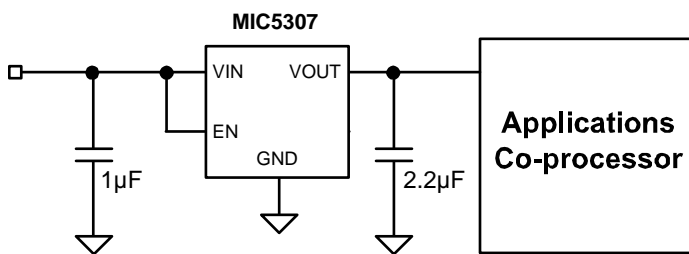

MLF and MicroLeadFrame are registered trademarks of Amkor Technology, Inc.

Micrel Inc. • 2180 Fortune Drive • San Jose, CA 95131 • USA • tel +1 (408) 944-0800 • fax + 1 (408) 474-1000 • <http://www.micrel.com>

### Block Diagram

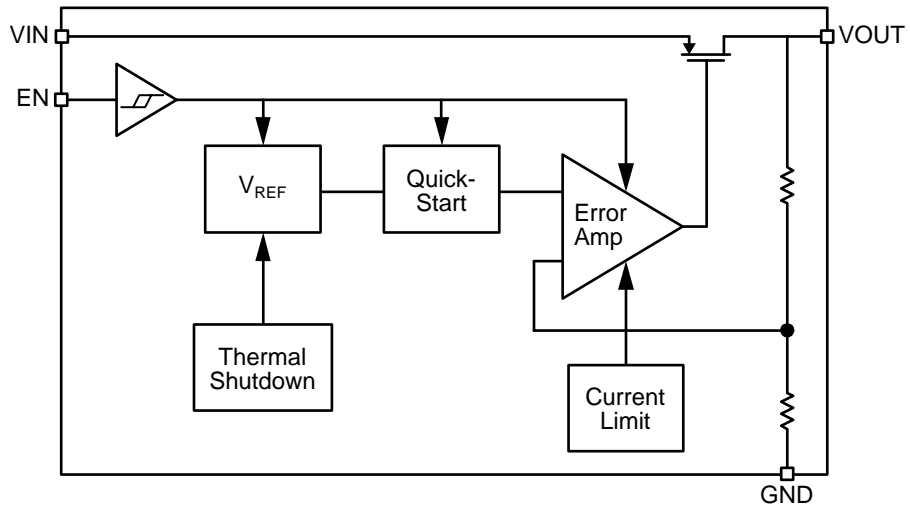

## Ordering Information<sup>(1)</sup>


| Part Number    | Marking Code | Voltage | Temperature Range | Package                               | Lead Finish |
|----------------|--------------|---------|-------------------|---------------------------------------|-------------|
| MIC5307-1.5YD5 | QQ15*        | 1.5V    | -40°C to +125°C   | 5-Pin TSOT23                          | Pb-Free     |
| MIC5307-1.8YD5 | QQ18*        | 1.8V    | -40°C to +125°C   | 5-Pin TSOT23                          | Pb-Free     |
| MIC5307-2.8YD5 | QQ28*        | 2.8V    | -40°C to +125°C   | 5-Pin TSOT23                          | Pb-Free     |
| MIC5307-3.0YD5 | QQ30*        | 3.0V    | -40°C to +125°C   | 5-Pin TSOT23                          | Pb-Free     |
| MIC5307-2.8YMT | Q28**        | 2.8V    | -40°C to +125°C   | 6-Pin 2mm x 2mm Thin MLF <sup>®</sup> | Pb-Free     |

### Notes


\* Underbar ( \_ ) symbol may not be to scale.

\*\* 2x2mm Thin MLF<sup>®</sup> is a GREEN RoHS compliant package. Lead finish is NiPdAu. Mold compound is Halogen Free.

## Pin Configuration



**MIC5307-x.xYD5**  
5-Pin Thin SOT23 (D5)



**MIC5307-x.xYMT**  
6-Pin 2mm x 2mm Thin MLF<sup>®</sup> (MT)

## Pin Description

| Pin Number TSOT23 | Pin Number Thin MLF <sup>®</sup> | Pin Name | Pin Function   |
|-------------------|----------------------------------|----------|--|
| 1                 | 3                                | VIN      | Supply Input   |
| 2                 | 2                                | GND      | Ground   |
| 3                 | 1                                | EN       | Enable Input. Active High. High = on, low = off. Do not leave floating |
| 4                 | 5                                | NC       | No Connect   |
| 5                 | 4                                | VOUT     | Output Voltage   |
| -                 | 6                                | NC       | No Connect   |

**Absolute Maximum Ratings<sup>(1)</sup>**

|  |                    |
|--|--------------------|
| Supply Voltage ( $V_{IN}$ )                | 0V to 6V           |
| Enable Input Voltage ( $V_{EN}$ )          | 0V to 6V           |
| Power Dissipation ( $P_D$ ) <sup>(3)</sup> | Internally Limited |
| Junction Temperature ( $T_J$ )             | -40°C to +125°C    |
| Lead Temperature (soldering, 5sec.)        | 260°C              |
| Storage Temperature ( $T_s$ )              | -65°C to +150°C    |
| ESD Rating <sup>(4)</sup>                  | 2kV                |

**Operating Ratings<sup>(2)</sup>**

|                                  |                 |
|----------------------------------|-----------------|
| Supply voltage ( $V_{IN}$ )      | 2.4V to +5.5V   |
| Enable Input Voltage             | 0V to $V_{IN}$  |
| Junction Temperature ( $T_J$ )   | -40°C to +125°C |
| Thermal Resistance               |                 |
| TSOT23-5 ( $\theta_{JA}$ )       | 235°C/W         |
| 2x2 Thin MLF-6 ( $\theta_{JA}$ ) | 93°C/W          |

**Electrical Characteristics<sup>(5)</sup>**












$V_{IN} = V_{OUT} + 1.0V$ ;  $C_{OUT} = 2.2\mu F$ ;  $I_{OUT} = 100\mu A$ ;  $T_J = 25^\circ C$ , **bold** values indicate -40°C to +125°C, unless noted.

| Parameter                      | Condition  | Min        | Typ  | Max               | Units         |
|--------------------------------|--|------------|------|-------------------|---------------|
| Output Voltage Accuracy        | Variation from nominal $V_{OUT}$                             | -1         |      | +1                | %             |
|                                | Variation from nominal $V_{OUT}$ ; -40°C to +125°C           | <b>-2</b>  |      | <b>+2</b>         | %             |
| Line Regulation                | $V_{IN} = V_{OUT} + 1V$ to 5.5V                              |            | 0.01 | 0.3<br><b>0.5</b> | %/V<br>%/V    |
| Load Regulation                | $I_{OUT} = 100\mu A$ to 300mA                                |            | 0.5  | 1<br><b>1.5</b>   | %<br>%        |
| Dropout Voltage <sup>(4)</sup> | $I_{OUT} = 50mA$   |            | 20   |                   | mV            |
|                                | $I_{OUT} = 100mA$  |            | 40   |                   | mV            |
|                                | $I_{OUT} = 150mA$  |            | 60   |                   | mV            |
|                                | $I_{OUT} = 300mA$  |            | 120  | <b>250</b>        | mV            |
| Ground Pin Current             | $I_{OUT} = 0mA$ to 150mA; $V_{IN} = 5.5V$                    |            | 18   |                   | $\mu A$       |
|                                | $I_{OUT} = 0mA$ to 300mA; $V_{IN} = 5.5V$                    |            | 20   | <b>30</b>         | $\mu A$       |
| Ground Pin Current in Shutdown | $V_{EN} \leq 0.2V$ ; $V_{IN} = 5.5V$                         |            | 0.01 | <b>1</b>          | $\mu A$       |
| Ripple Rejection               | $f = 10Hz$ to 1kHz; $C_{OUT} = 2.2\mu F$ ; $I_{OUT} = 300mA$ |            | 62   |                   | dB            |
|                                | $f = 20kHz$ ; $C_{OUT} = 2.2\mu F$ ; $I_{OUT} = 300mA$       |            | 35   |                   | dB            |
| Current Limit                  | $V_{OUT} = 0V$   | 350        | 500  | 800               | mA            |
| Thermal Shutdown               |  |            | 160  |                   | °C            |
| Thermal Shutdown Hysteresis    |  |            | 20   |                   | °C            |
| Output Voltage Noise           | $C_{OUT} = 2.2\mu F$ ; 10Hz to 100kHz                        |            | 80   |                   | $\mu V_{RMS}$ |
| <b>Enable Input</b>            |  |            |      |                   |               |
| Enable Input Voltage           | Logic Low  |            |      | <b>0.2</b>        | V             |
|                                | Logic High   | <b>1.0</b> |      |                   | V             |
| Enable Input Current           | $V_{IL} \leq 0.2V$   |            | 0.01 | <b>1</b>          | $\mu A$       |
|                                | $V_{IH} \geq 1.0V$   |            | 0.01 | <b>1</b>          | $\mu A$       |
| Turn-on Time <sup>(6)</sup>    | $C_{OUT} = 2.2\mu F$   |            | 270  | <b>500</b>        | $\mu s$       |

Notes:


- Exceeding the absolute maximum rating may damage the device.
- The device is not guaranteed to function outside its operating rating.
- The maximum allowable power dissipation of any  $T_A$  (ambient temperature) is  $P_{D(max)} = T_{J(max)} - T_A / \theta_{JA}$ . Exceeding the maximum allowable power dissipation will result in excessive die temperature, and the regulator will go into thermal shutdown.
- Devices are ESD sensitive. Handling precautions recommended.
- Specification for packaged product only.
- Turn-on time is measured from  $V_{EN} = 1V$  of the positive edge of the enable signal to 90% of the rising edge of the output voltage of the regulator.

# Typical Characteristics

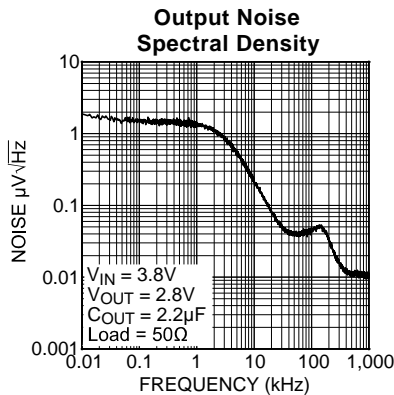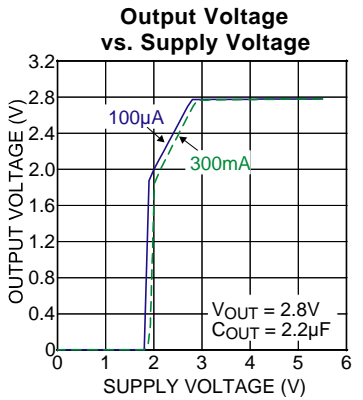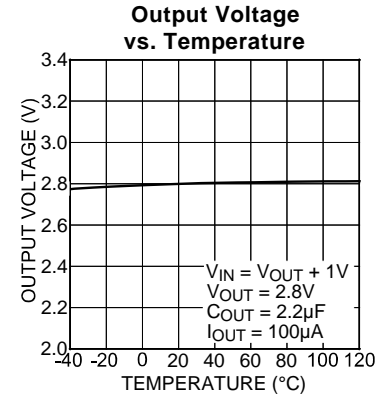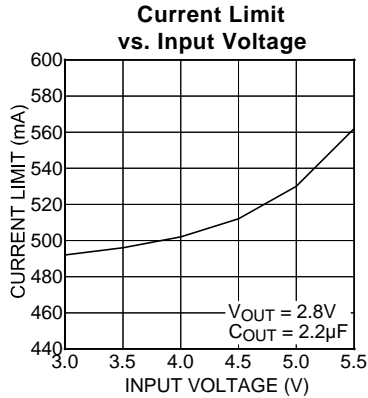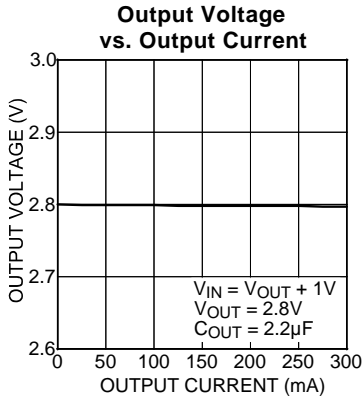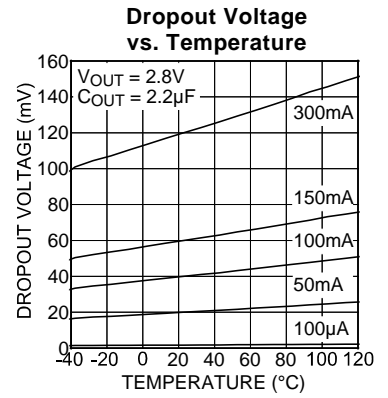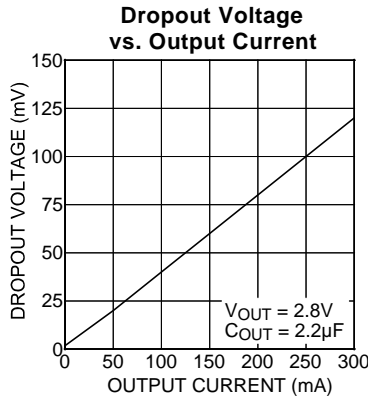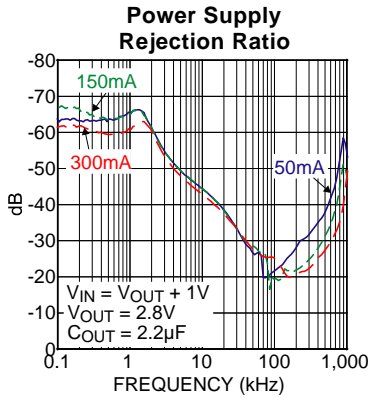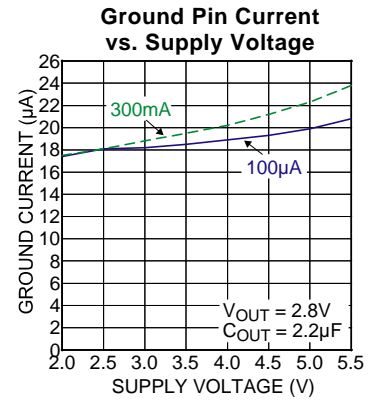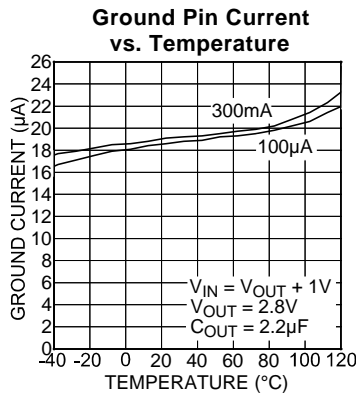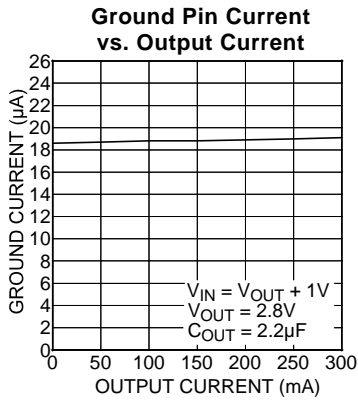


# Functional Characteristics


**Enable Turn-On**

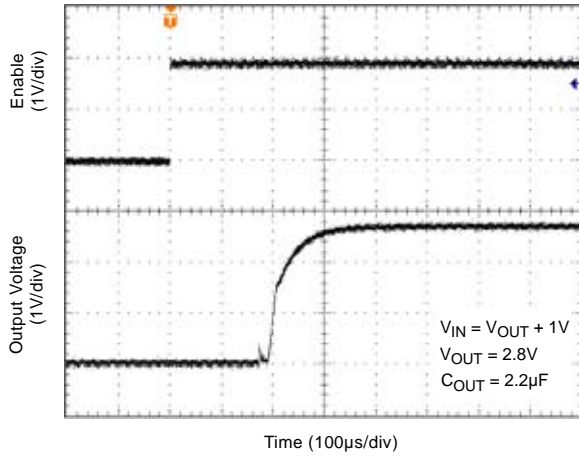

**Load Transient Response**

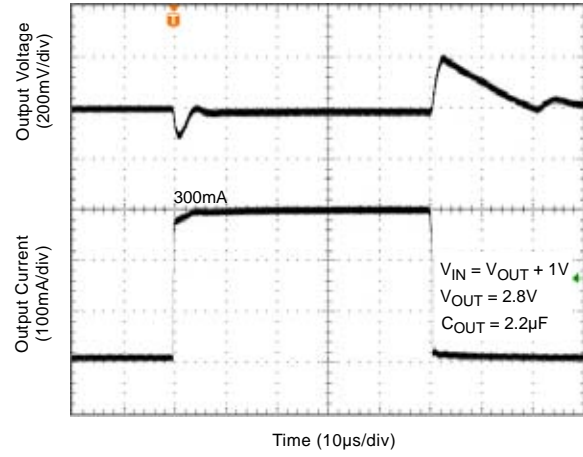

**Line Transient Response**

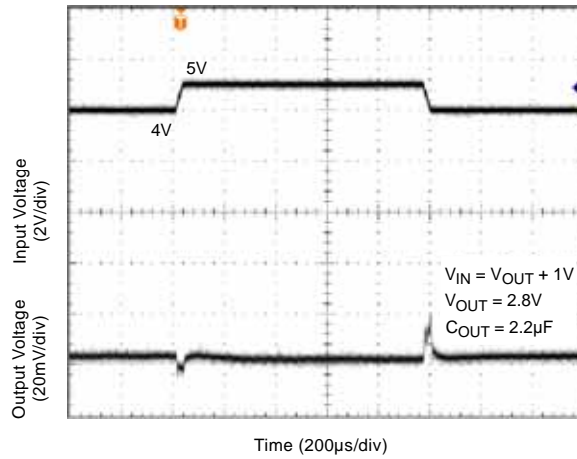

## Application Information

### Input Capacitance

A 1 $\mu$ F capacitor should be placed from IN to GND if there is more than 10 inches of wire between the input and the ac filter capacitor or if a battery is used as the input.

### Output Capacitance

The MIC5307 requires an output capacitor of 2.2 $\mu$ F or greater to maintain stability. The design is optimized for use with low-ESR ceramic chip capacitors. High ESR capacitors may cause high frequency oscillation. The output capacitor can be increased, but performance has been optimized for a 2.2 $\mu$ F ceramic output capacitor and does not improve significantly with larger capacitance.

X7R/X5R dielectric-type ceramic capacitors are recommended because of their temperature performance. X7R-type capacitors change capacitance by 15% over their operating temperature range and are the most stable type of ceramic capacitors. Z5U and Y5V dielectric capacitors change value by as much as 50% and 60%, respectively, over their operating temperature ranges. To use a ceramic chip capacitor with Y5V dielectric, the value must be much higher than an X7R ceramic capacitor to ensure the same minimum capacitance over the equivalent operating temperature range.

### Enable

Forcing EN (enable/shutdown) high (>1V) enables the regulator. EN is compatible with CMOS logic gates. If the enable/shutdown feature is not required, connect EN (pin 3) to IN (supply input, pin 1).

### Current Limit

There is overcurrent protection circuitry built into the MIC5307. Even with the output grounded, current will be limited to approximately 500mA. Further protection is provided by thermal shutdown.

### Thermal Considerations

The MIC5307 is designed to provide 300mA of continuous current in a very small package. Maximum ambient operating temperature can be calculated based on the output current and the voltage drop across the part. Given that the input voltage is 3.8V, the output voltage is 2.8V and the output current equals 300mA.

The actual power dissipation of the regulator circuit can be determined using the equation:

$$P_D = (V_{IN} - V_{OUT}) I_{OUT} + V_{IN} I_{GND}$$

Because this device is CMOS and the ground current is typically < 50 $\mu$ A over the load range, the power dissipation contributed by the ground current is < 1% and can be ignored for this calculation.

$$P_D = (3.8V - 2.8V) \cdot 300mA$$

$$P_D = 0.3W$$

To determine the maximum ambient operating temperature of the package, use the junction-to-ambient thermal resistance of the device and the following basic equation:

$$P_D(\max) = \frac{T_J(\max) - T_A}{\theta_{JA}}$$

$T_J(\max) = 125^\circ\text{C}$ , the maximum junction temperature of the die  $\theta_{JA}$  thermal resistance =  $235^\circ\text{C/W}$

Table 1 shows junction-to-ambient thermal resistance for the MIC5307 in the TSOT23-5 package.

| Package  | $\theta_{JA}$ Recommended Minimum Footprint |
|----------|---|
| TSOT23-5 | 235 $^\circ\text{C/W}$                      |

**Table 1. TSOT23-5 Thermal Resistance**

Substituting  $P_D$  for  $P_D(\max)$  and solving for the ambient operating temperature will give the maximum operating conditions for the regulator circuit. The junction-to-ambient thermal resistance for the minimum footprint is  $235^\circ\text{C/W}$ , from Table 1. The maximum power dissipation must not be exceeded for proper operation.

For example, when operating the MIC5307-2.8 at an input voltage of 3.8V and 300mA load with a minimum footprint layout, the maximum ambient operating temperature  $T_A$  can be determined as follows:

$$0.3W = (125^\circ\text{C} - T_A) / 235^\circ\text{C/W}$$

$$T_A = 54.5^\circ\text{C}$$

Therefore, a 2.8V application at 300mA of output current can accept an ambient operating temperature of  $89.8^\circ\text{C}$  in a TSOT23-5 package. For a full discussion of heat sinking and thermal effects on voltage regulators, refer to the "Regulator Thermals" section of Micrel's *Designing with Low-Dropout Voltage Regulators* handbook. This information can be found on Micrel's website at:

[http://www.micrel.com/\\_PDF/other/LDOBK\\_ds.pdf](http://www.micrel.com/_PDF/other/LDOBK_ds.pdf)





---

**MICREL, INC. 2180 FORTUNE DRIVE SAN JOSE, CA 95131 USA**  
TEL +1 (408) 944-0800 FAX +1 (408) 474-1000 WEB <http://www.micrel.com>

The information furnished by Micrel in this data sheet is believed to be accurate and reliable. However, no responsibility is assumed by Micrel for its use. Micrel reserves the right to change circuitry and specifications at any time without notification to the customer.

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is a Purchaser's own risk and Purchaser agrees to fully indemnify Micrel for any damages resulting from such use or sale.

© 2006 Micrel, Incorporated.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LDO Voltage Regulators](#) category:*

*Click to view products by [Microchip](#) manufacturer:*

Other Similar products are found below :

[AP7363-SP-13](#) [L79M05TL-E](#) [PT7M8202B12TA5EX](#) [TCR3DF185,LM\(CT](#) [TCR3DF24,LM\(CT](#) [TCR3DF285,LM\(CT](#) [TCR3DF31,LM\(CT](#)  
[TCR3DF45,LM\(CT](#) [MP2013GQ-33-Z](#) [059985X](#) [NCP4687DH15T1G](#) [701326R](#) [TCR2EN28,LF\(S](#) [NCV8170AXV250T2G](#)  
[TCR3DF27,LM\(CT](#) [TCR3DF19,LM\(CT](#) [TCR3DF125,LM\(CT](#) [TCR2EN18,LF\(S](#) [AP7315-25W5-7](#) [IFX30081LDVGRNXUMA1](#)  
[NCV47411PAAJR2G](#) [AP2113KTR-G1](#) [AP2111H-1.2TRG1](#) [ZLDO1117QK50TC](#) [AZ1117IH-1.8TRG1](#) [TCR3DG12,LF](#) [MIC5514-3.3YMT-](#)  
[T5](#) [MIC5512-1.2YMT-T5](#) [MIC5317-2.8YM5-T5](#) [SCD7912BTG](#) [NCP154MX180270TAG](#) [SCD33269T-5.0G](#) [NCV8170BMX330TCG](#)  
[NCV8170AMX120TCG](#) [NCP706ABMX300TAG](#) [NCP153MX330180TCG](#) [NCP114BMX075TCG](#) [MC33269T-3.5G](#) [CAT6243-ADJCMT5T](#)  
[TCR3DG33,LF](#) [AP2127N-1.0TRG1](#) [TCR4DG35,LF](#) [LT1117CST-3.3](#) [LT1117CST-5](#) [TAR5S15U\(TE85L,F\)](#) [TAR5S18U\(TE85L,F\)](#)  
[TCR3UG19A,LF](#) [TCR4DG105,LF](#) [NCV8170AMX360TCG](#) [MIC94310-NYMT-T5](#)