PM5990/PM5991 DIGI-G4

4x100G/5x40G/20x10G Multi-Service OTN Processor

Summary

The PM5990 DIGI-G4 (with encryption) and PM5991 (no encryption) are members of fourth-generation OTN processing solution for OTN switching and packet-optical transport platforms (P-OTPs/P-OTNs), Wavelength Division Multiplexing (WDM) and Reconfigurable Optical Add-Drop Multiplexers (ROADMs).

Built on the foundation of OTN Processing IP from DIGI 120G, widely deployed in service provider and hyperscale datacenter networks today, the DIGI-G4 is an ultra-high density, multi-service OTN processor. The DIGI-G4 has the feature integration and the scalability to enable the mass deployment of service flexible, elastic bandwidth, resource efficient and cost-effective 100G optical transport architectures required for multi-layer SDN controlled networks.

Reusing proven, carrier-grade OTN Software IP libraries and toolkits, the DIGI-G4 can be leveraged across multiple applications and equipment platforms to reduce OEM development costs while accelerating time-to-market.

The DIGI-G4 expands the DIGI Family of OTN processors, adding key technologies and capabilities such as:

- Deeply channelized architecture, supporting single-chip 400G line card applications
- Integrated 28G SERDES, enabling connectivity to nextgeneration DSPs, optical modules and backplanes
- FIPS 197 certified CrypOTN OTN payload encryption, enabling secure, protocol-agnostic, wire-speed transport applications (PM5990 only)
- OTU4flex, a flexible framer-to-NG-Coherent-DSP interface protocol, enabling scalable line-rate WDM architectures
- Pre-standard OTUCn, supporting Beyond 100G applications
- 5x 40GE over 2x OTU4 muxponder mode, delivering maximum 100G wavelength utilization for 40 GE client WDM applications
- Flexible Interlaken controllers, enabling hybrid OTN/packet line/client card and compact metro OTN switching platform architectures
- Next-generation datacenter/storage client support, support, including 25GE and 16G and 32G Fibre Channel
- Integrated GCC processor, reducing the need for auxiliary components and lowering the overall line card cost
- Per-port LLDP packet monitoring for 10GE/40GE/100GE clients, enabling WAN topology auto-discovery in DCI and SDN-enabled applications

Highlights

Reduces Service Provider CapEx and OpEx for 100G Deployments

- High-capacity OTN switching and aggregation with support for hybrid packet/OTN
- Optical transport architectures dramatically improves 100G wavelength utilization and simplifies equipment deployment and network management
- Universal line card solution simplifies line card management

Supports Datacenter Interconnect (DCI) Transport Requirements

- Integrated FIPS 197 certified protocol-agnostic wire-speed layer 1 OTN payload encryption
- Integrated LLDP packet monitoring on Ethernet clients for WAN topology auto-discovery in DCI and SDN-enabled transport networks
- On-chip OTN switch enabling the design of high-capacity, compact Nx100G DCI platforms

Enables Unprecedented Service Delivery and Network Deployment Flexibility

- Widest range of multi-service client mappings into OTN
- Enables full SNCP-based protection switching for ring, point-to-point or meshed network topologies
- Multi-stage OTN multiplexing, enabling compatibility and interoperability between network nodes




www.microchip.com


Optimized Power and Footprint for OEMs

- Connects directly to a wide range of 100G, 40G and 10G optical modules including CFP, CFP2, CFP4, QSFP28, CXP (limiting), QSFP/QSFP+ (limiting), XFP, SFP+ (limiting)
- Generates all client protocols and device interface rates from internal PLLs with a single 125 MHz external reference clock •
- Provides glueless interconnects to many off-the-shelf NPs and switch fabrics
- Carrier-grade, field-proven OTN Software Development Kit reduces OEM development costs and accelerates time to market •


Single-Chip 400G OTN Line Card

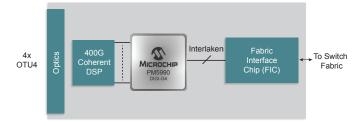


20x 10G/4x 40G/2x 100G Line/Client/ **Hybrid P-OTP Line Card**



Single-Chip 200G Muxponder/Transponder



Single-Chip 200G Compact ADM



For More Information

www.microsemi.com

The Microchip name and logo and the Microchip logo are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries. All other trademarks mentioned herein are property of their respective companies © 2019, Microchip Technology Incorporated. All Rights Reserved. 8/19

DS00003129A



www.microchip.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Interface - Specialised category:

Click to view products by Microchip manufacturer:

Other Similar products are found below :

CY7C910-51LMB MEC1632-AUE RKSAS4 HMC677G32 LPC47N207-JV FTP-637DSL633R SM712GX04LF04-BA MCW1001A-I/SS HOA6241-001 SC74HC4066ADTR2G AS3935-BQFT NCN5120MNTWG NCN5150DR2G NCN8025MTTBG C100N50Z4A DG407AK/883B SRT2-ATT01 TDA8035HN/C1/S1J LTC1694CS5#TRMPBF DS90UB947TRGCRQ1 SP510ECF-L NCS2300MUTAG HMC677LP5E HMC677LP5ETR LTC1756EGN#PBF LTC1955EUH#PBF LT3669EUFD-2#PBF LTC6820HMS#3ZZTRPBF MXL1543BCAI MAX3170CAI+ XL1192D CP82C59AZ KTU1109EFAA-TR CH368L CH7307C-DEF LTC1694-1IS5#TRMPBF LTC1694CS5#TRPBF LTC1694IS5#TRM LTS 25-NP 73S8024RN-20IMF 73S8024RN-1L/F DS2413P+ DS2413P+T&R DS28E17Q+ DS8113-RNG+ MAX13036ATI+ MAX13174ECAG+ MAX216CWN+ MAX3172CAI+ AS8222-HSSM