



Helping Customers Innovate, Improve & Grow

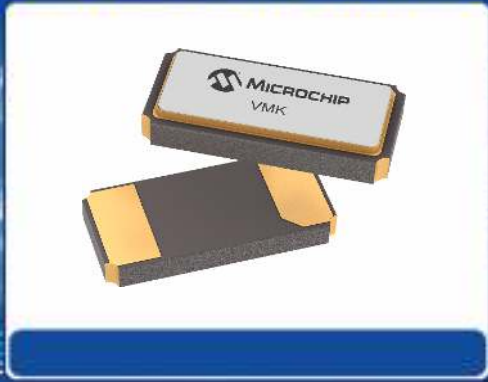

Description

Vectron's VMK series 32.768 kHz tuning fork is used as a building block for 32.768 kHz oscillator clocks, and associated divide-by to generate a 1 Hz / 1 second clock signal. The VMK3 is a 3.2x1.5 ceramic hermetically sealed package and VMK4 is 2.0x1.2.

Features

- ± 20 ppm Initial Accuracy
- -20/70°C or -40/85°C operating temperature
- Small Industry Standard Packages
- Product is compliant to RoHS directive  and fully compatible with lead free assembly

Applications

- Real Time CLOCKS
- Microprocessors
- Wearables
- IoT
- Bluetooth Low Energy
- Medical, Hearing Aids, Meters and Monitors
- Security

Block Diagram



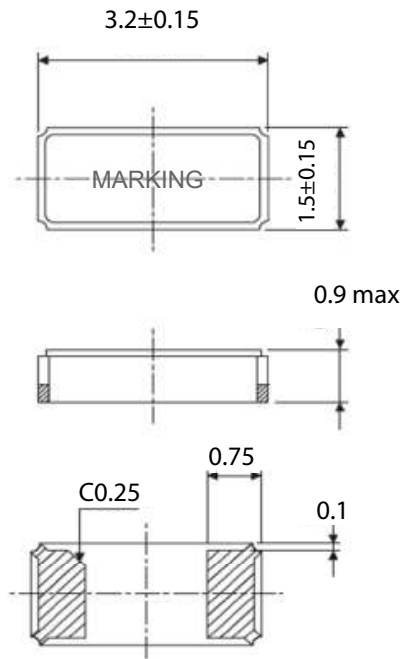


Table 1. VMK3 Electrical Performance


Parameter	Symbol	Min.	Typ	Max	Units
Nominal Frequency	F_{NOM}		32.768		kHz
Crystal Mode		Tuning Fork			
Operating Temperature Range, <i>ordering option</i>	T_{OP}	-20 to 70, -40 to 85			°C
Frequency Stability					
Stability Over T_{OP}	F_{STAB}			-0.040	ppm/°C ²
Turnover Temperature		20	25	30	°C
Frequency Tolerance, referenced to 25 °C	F_{TOL}			±20	ppm
Load Capacitance, <i>ordering option</i>	C_L	6, 7, 9 or 12.5			pF
Equivalent Series Resistance	ESR			70	KOhms
Shunt Capacitance	C_o		1.2	3.0	pF
Motional Capacitance	C_1		3.5		fF
Drive Level				1.0	uW
Aging / 1st year	F_{AGE}			±3	ppm
Storage Temperature	T_{STO}	-55		125	°C
Package		3.2 x 1.5			mm
Weight			13		mg

Product is compliant to RoHS directive and fully compatible with lead free assembly. 

VMK3 Package Drawing and Pad Layout

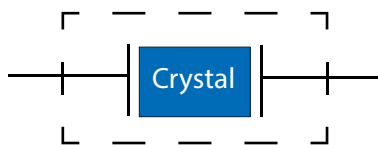

Top View



Marking Information

327YWW


where

327 = 32.768 kHz

Y= Year of Manufacturing

WW = Week of Manufacturing


Recommended Pad Layout

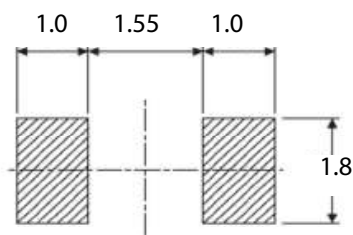


All Dimensions in mm

Table 2. VMK4 Electrical Performance


Parameter	Symbol	Min.	Typ	Max	Units
Nominal Frequency	F_{NOM}		32.768		kHz
Crystal Mode		Tuning Fork			
Operating Temperature Range, <i>ordering option</i>	T_{OP}	-20 to 70, -40 to 85			°C
Frequency Stability					
Stability Over T_{OP}	F_{STAB}			-0.045	ppm/°C ²
Turnover Temperature		20	25	30	°C
Frequency Tolerance, referenced to 25 °C	F_{TOL}			±20	ppm
Load Capacitance, <i>ordering option</i>	C_L	6, 7, 9 or 12.5			pF
Equivalent Series Resistance	ESR			90	KOhms
Shunt Capacitance	C_o			1.5	pF
Motional Capacitance	C_1		4.7		fF
Drive Level				1.0	uW
Aging / 1st year	F_{AGE}			±3	ppm
Storage Temperature	T_{STO}	-55		125	°C
Package		2.0 x 1.2			mm
Weight		6			mg

Product is compliant to RoHS directive and fully compatible with lead free assembly. 

VMK4 Package Drawing and Pad Layout

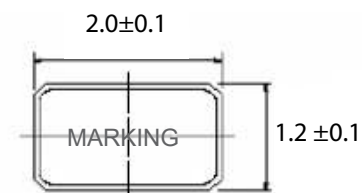

Top View



Marking Information



327YWW

where

327 = 32.768 kHz


Y= Year of Manufacturing

WW = Week of Manufacturing



0.5 ±0.1 0.5 ±0.1

Recommended Pad Layout



All Dimensions in mm

Table 3. Environmental Compliance

Parameter	Conditions
Mechanical Shock	MIL-STD-883, Method 2002, Condition A
Mechanical Vibration	MIL-STD-883, Method 2007, Condition A
Temperature Cycle	MIL-STD-883, Method 1010, Condition B
Solderability	MIL-STD-202-210, Condition B
Gross and Fine Leak	MIL-STD-883, Method 1014
Altitude	MIL-STD-883, Method 1001, Condition B
Moisture Sensitivity Level	MSL 1

Solderprofile:

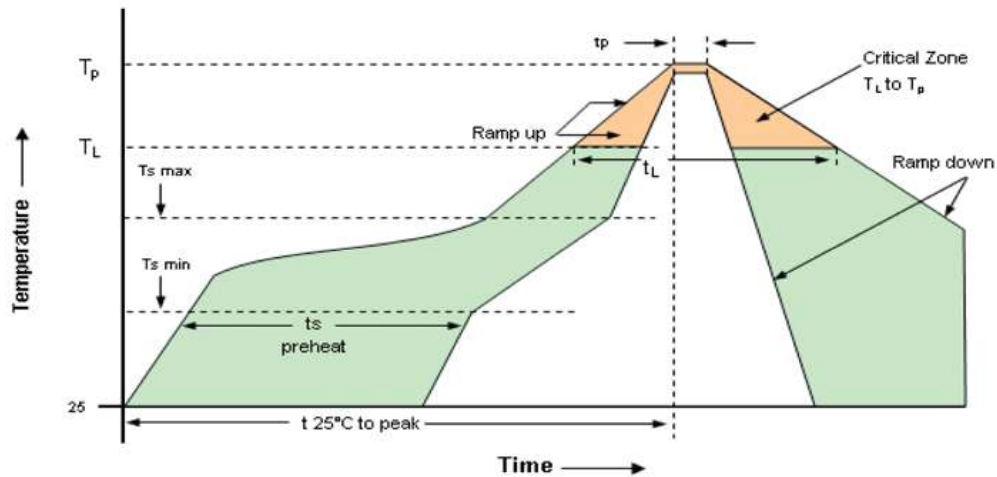


Table 4. Reflow Profile




Parameter	Symbol	Value
PreHeat Time Ts-min Ts-max	t_s	60 sec Min, 260 sec Max 150°C 200°C
Ramp Up	R_{UP}	3 °C/sec Max
Time Above 217 °C	t_L	60 sec Min, 150 sec Max
Time To Peak Temperature	T_{AMB-P}	480 sec Max
Time at 260 °C	t_p	10 sec Max
Ramp Down	R_{DN}	6 °C/sec Max

Tuning fork products oscillate at frequency bands that are close to ultrasonic cleaning process's, this may cause electrical resonance deterioration and even damaging the overall structure of devices. Using ultrasonic cleaning machine to clean tuning fork devices should be avoided. If the use of this method to clean tuning fork devices is required, it's recommended to qualify the process and functionality of devices before and after the cleaning process.

Tape & Reel


Table 5 . Tape and Reel Dimensions

Tape Dimensions (mm)						Reel Dimensions (mm)							
Dimension	W	F	Do	Po	P1	A	B	C	D	N	W1	W2	# Per Reel
VMK3	12	5.5	1.5	4.0	4.0	180	2	13	21	60	13.0	15.4	3000
VMK4	8	3.5	1.5	4.0	4.0	178	2.5	13	21	60	9	11.4	3000

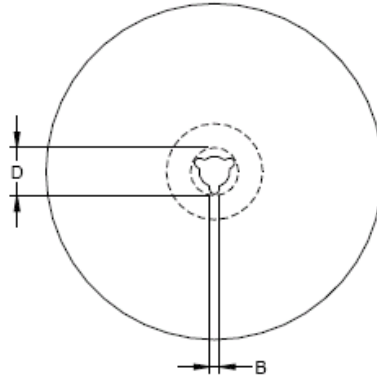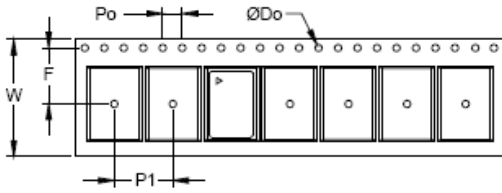

Ordering Information

VMKx - 1Ex- xx- 32K7680000xx

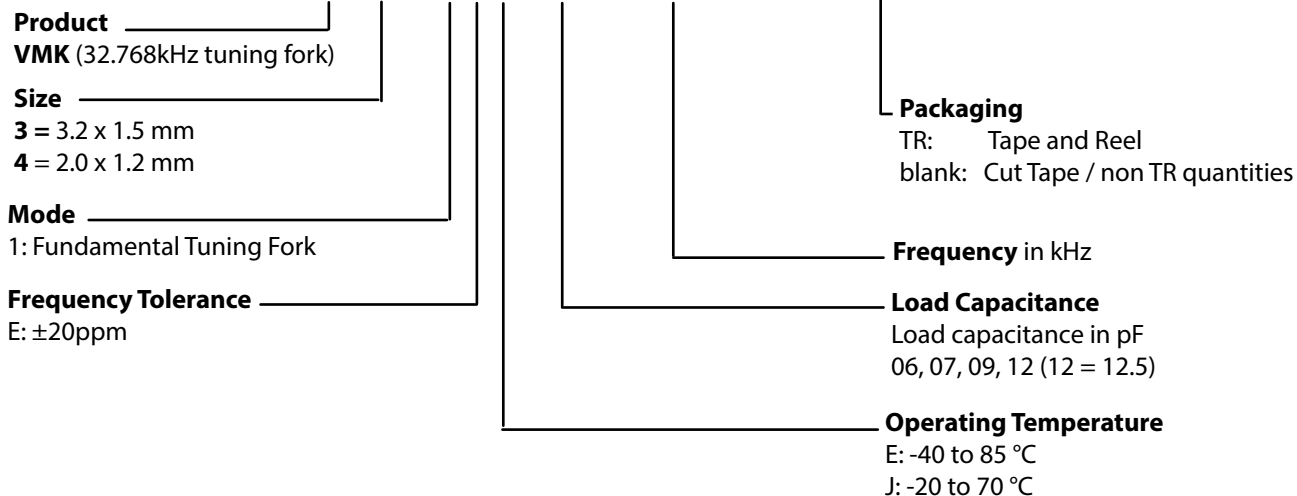

Example:

VMK3-1EE-32K7680000TR
VMK3-1EE-32K7680000
VMK3-1EE-32K7680000_SNPB

Tape and Reel
Cut Tape
Tin lead solder dipped

Revision History

Revision Date	Approved	Description
July 17, 2020	FB	Initial release

Contact Information

USA:

100 Watts Street
Mt Holly Springs, PA 17065
Tel: 1.717.486.3411
Fax: 1.717.486.5920

Europe:

Landstrasse
74924 Neckarbischofsheim
Germany
Tel: +49 (0) 7268.801.0
Fax: +49 (0) 7268.801.281



Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATION OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING, BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly, or otherwise, under any Microchip intellectual property rights unless otherwise stated.

Trademarks

The Microchip and Vectron names and logos are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Crystals](#) category:

Click to view products by [Microchip](#) manufacturer:

Other Similar products are found below :

[MC405 32.0000K-R3:PURE SN](#) [7B-27.000MBBK-T](#) [MP1-8.0 99-BU](#) [9B-15.360MBBK-B](#) [PTX-A2JM-10.000M](#) [9C-7.680MBBK-T](#) [H10S-12.000-18-EXT-TR](#) [R38-32.768-12.5-5PPM-NPB](#) [BTD1062E05A-513](#) [21U15A-21.4MHZ](#) [RTX-781DF1-S-20.950](#) [LFXTAL066198Cutt](#) [9C-14.31818MBBK-T](#) [A-11.000MHZ-27](#) [SPT2A-.032768B](#) [SPT2A.032768G](#) [SSPT7F-9PF20-R](#) [FX325BS-38.88EEM1201](#) [MP-1-25.000MHZ-3L](#) [MP-1-6.000MHZ](#) [LFXTAL065253Cutt](#) [LFXTAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [646G-24-2](#) [7B-30.000MBBK-T](#) [6504-202-1501](#) [6526-202-1501](#) [BTJ120E02C](#) [SG636PCE-20.000MC](#) [3404](#) [CM315D32768EZFT](#) [C1E-24.000-7-2020-R](#) [C1E-19.200-12-1530-X-R](#) [C1E-16.000-12-1530-X-R](#) [ABM11-16.000MHZ-9-B1U-T](#) [FL5000014](#) [EUCA18-3.1872M](#) [425F35E027M0000](#) [17196](#) [ABM3-13.52313MHZ-10-B4Y-T](#) [MS3V-T1R-32.768kHz-7pF-20PPM-TA-QC-Au](#) [VXM7-1C1-16M000](#) [MS1V-T1K-32.768kHz-10pF-20PPM-TA-QC-Au](#) [MS3V-T1R-32.768kHz-9pF-20PPM-TA-QC-Au](#) [ECS-80-18-30-JGN-TR](#) [17000](#) [17301](#) [16875](#)