

# **VSC7223**

#### Multirate 16 Gbps Quad Adaptive Channel Extender with All-Rate CRU

Microsemi's advanced unidirectional lane adaptive channel extender equalizes deteriorated input signals while dissipating the lowest possible power.

The VSC7223 device is a quad unidirectional lane adaptive channel extender with a CRU. It incorporates input equalization, clock and data recovery, and output de-emphasis. It operates at data rates from 155 Mbps to 16 Gbps.

The VSC7223 device is a simple-to-use copper media receiver and driver that provides electrical compensation to cable, copper, and backplane environments to increase system margin and media driving distances. It equalizes greater than 65 inches of FR-4 at 10 Gbps and greater than 15 meters of 24AWG of SFP+ copper direct-attached cable at 10 Gbps.

The VSC7223 device can be used either on its own or with an external microcontroller to control, monitor, and enhance system performance.

The VSC7223 device uses advanced technology to equalize deteriorated input signals while dissipating the lowest possible power. A low-cost 25 MHz crystal, along with an on-chip frequency synthesizer, allows for CRU operation at any data rate. Its three-tap FIR output driver architecture enables up to 20 dB of de-emphasis at 10 Gbps.

The VSC7223 device includes Microsemi's patented VScope™ input signal monitoring integrated circuit waveform viewing technology.


The VSC7223 device is available in a compact 5 mm x 9 mm 48-pin QFN package. The device operates on a single supply of 1.2 volts.

## Highlights

- World-class adaptive equalization
- Wide retiming range from 155 Mbps to 16 Gbps
- 20 dB input equalization
- Retimer and re-driver modes
- Built-in VScope
- On-chip frequency synthesizers

#### **Applications**

- Wideband signal switching, clean-up, and retimer
- Line, backplane, and copper cable driver, receiver, and retimer
- PCB signal enhancement
- Optical module retimer and receiver

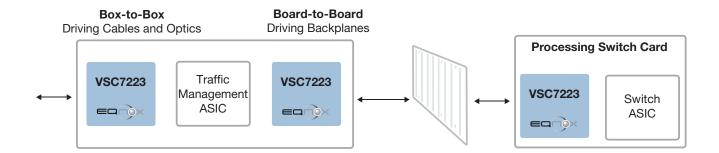

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or circuit. The products sold hereunder and any other products sold by Microsemi have been subject to limited testing and should not be used in conjunction with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not verified, and Buyer must conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with the Buyer. Microsemi does not grant, explicitly or implicitly, to any party any pattent rights, licenses, or any other IP rights, whether with regard to such information is entirely by information. Information provided in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to the information in this document or to any products and services at any time without notice.



# **VSC7223**

#### Multirate 16 Gbps Quad Adaptive Channel Extender with All-Rate CRU

#### **Key Benefits**

- Simple-to-use device
- Low module and system power consumption
- Auto-adapts equalizer and DFE tap settings
- Wide range of data rate operation with 25 MHz crystal and built-in frequency synthesizer
- World-class adaptive equalization
- LOS detection
- Built-in VScope input signal monitoring integrated circuit eye diagram monitoring

#### **Architecture**

- Two-wire serial port for optional microcontroller
- Pin-strap option for operation without microcontroller
- Four-tap decision feedback equalizer (DFE)
- Built-in diagnostics


## **Key Specifications**

- 1.2 V single power supply
- 180 mW per channel power consumption (retimer)
- 110 mW per channel power consumption (re-driver)
- 18 dB programmable output de-emphasis
- Two-wire serial interface
- Compact 5 mm x 9 mm QFN package

#### **Related Products**

Visit www.microsemi.com for information about these related products:

- VSC3308
- VSC3316
- VSC7227

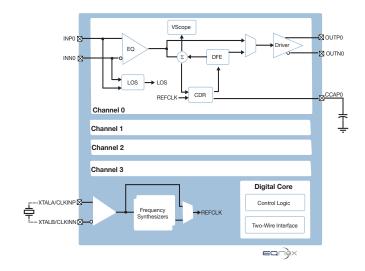



Microsemi Corporate Headquarters
One Enterprise, Aliso Viejo, CA 92656 USA
Within the USA: +1 (800) 713-4113
Outside the USA: +1 (949) 380-6100
Sales: +1 (949) 380-6136
Fax: +1 (949) 215-4996
email: sales.support@microsemi.com
www.microsemi.com

Microsemi Corporation (Nasdaq: MSCC) offers a comprehensive portfolio of semiconductor and system solutions for communications, defense and security, aerospace, and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs, and ASICs; power management products; timing and synchronization devices and precise time solutions; voice processing devices; RF solutions; discrete components; enterprise storage and communications solutions, security technologies, and scalable anti-tamper products; Ethernet solutions; Power-over-Ethernet ICs and midspans; custom design capabilities and services. Microsemi is headquartered in Aliso Viejo, California, and has approximately 4,800 employees worldwide. Learn more at www.microsemi.com.

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Interface - Specialised category:

Click to view products by Microchip manufacturer:

Other Similar products are found below:

CY7C910-51LMB MEC1632-AUE RKSAS4 HMC677G32 LPC47N207-JV FTP-637DSL633R SM712GX04LF04-BA MCW1001A-I/SS HOA6241-001 SC74HC4066ADTR2G AS3935-BQFT NCN5120MNTWG NCN5150DR2G NCN8025MTTBG C100N50Z4A DG407AK/883B SRT2-ATT01 TDA8035HN/C1/S1J LTC1694CS5#TRMPBF DS90UB947TRGCRQ1 SP510ECF-L NCS2300MUTAG HMC677LP5E HMC677LP5ETR LTC1756EGN#PBF LTC1955EUH#PBF LT3669EUFD-2#PBF LTC6820HMS#3ZZTRPBF MXL1543BCAI MAX3170CAI+ XL1192D CP82C59AZ KTU1109EFAA-TR CH368L CH7307C-DEF LTC1694-1IS5#TRMPBF LTC1694CS5#TRPBF LTC1694IS5#TRM LTS 25-NP 73S8024RN-20IMF 73S8024RN-IL/F DS2413P+ DS2413P+T&R DS28E17Q+ DS8113-RNG+ MAX13036ATI+ MAX13174ECAG+ MAX216CWN+ MAX3172CAI+ AS8222-HSSM