

Features

- Halogen Free. "Green" Device (Note 1)
- AEC-Q101 Qualified
- High Speed Switching Diode
- Fast Switching Speed
- For General Purpose Switching Applications
- Moisture Sensitivity Level 1
- Epoxy Meets UL 94 V-0 Flammability Rating
- Lead Free Finish/RoHS Compliant ("P" Suffix Designates RoHS Compliant. See Ordering Information)

Maximum Ratings


- Operating Junction Temperature Range: -65°C to +150°C
- Storage Temperature Range: -65°C to +150°C

| MCC Part Number | Device Marking | | |
|--------------------|----------------|--|--|
| 1SS355HE3 | А | | |

| Parameter | Symbol | Value |
|---------------------------------|---------------------|-------|
| Peak Repetitive Reverse Voltage | V _{RRM} | 90V |
| DC Reverse Voltage | V _R | 80V |
| RMS Reverse Voltage | V _{R(RMS)} | 63V |
| Forward Continuous Current | I _{FM} | 150mA |
| Peak Forward Surge Current | I _{FSM} | 0.5A |


Note: 1. Halogen free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.

90 Volt Switching Diode

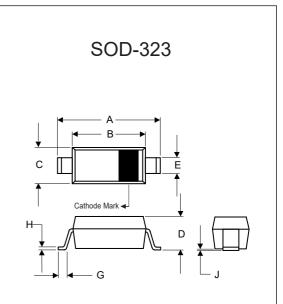

| DIMENSIONS | | | | | |
|------------|-------|--------|------|------|------|
| | | HES MM | | NOTE | |
| | MIN | MAX | MIN | MAX | NOTE |
| A | 0.090 | 0.107 | 2.30 | 2.70 | |
| В | 0.063 | 0.071 | 1.60 | 1.80 | |
| С | 0.045 | 0.053 | 1.15 | 1.35 | |
| D | 0.031 | 0.045 | 0.80 | 1.15 | |
| E | 0.010 | 0.016 | 0.25 | 0.40 | |
| G | 0.004 | 0.018 | 0.10 | 0.45 | |
| Н | 0.004 | 0.010 | 0.10 | 0.25 | |
| J | | 0.006 | | 0.15 | |

Suggested Solder Pad Layout

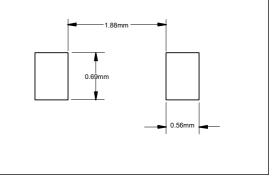



Electrical Characteristics @ 25°C (Unless Otherwise Specified)

| Parameter | Symbol | Conditions | Min. | Тур. | Max. | Units |
|-----------------------|-----------------|--|------|------|------|-------|
| Forward Voltage | V _F | I _F =100mA | | | 1.2 | V |
| Reverse Current | I _R | V _R =80V | | | 0.1 | μA |
| Junction Capacitance | CJ | V _R = 6V, f = 1MHz | | 3 | | pF |
| Reverse Recovery Time | t _{rr} | I _F =I _R =10mA, I _{rr} =0.1×I _R ,R _L =100Ω | | | 4 | ns |

* Pulse Test: Pulse Width 300 µsec, Duty Cycle 2%



Curve Characteristics

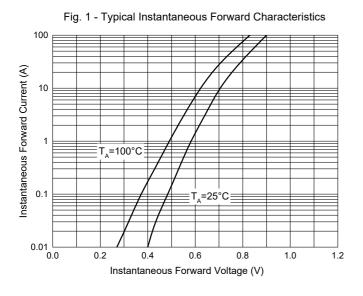
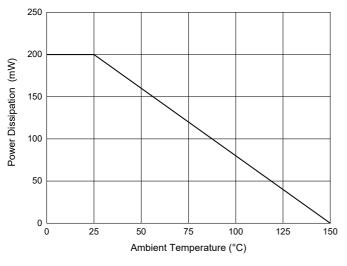


Fig. 3 - Power Derating Curve



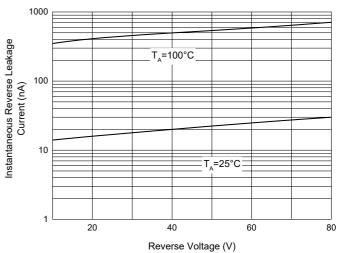


Fig. 2 - Typical Reverse Leakage Characteristics



Ordering Information

| Device | Packing |
|----------------|-----------------------|
| Part Number-TP | Tape&Reel: 3Kpcs/Reel |

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp*. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp*. and all the companies whose products are represented on our website, harmless against all damages. *Micro Commercial Components Corp*. products are sold subject to the general terms and conditions of commercial sale, as published at

https://www.mccsemi.com/Home/TermsAndConditions.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources**. MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Small Signal Switching Diodes category:

Click to view products by Micro Commercial Components (MCC) manufacturer:

Other Similar products are found below :

BAS16E6433HTMA1 SHN2D02FUTW1T1G BAS 16-02L E6327 BAS 16-02V H6327 BAS 21U E6327 BAS 28 E6327 BAW56DWQ-7-F BAW56M3T5G IDW40E65D1 IDW40E65D2 SMMSD4148T3G NSVDAN222T1G CDSZC01100-HF BAS28-7 JANTX1N6640 BAW56HDW-13 BAV99TQ-13-F SMSD1002T1G LS4148 IDV15E65D2 W0503RH200S0L M0268SJ200NLF M0268RJ200NLF DAN217U-TP BAV21W-HE3_A-08 BAV99-HE3_A-08 BAW56-HE3_A-08 BAS16-HE3_A-08 BAS16D-HE3_A-08 BAV19W-HE3_A-08 BAS20-HE3_A-08 BAL99-HE3_A-08 BAV23C-HE3_A-08 DHVSD3004BRM-7 DLLFSD01LP3Q-7 BAS16VVQ-7 IDWD100E120D7XKSA1 IDWD120E120D7XKSA1 IDWD140E120D7XKSA1 IDWD30E120D7XKSA1 IDWD40E120D7XKSA1 IDWD50E120D7XKSA1 IDWD60E120D7XKSA1 IDWD75E120D7XKSA1 BAS21TWQ-7 BAV21WQ-7-F MMBD4448HADWQ-7-F IN4148WSQ-13-F BAW56WQ-7-F BAS716-TP