

Features

- Lead Free Finish/RoHS Compliant(Note 1)("P" Suffix Designates Compliant. See Ordering Information)
- · High Current Capability
- Fast Switching For Higher Efficiency
- Epoxy Meets UL 94 V-0 Flammability Rating
- Moisture Sensitivity Level 1
- Halogen Free Available Upon Request By Adding Suffix "-HF"

0.5 Amp High Voltage Fast Recovery Glass Passivated Rectifier 2000 Volts

Maximum Ratings

- Operating Junction Temperature Range: -55°C to +150°C
- Storage Temperature Range: -55°C to +150°C


MCC Part Number	Device Marking	Maximum Recurrent Peak Reverse Voltage	Maximum	Maximum DC Blocking Voltage
R2000FGP	R2000FGP	2000V	1400V	2000V

Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	I _{F(AV)}	500mA	T _A = 50°C		
Peak Forward Surge Current	I _{FSM}	30A	8.3ms,Half Sine		
Maximum Instantaneous	V _F	2.5V	I _{FM} =0.5A		
Forward Voltage		1.8V	I _{FM} =0.1A		
Maximum DC Reverse Current At Rated DC Blocking	I _R	5.0μA 50μA	T _A =25°C T _A =100°C		
Voltage		σομπ	- A 100 0		
Typical Junction Capacitance	CJ	30pF	Measured at 1.0MHz, V _R =4.0V		
Maximum Reverse Recovery Time	t _{rr}	500nS	I _F =0.5A; I _R =1.0A; I _{rr} =0.25A		

Notes: 1. High Temperature Solder Exemption Applied, See EU Directive Annex 7a.

DO-41

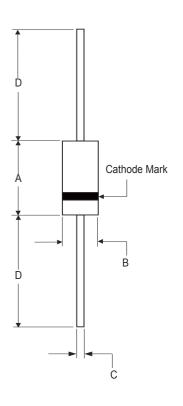

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	NOTE
Α	0.160	0.205	4.10	5.20	
В	0.080	0.107	2.00	2.70	Ф
С	0.028	0.035	0.71	0.90	Ф
D	1.000		25.40		



Curve Characteristics

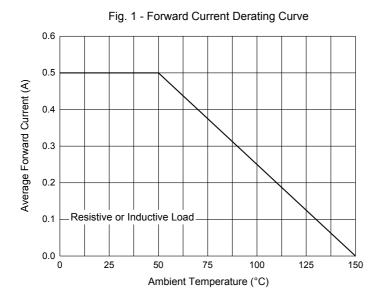
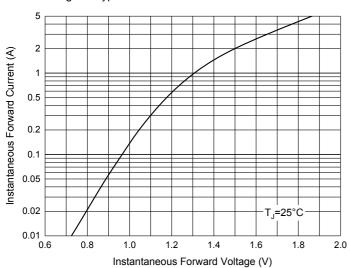


Fig. 3 - Typical Instantaneous Forward Characteristics




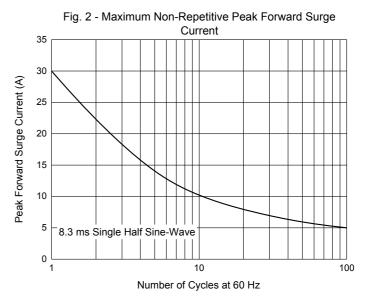


Fig. 4 - Typical Reverse Leakage Characteristics



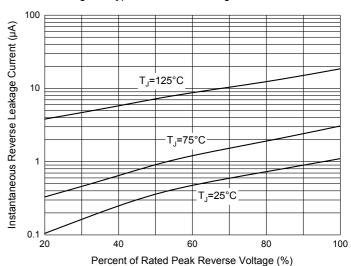

Ordering Information

Device	Packing		
Part Number-TP	Tape&Reel:5Kpcs/Reel		
Part Number-AP	Ammo Packing:5Kpcs/Ammo Box		
Part Number-BP	Bulk: 50Kpcs/Carton		

Note: Adding "-HF" Suffix For Halogen Free, eg. Part Number-TP-HF

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. **Micro Commercial Components Corp**. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp**, and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Diodes - General Purpose, Power, Switching category:

Click to view products by Micro Commercial Components (MCC) manufacturer:

Other Similar products are found below:

MCL4151-TR3 MMBD3004S-13-F RD0306T-H RGP30G-E373 BAQ333-TR BAQ335-TR BAQ33-GS18 BAS1602VH6327XT BAV17-TR BAV19-TR BAV301-TR BAW27-TAP NSVBAV23CLT1G NTE525 1SS181-TP 1SS184-TP 1SS193,LF 1SS193-TP 1SS400CST2RA SBAV99LT3G SDAA13 LL4448-GS18 SHN2D02FUTW1T1G LS4150GS18 LS4151GS08 SMMBD7000LT3G 1N4449 1N4934-E3/73 APT100DL60HJ RFUH20TB3S RGP30G-E354 RGP30M-E3/73 D291S45T MCL4151-TR BAS 16-02L E6327 BAS 16-02V H6327 BAS 28 E6327 BAS33-TAP BAS 70-02V H6327 BAV300-TR BAV303-TR3 BAW27-TR BAW56DWQ-7-F BAW56M3T5G BAW75-TAP BAW76-TR MM230L-CAA MMSD914-TP IDW40E65D1