




# 1SS355

## FAST SWITCHING DIODES

### SOD-323

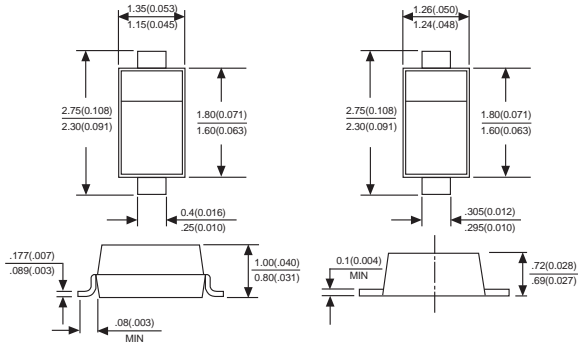

Dimensions in millimeters and (inches)

### FEATURES

- ◆ Small surface mounting type.(UMD2)
- ◆ High speed.( $t_n=1.2ns$  typ.)
- ◆ High reliability with high surge current handling capability.

### MECHANICAL DATA

**Case:** Molded plastic body

**Terminals:** Plated leads solderable per MIL-STD-750, Method 2026

**Polarity:** Polarity symbols marked on case

**Marking:** A

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Maximum ratings and electrical characteristics, Single diode @ $T_A=25^\circ C$

PARAMETER	SYMBOLS	LIMITS	UNITS
DC blocking voltage	$V_R$	80	V
Peak forward current	$I_{FM}$	225	mA
Average rectified output current	$I_o$	100	mA
Surge current (1s)	$I_{Surge}$	500	mA
Junction temperature	$T_J$	125	$^\circ C$
Storage temperature	$T_{STG}$	-55 to +125	$^\circ C$
Non-repetitive peak reverse voltage	$V_{RM}$	90	V

Electrical ratings @ $T_A=25^\circ C$

PARAMETER	SYMBOLS	Min.	Typ.	Max.	Unit	Conditions
Forward voltage	$V_F$			1.2	V	$I_F=100mA$
Reverse current	$I_R$			0.1	$\mu A$	$V_R=80V$
Capacitance between terminals	$C_T$			3	pF	$V_R=0.5, f=1.0MHz$
Reverse recovery time	$t_{rr}$			4	ns	$I_F=10mA, V_R=6V, R_L=100\Omega$



# RATINGS AND CHARACTERISTIC CURVES 1SS355

FIG. 1- FORWARD CHARACTERISTICS

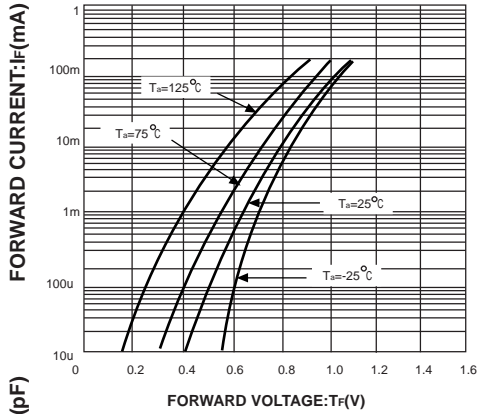


FIG. 2- REVERSE CHARACTERISTICS

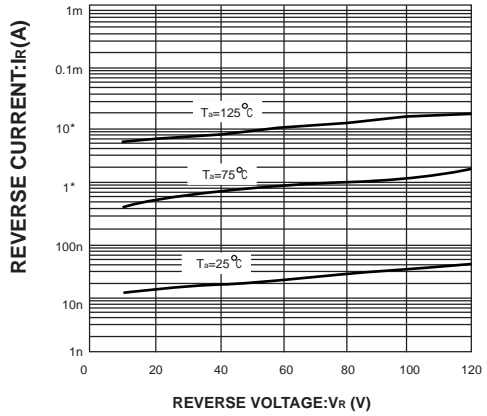


FIG. 3- CAPACITANCE BETWEEN TERMINALS CHARACTERISTICS

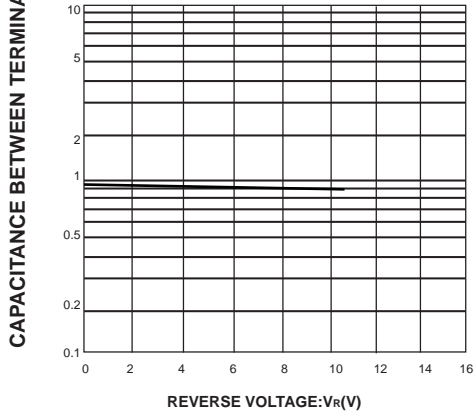


FIG. 4- REVERSE RECOVERY TIME CHARACTERISTICS


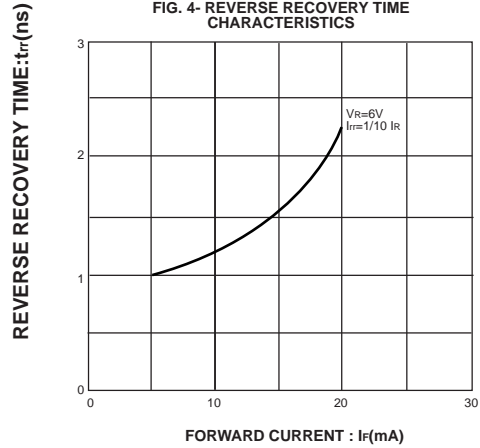


FIG. 5- SURGE CURRENT CHARACTERISTICS



The curve graph is for reference only, can't be the basis for judgment (曲线图仅供参考!)

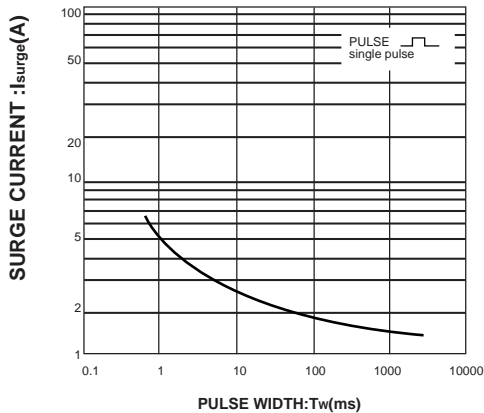

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for* [Diodes - General Purpose, Power, Switching category:](#)

*Click to view products by* [Microdiode Electronics manufacturer:](#)

Other Similar products are found below :

[MCL4151-TR3](#) [MMBD3004S-13-F](#) [RD0306T-H](#) [RD0506LS-SB-1H](#) [RGP30G-E373](#) [DSE010-TR-E](#) [BAQ333-TR](#) [BAQ335-TR](#) [BAQ33-GS18](#) [BAS1602VH6327XT](#) [BAV17-TR](#) [BAV19-TR](#) [BAV301-TR](#) [BAW27-TAP](#) [HSC285TRF-E](#) [NSVBAV23CLT1G](#) [NTE525](#) [1SS181-TP](#) [1SS184-TP](#) [1SS193,LF](#) [1SS193-TP](#) [1SS400CST2RA](#) [SBAV99LT3G](#) [SDAA13](#) [LL4448-GS18](#) [SHN2D02FUTW1T1G](#) [LS4150GS18](#) [LS4151GS08](#) [SMMD7000LT3G](#) [FC903-TR-E](#) [1N4449](#) [1N4934-E3/73](#) [1SS226-TP](#) [APT100DL60HJ](#) [RFUH20TB3S](#) [RGP30G-E354](#) [RGP30M-E3/73](#) [D291S45T](#) [MCL4151-TR](#) [BAS 16-02V H6327](#) [BAS 21U E6327](#) [BAS 28 E6327](#) [BAS33-TAP](#) [BAS 70-02V H6327](#) [BAV300-TR](#) [BAV303-TR3](#) [BAW27-TR](#) [BAW56DWQ-7-F](#) [BAW56M3T5G](#) [BAW75-TAP](#)