




AB34S THRU AB320S

Voltage Range - 40 to 200 V olts Current - 3.0 Ampere


SINGLE PHASE GLASS PASSIVATED BRIDGE RECTIFIERS

Features

- ◆ Ideal for printed circuit board
- ◆ Reliable low cost construction utilizing molded plastic technique
- ◆ High temperature soldering guaranteed: 260°/10 seconds at 5 lbs., (2.3kg) tension
- ◆ Small size, simple installation
- ◆ High surge current capability

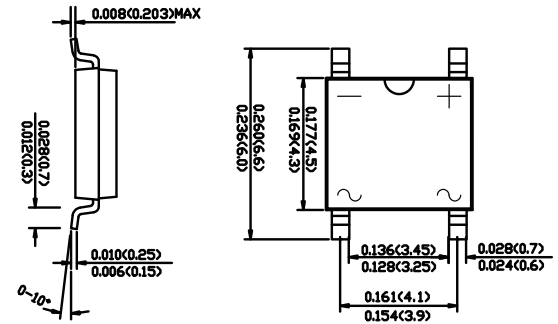

Mechanical Data

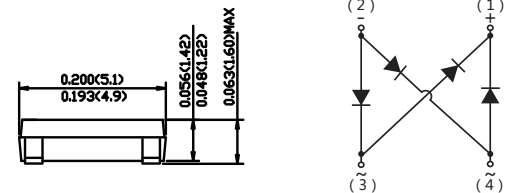

Dimensions in inches and (millimeters)

Case : JEDEC ABS Molded plastic body

Terminals : Solder plated, solderable per MIL-STD-750, Method 2026

Polarity : Polarity symbol marking on body

Mounting Position : Any

Weight : 0.003 ounce, 0.098 grams

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	AB34S	AB36S	AB38S	AB310S	AB320S	UNITS	
		MDD AB34S	MDD AB36S	MDD AB38S	MDD AB310S	MDD AB320S		
Marking Code								
Maximum repetitive peak reverse voltage	V_{RRM}	40	60	80	100	200	V	
Maximum RMS voltage	V_{RMS}	28	42	56	70	140	V	
Maximum DC blocking voltage	V_{DC}	40	60	80	100	200	V	
Maximum average forward rectified current	$I_{F(AV)}$	3.0						A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	80		70				A
Maximum instantaneous forward voltage drop per leg at 3A	V_F	0.55	0.70	0.85		0.95	V	
Maximum DC reverse current at rated DC blocking voltage	I_R	0.5 10		0.3 5			mA mA	
Typical thermal resistance	$R_{\theta JA}$	60						°C/W
Typical junction capacitance	C_j	250	160					pF
Operating temperature range	T_J	-55 to +125						°C
storage temperature range	T_{STG}	-55 to +150						°C

NOTE:1. Measured at 1MHz and applied reverse voltage of 4 V D.C.

2. Mounted on glass epoxy P C board with 4 X (5X5mm) copper pad.



AB34S THRU AB320S

Voltage Range - 40 to 200 V olts Current - 3.0 Ampere

Ratings And Characteristic Curves

Fig.1 Forward Current Derating Curve

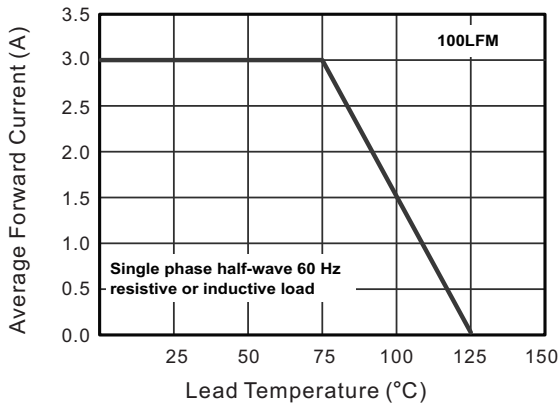


Fig.2 Typical Reverse Characteristics

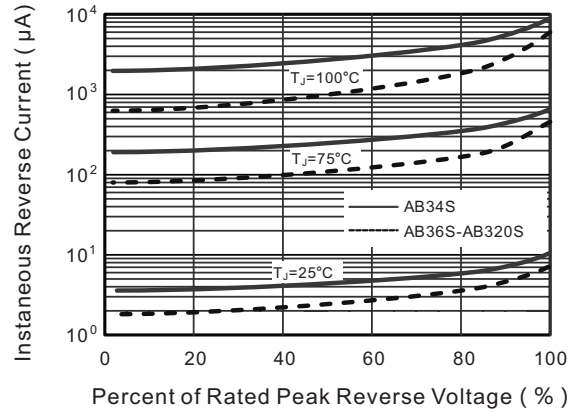


Fig.3 Typical Forward Characteristic

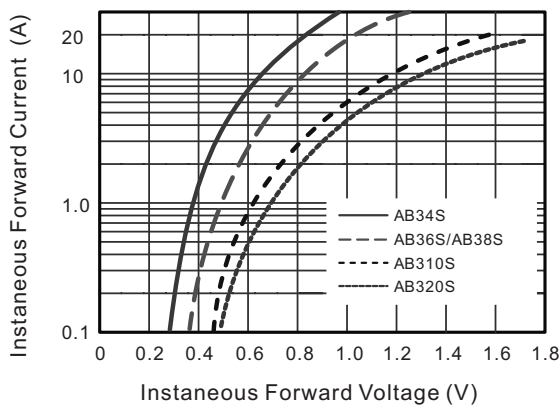


Fig.4 Typical Junction Capacitance


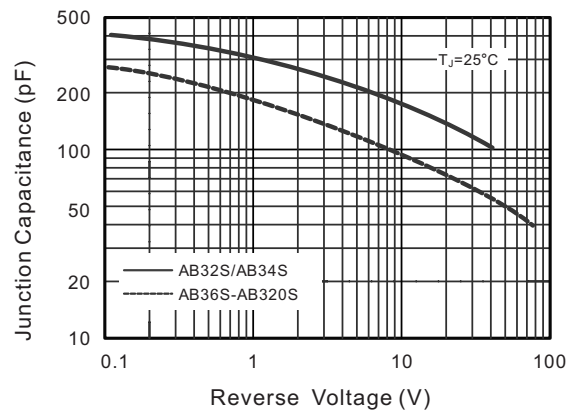


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current

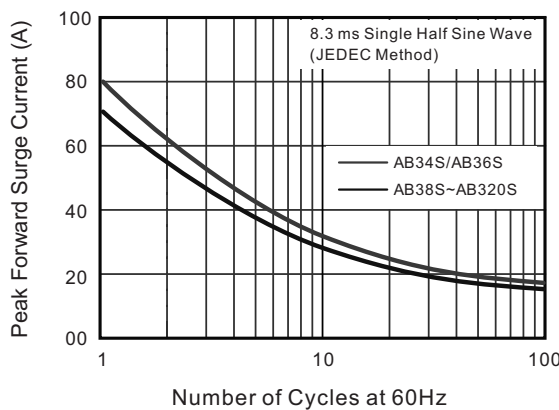

The curve above is for reference only.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bridge Rectifiers](#) category:

Click to view products by [Microdiode Electronics](#) manufacturer:

Other Similar products are found below :

[MB2510](#) [MB252](#) [MB356G](#) [MB358G](#) [MP358-BP](#) [90MT160KPBF](#) [GBJ1504-BP](#) [GBU10B-BP](#) [GBU15J-BP](#) [GBU15K-BP](#) [GBU4A-BP](#)
[GBU4D-BP](#) [GSIB680-E3/45](#) [DB101-BP](#) [DF01](#) [DF10SA-E345](#) [BU1508-E3/45](#) [BU1510-E3/45](#) [KBPC50-10S](#) [RS405GL-BP](#) [26MT120](#)
[G5SBA60-E3/51](#) [GBJ1502-BP](#) [GBU10J-BP](#) [GBU4J-BP](#) [GBU6M](#) [GBU8D-BP](#) [GBU8J-BP](#) [GSIB1520-E3/45](#) [TB102M](#) [MB1510](#) [MB6M-G](#)
[MB86](#) [TL401G](#) [MDA920A2](#) [TU602](#) [TU810](#) [MP501W-BP](#) [MP502-BP](#) [BR1005-BP](#) [BR101-BP](#) [BR84DTP204](#) [BU1010A-E3/51](#) [BU1508-](#)
[E3/51](#) [BU2006-E3/45](#) [BU2008-E3/51](#) [US15KB80R-7000](#) [KBPC25-02](#) [VS-60MT120KPBF](#) [DB105-BP](#)