




HIGH EFFICIENCY RECTIFIERS

Features

DO-15 ROHS COMPLIANT

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ High speed switching for high efficiency
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed:
250°C/10 seconds, 0.375"(9.5mm) lead length, 5 lbs.
(2.3kg) tension

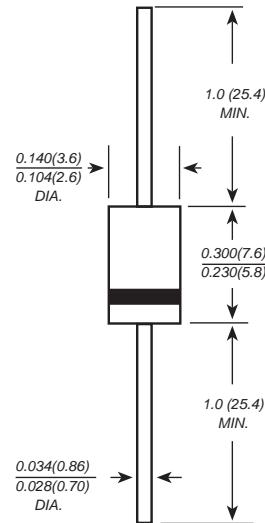**Mechanical Data****Case :** JEDEC DO-15 Molded plastic body**Terminals :** Solder plated, solderable per MIL-STD-750, Method 2026**Polarity :** Polarity symbol marking on body**Mounting Position :** Any**Weight :** 0.014 ounce, 0.40 grams

Dimensions in inches and (millimeters)

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

parameter	SYMBOLS	HER 201	HER 202	HER 203	HER 204	HER 205	HER 206	HER 207	HER 208	UNITS						
Marking code		MDD HER 201	MDD HER 202	MDD HER 203	MDD HER 204	MDD HER 205	MDD HER 206	MDD HER 207	MDD HER 208							
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	200	300	400	600	800	1000	V						
Maximum RMS voltage	V _{RMS}	35	70	140	210	280	420	560	700	V						
Maximum DC blocking voltage	V _{DC}	50	100	200	300	400	600	800	1000	V						
Maximum average forward rectified current 0.375"(9.5mm) lead length at TA=50°C	I _(AV)	2.0								A						
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	60.0								A						
Maximum instantaneous forward voltage at 2.0A	V _F	1.0		1.3		1.7				V						
Maximum DC reverse current TA=25°C at rated DC blocking voltage TA=100°C	I _R	5.0 100.0								µA						
Maximum reverse recovery time (NOTE 1)	t _{rr}	50		70						ns						
Typical junction capacitance (NOTE 2)	C _J	30.0		20.0						pF						
Typical thermal resistance (NOTE 3)	R _{θJA}	50.0								°C/W						
Operating junction and storage temperature range	T _J , T _{STG}	-65 to +150								°C						

Note: 1. Reverse recovery condition I_F=0.5A, I_R=1.0A, I_{rr}=0.25A

2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

3. Thermal resistance from junction to ambient at 0.375"(9.5mm) lead length, P.C.B. mounted



Ratings And Characteristic Curves

AVERAGE FORWARD RECTIFIED CURRENT,
AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE



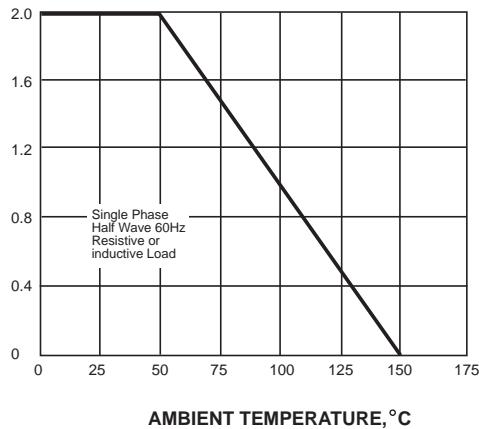


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

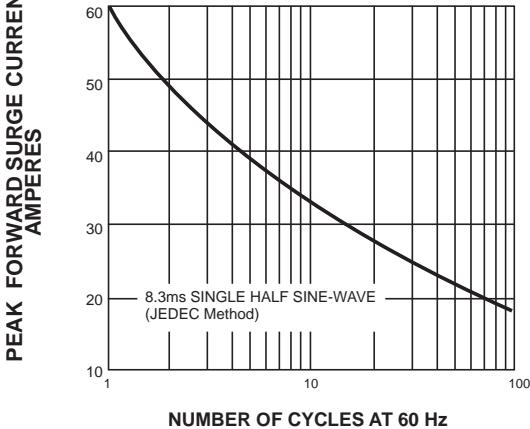


INSTANTANEOUS FORWARD
CURRENT, AMPERES

FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

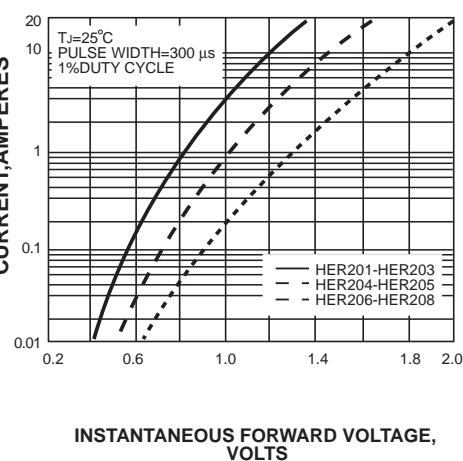


INSTANTANEOUS REVERSE CURRENT,
MICROAMPERES

FIG. 4-TYPICAL REVERSE CHARACTERISTICS

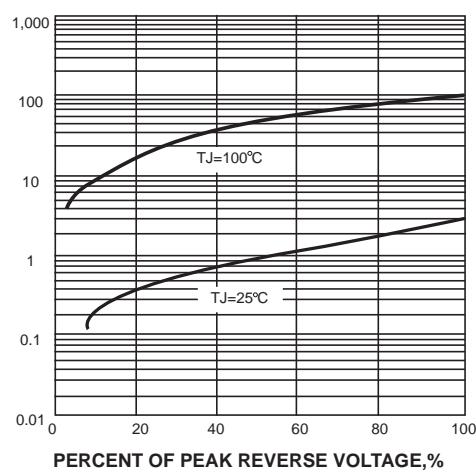


JUNCTION CAPACITANCE, pF

FIG. 5-TYPICAL JUNCTION CAPACITANCE

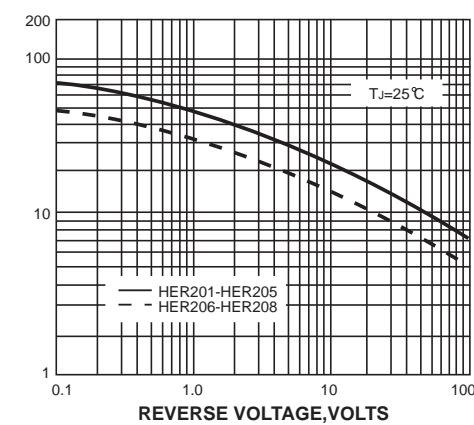

TRANSIENT THERMAL IMPEDANCE,
°C/W

FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

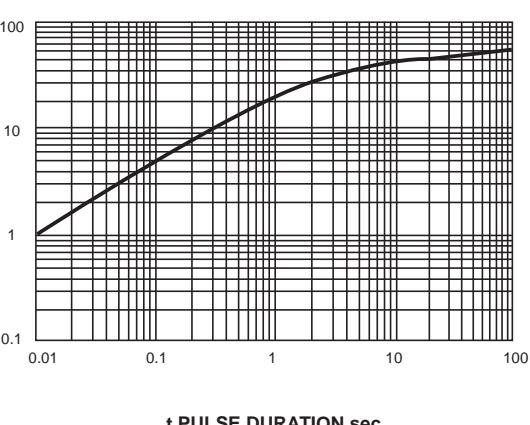

The curve above is for reference only.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Rectifiers category:

Click to view products by Microdiode Electronics manufacturer:

Other Similar products are found below :

[70HFR40](#) [FR105 R0](#) [RL252-TP](#) [150KR30A](#) [1N5397](#) [1N4002G](#) [1N4005-TR](#) [UFS120Je3/TR13](#) [JANS1N6640US](#) [481235F](#)
[RRE02VS6SGTR](#) [067907F](#) [MS306](#) [70HF40](#) [T110HF60](#) [T85HFL60S02](#) [US2JFL-TP](#) [A1N5404G-G](#) [CRS12\(T5L,TEMQ\)](#) [ACGRB207-HF](#)
[CLH07\(TE16L,Q\)](#) [CLH03\(TE16L,Q\)](#) [ACGRC307-HF](#) [ACEFC304-HF](#) [NTE6356](#) [NTE6359](#) [85HFR60](#) [40HFR60](#) [70HF120](#) [85HFR80](#)
[D126A45C](#) [SCF7500](#) [D251N08B](#) [SCHJ22.5K](#) [SM100](#) [SCPA2](#) [SDHD5K](#) [ACGRA4001-HF](#) [ACURA107-HF](#) [D1821SH45T PR](#) [D1251S45T](#)
[NTE6358](#) [NTE5850](#) [NTE5819](#) [NTE5837](#) [NTE5892](#) [NTE5900](#) [NTE5911](#) [NTE5915](#) [NTE5921](#)