



# MBR2020CT THRU MBR20100CT

Reverse Voltage - 20 to 100 Volts Forward Current - 20.0 Ampere


## SCHOTTKY BARRIER RECTIFIER

### Features

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Construction utilizes void-free molded plastic technique
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 250°C, 0.25" (6.35mm) from case for 10 seconds

### Mechanical Data

**Case** : JEDEC TO-220AB Molded plastic body  
**Terminals** : Solder plated, solderable per MIL-STD-750, Method 2026  
**Polarity** : Polarity symbol marking on body  
**Mounting Position** : Any  
**Weight** : 0.080 ounce, 2.24 grams

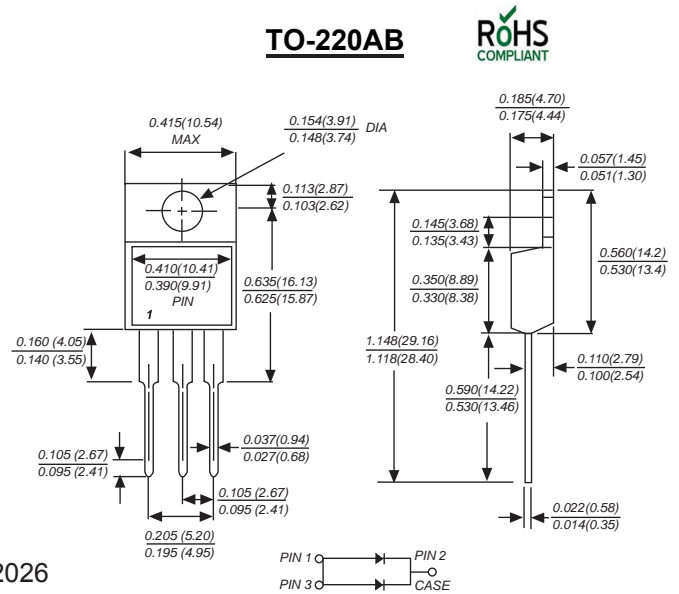

### Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	MBR 2020CT	MBR 2030CT	MBR 2040CT	MBR 2045CT	MBR 2050CT	MBR 2060CT	MBR 2070CT	MBR 2080CT	MBR 2090CT	MBR 20100CT	UNITS
		MDD MBR 2020CT	MDD MBR 2030CT	MDD MBR 2040CT	MDD MBR 2045CT	MDD MBR 2050CT	MDD MBR 2060CT	MDD MBR 2070CT	MDD MBR 2080CT	MDD MBR 2090CT	MDD MBR 20100CT	
Maximum repetitive peak reverse voltage	$V_{RRM}$	20	30	40	45	50	60	70	80	90	100	V
Maximum RMS voltage	$V_{RMS}$	14	21	28	32	35	42	49	56	63	70	V
Maximum DC blocking voltage	$V_{DC}$	20	30	40	45	50	60	70	80	90	100	V
Maximum average forward rectified current (see fig.1)	$I_{AV}$	20.0										A
Peak forward surge current 8.3ms single half sine-wave	$I_{FSM}$	150										A
Maximum instantaneous forward voltage at 10.0A	$V_F$	0.55			0.75			0.85			V	
Maximum DC reverse current at rated DC blocking voltage	$I_R$	1.0										mA
$T_A=25^\circ C$ $T_A=100^\circ C$		15.0					50.0					
Typical junction capacitance (NOTE 1)	$C_J$	550					450					pF
Typical thermal resistance (NOTE 2)	$R_{\theta JC}$	2.0										°C/W
Operating junction temperature range	$T_J$	-50 to +125					-50 to +150					°C
storage temperature range	$T_{STG}$	-50 to +150										°C

**Note:** 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2. Thermal resistance from junction to case.




# MBR2020CT THRU MBR20100CT

Reverse Voltage - 20 to 100 Volts Forward Current - 20.0 Ampere

## Ratings And Characteristic Curves

AVERAGE FORWARD RECTIFIED CURRENT, AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

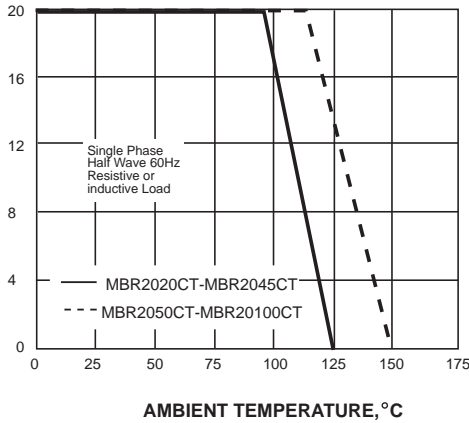

PEAK FORWARD SURGE CURRENT, AMPERES

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT



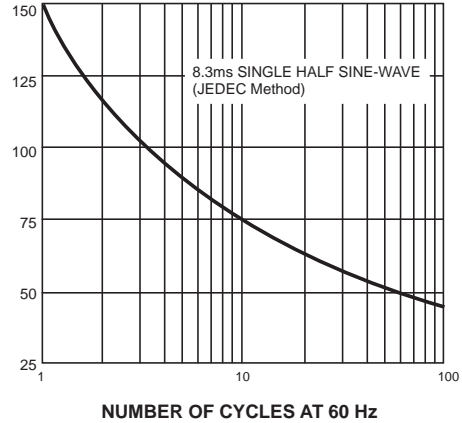


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

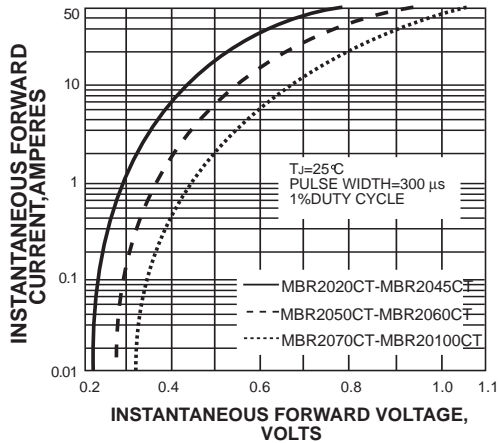


INSTANTANEOUS REVERSE CURRENT, MILLIAMPERES

FIG. 4-TYPICAL REVERSE CHARACTERISTICS

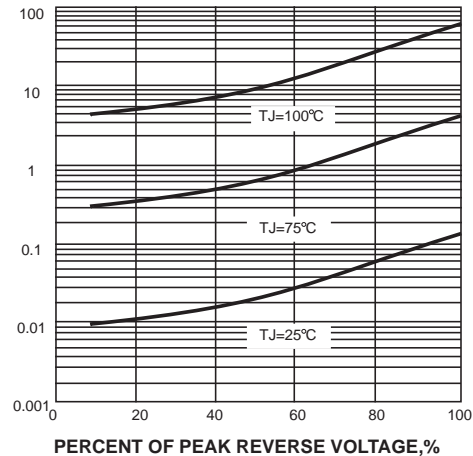


JUNCTION CAPACITANCE, pF

FIG. 5-TYPICAL JUNCTION CAPACITANCE

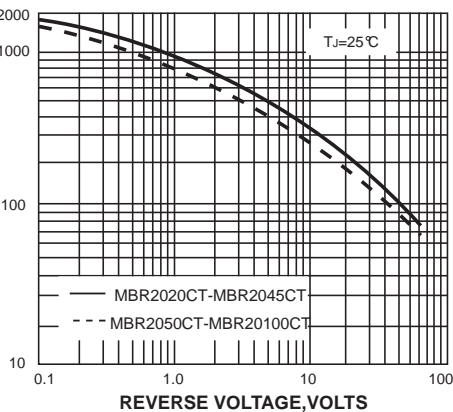

TRANSIENT THERMAL IMPEDANCE, °C/W

FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

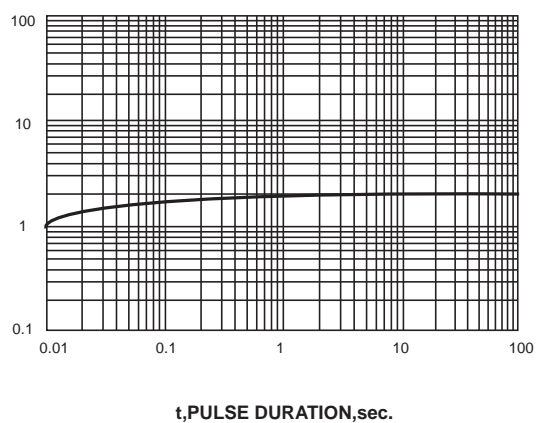

The curve above is for reference only.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Schottky Diodes & Rectifiers](#) category:*

*Click to view products by [Microdiode Electronics](#) manufacturer:*

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [GS1JE-TP](#) [RB160M-50TR](#) [BAS16E6433HTMA1](#)  
[BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#)  
[SBS818-TL-E](#) [SK310-T](#) [SK33A-TP](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#) [MA4E2501L-1290](#)  
[MBRB30H30CT-1G](#) [DMJ3940-000](#) [SB007-03C-TB-E](#) [SK32A-TP](#) [SK33B-TP](#) [SK35A-TP](#) [SK38B-LTP](#) [SK38B-TP](#) [NRVBM120LT1G](#)  
[NTE505](#) [NTSB30U100CT-1G](#) [SS0503SH-TL-E](#) [VS-6CWQ10FNHM3](#) [CRG04\(T5L,TEMQ\)](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#)  
[ACDBA2100-HF](#) [ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [ACDBA260LR-HF](#) [ACDBA1100-HF](#) [MA4E2502L-1246](#)  
[10BQ060-M3/5BT](#) [NRVB130LSFT1G](#) [CRS08TE85LQM](#)