


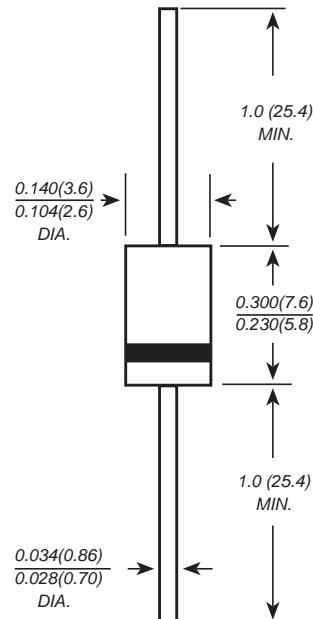

SUPER FAST RECTIFIERS

Features

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Idea for printed circuit board
- ◆ Super fast switching for high efficiency
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed:
250°C / 10 seconds at terminals

DO-15

Dimensions in inches and (millimeters)

Mechanical Data**Case :** JEDEC DO-15 Molded plastic body**Terminals :** Solder plated, solderable per MIL-STD-750, Method 2026**Polarity :** Polarity symbol marking on body**Mounting Position :** Any**Weight :** 0.014 ounce, 0.40 grams**Maximum Ratings And Electrical Characteristics**

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	SF21	SF22	SF23	SF24	SF25	SF26	SF28	UNITS		
Marking Code	MDD SF21	MDD SF22	MDD SF23	MDD SF24	MDD SF25	MDD SF26	MDD SF28				
Maximum repetitive peak reverse voltage	V _{RMM}	50	100	150	200	300	400	600	V		
Maximum RMS voltage	V _{RMS}	35	70	105	140	210	280	420	V		
Maximum DC blocking voltage	V _{DC}	50	100	150	200	300	400	600	V		
Maximum average forward rectified current at T _A =55°C	I _(AV)	2.0							A		
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	50.0							A		
Maximum instantaneous forward voltage at 2.0A	V _F	0.95			1.25	1.7			V		
Maximum DC reverse current TA=25°C at rated DC blocking voltage TA=100°C	I _R	5.0 50.0							µA		
Maximum reverse recovery time (NOTE 1)	trr	35							ns		
Typical junction capacitance (NOTE 2)	C _J	60.0		30.0					pF		
Typical thermal resistance (NOTE 3)	R _{θJA}	50.0							°C/W		
Operating junction and storage temperature range	T _{J,T_{STG}}	-65 to +150							°C		

Note: 1.Reverse recovery condition I_F=0.5A,I_R=1.0A,I_{rr}=0.25A

2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.


3. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted



Ratings And Characteristic Curves


AVERAGE FORWARD RECTIFIED CURRENT,
AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

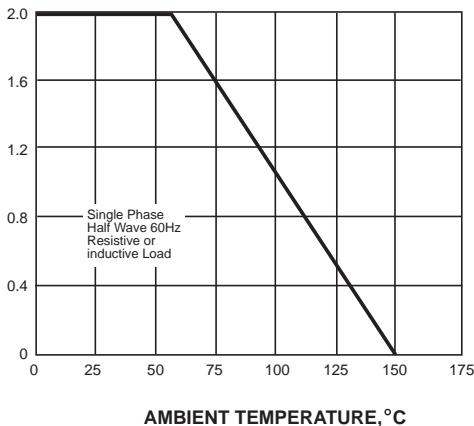

PEAK FORWARD SURGE CURRENT,
AMPERES


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

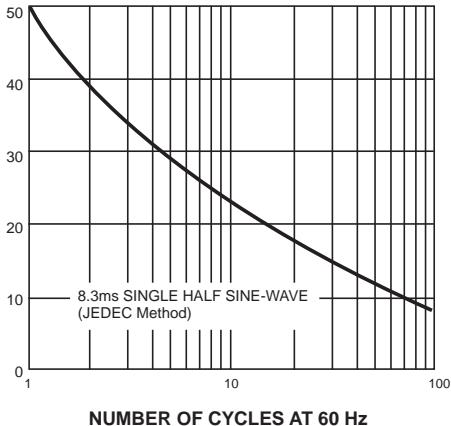

NUMBER OF CYCLES AT 60 Hz

INSTANTANEOUS FORWARD
CURRENT, AMPERES


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

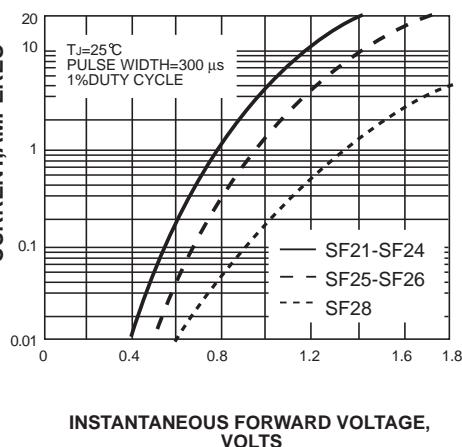

INSTANTANEOUS FORWARD VOLTAGE,
VOLTS

INSTANTANEOUS REVERSE CURRENT,
MICROAMPERES


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

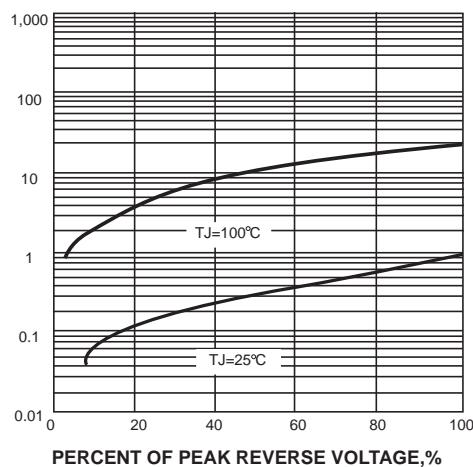

PERCENT OF PEAK REVERSE VOLTAGE, %

JUNCTION CAPACITANCE, pF


FIG. 5-TYPICAL JUNCTION CAPACITANCE

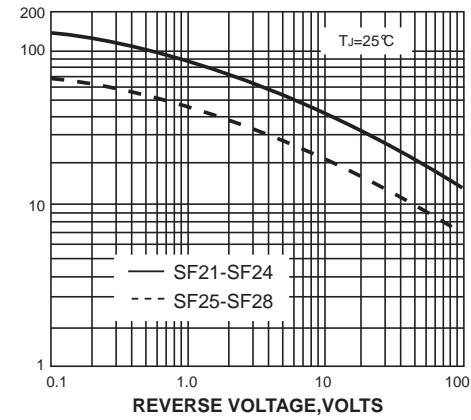

REVERSE VOLTAGE, VOLTS

TRANSIENT THERMAL IMPEDANCE,
°C/W

FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

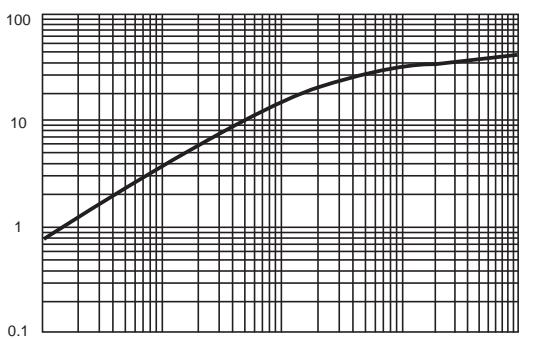

t, PULSE DURATION, sec.

The curve above is for reference only.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Rectifiers category:

Click to view products by Microdiode Electronics manufacturer:

Other Similar products are found below :

[70HFR40](#) [FR105 R0](#) [RL252-TP](#) [150KR30A](#) [1N5397](#) [1N4002G](#) [1N4005-TR](#) [UFS120Je3/TR13](#) [JANS1N6640US](#) [481235F](#)
[RRE02VS6SGTR](#) [067907F](#) [MS306](#) [70HF40](#) [T110HF60](#) [T85HFL60S02](#) [US2JFL-TP](#) [A1N5404G-G](#) [CRS12\(T5L,TEMQ\)](#) [ACGRB207-HF](#)
[CLH07\(TE16L,Q\)](#) [CLH03\(TE16L,Q\)](#) [ACGRC307-HF](#) [ACEFC304-HF](#) [NTE6356](#) [NTE6359](#) [85HFR60](#) [40HFR60](#) [70HF120](#) [85HFR80](#)
[D126A45C](#) [SCF7500](#) [D251N08B](#) [SCHJ22.5K](#) [SM100](#) [SCPA2](#) [SDHD5K](#) [ACGRA4001-HF](#) [ACURA107-HF](#) [D1821SH45T PR](#) [D1251S45T](#)
[NTE6358](#) [NTE5850](#) [NTE5819](#) [NTE5837](#) [NTE5892](#) [NTE5900](#) [NTE5911](#) [NTE5915](#) [NTE5921](#)