




Part Number: **MS-065060-2**





Revision 2021-Dec-01 - Generated 2021-Dec-01

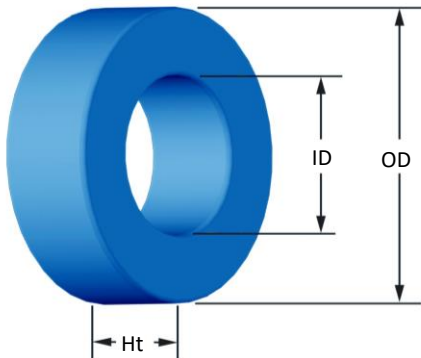

(If coated, Max./Min. includes coating)

OD	(nom. - bare core) (max.)	16.64 mm 17.40 mm	0.655 in 0.685 in
ID	(nom. - bare core) (min.)	10.16 mm 9.53 mm	0.400 in 0.375 in
HT	(nom. - bare core) (max.)	6.35 mm 7.11 mm	0.250 in 0.280 in
Mass	(approximate)	4.6 grams	
Magnetic Dimensions	A _e - Eff. Mag. Cross Section	0.192 cm ²	
	L _e - Eff. Mag. Path Length	4.11 cm	
	V _e - Eff. Core Volume	0.789 cm ³	
	WA - Min. Eff. Window Area	0.713 cm ²	
	sa - Surface Area	11.2 cm ²	
	mlt - mean length per turn	2.69 cm	
Inductance	μ _i (reference)	60	
	A _L value (nominal)	35 nH/N ²	
	Test Winding	N=70, #28 AWG	
	Frequency	10 kHz	
	Voltage on Agilent 4284A	0.060 V	
	AL tolerance	±8%	
Core Loss	$\text{Core Loss (mW/cm}^3\text{)} = \frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}} + d \cdot B_{pk}^2 \cdot f^2$		
	where B _{pk} expressed in gauss, f expressed in hertz, and: a=7.890E+09, b=7.111E+08, c=8.980E+06, d=2.846E-14		
	B _{pk}	1000 G	
	frequency	50 kHz	
	Core Loss (nominal)	323 mW/cm ³	
	Core Loss (maximum)	372 mW/cm ³	
DC Saturation	$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$		
	where H expressed in oersteds, and: a=1.000E-02, b=2.151E-06, c=1.841, d=0.000		
	H _{dc}	100 Oe	
	Percent Initial Perm(nom.)	49.2%	
	Percent Initial Perm(min.)	40.9%	
Coating/Pkg	Coating Type:	Blue Epoxy	
	Voltage Breakdown (min.)	1000 Vrms	
	Limit	0.1 mA, 5 s	
	Package Quantity	2,880 Pcs/Box	

Winding Table	Wire Size	AWG	12	14	16	18	20	22	24	26	28	30	32
		mm	2.000	1.600	1.250	1.000	0.800	0.630	0.500	0.400	0.315	0.250	0.200
	Single Layer	Turns	10	13	17	21	27	34	44	55	69	86	108
		Rdc(Ω)	1.4 m	2.9 m	6.0 m	11.8 m	24.1 m	48.3 m	99.4 m	197.7 m	394.4 m	781.8 m	1.6
Full Winding	Turns	9	14	21	33	51	79	123	190	295	456	706	
	Rdc(Ω)	1.3 m	3.1 m	7.4 m	18.5 m	45.6 m	112.3 m	278.0 m	682.9 m	1.7	4.1	10.2	

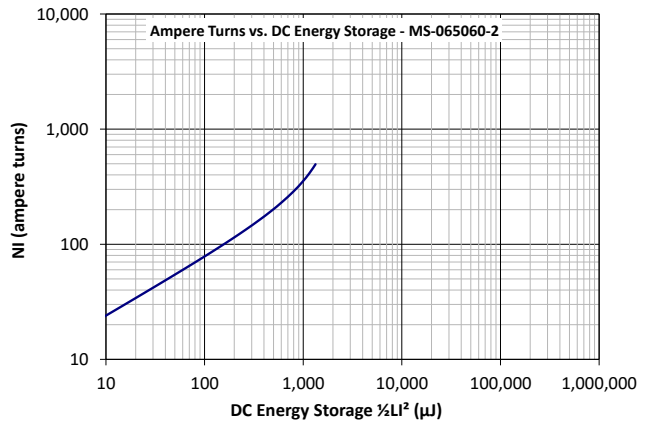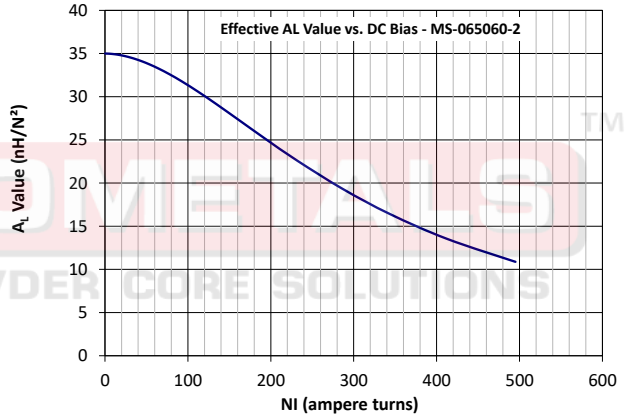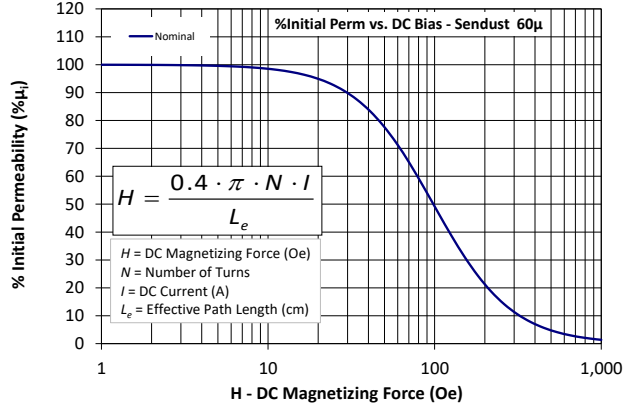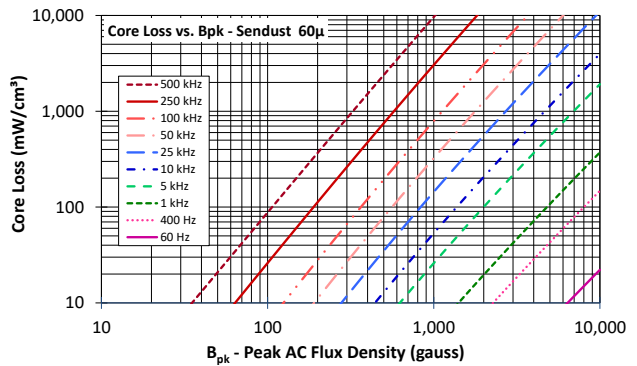

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ferrite Toroids / Ferrite Rings](#) category:

Click to view products by [Micrometals](#) manufacturer:

Other Similar products are found below :

[432202094771](#) [432202130672](#) [4327 018 35221](#) [432703013571](#) [4327 030 57161](#) [432703057191](#) [432202101631](#) [4327 030 57111](#) [5343232001](#)
[5977004801](#) [5976000201](#) [XRRH3.5*3.2*1.6](#) [XRRH4*2*2](#) [XRRH3.5*6*1.0](#) [XRRH3.5*6*1.5](#) [XRRH3.5*3.5*1.8](#) [XRR4*12](#) [XRRH6*3*3](#)
[XRRH3.5*4*1.0](#) [XRR3*12](#) [XRRH3.5*9*1.0](#) [XRRH3.5*5*1.8](#) [XRR4*10](#) [XRRH3.5*9.0*1.5](#) [XRRH3.5*3.5*1.5](#) [XRRH3.5*5*1.5](#)
[XRRH3.5*2*1.8](#) [XRRH3.5*3*1.5](#) [XRRH4*6*2](#) [XRRH3.5*3*1.8](#) [F9-BP RH 3.5*6*1.5](#) [F9-BP T 3.5*3*1.5](#) [F9-BP RH 3.5*4*1.5](#) [F9-AP RH](#)
[3.5*5*1.5](#) [XRR4*20](#) [XRRH4*10*2](#) [XRRH5*3*3](#) [F9-BP RH 3.5*9*1.5](#) [XRRH9.5*19.5*5](#) [XRRH7.8*12.7*4.5](#) [XRRH12*15*7.2](#)
[XRRH9*16*5](#) [XRRH12*20*6.5](#) [XRR6*25](#) [XRR8*20](#) [XRRH14.2*20*8](#) [XRRH14.2*28.5*6.35](#) [XRR8*30](#) [XRRH10.5*20*5.5](#)
[XRRH10.5*20*6.5](#)