

4N47U**4N48U****JAN, JANTX, JANTXV, AND JANS OPTOCOUPERS****4N49U**

06/23/03

Features:

- Certified to MIL-PRF-14500/548
- High reliability
- Base lead provided for conventional transistor biasing
- Very high gain, high voltage transistor
- Hermetically sealed for reliability and stability
- Stability over wide temperature range
- High voltage electrical isolation

Applications:

- Line Receivers
- Switchmode Power Supplies
- Signal ground isolation
- Process Control input/output isolation

DESCRIPTION

Very high gain optocoupler utilizing GaAlAs infrared LED optically coupled to an N-P-N silicon phototransistor packaged in a hermetically sealed 6-pin leadless chip carrier. The **4N47U**, **4N48U** and **4N49U** optocouplers can be supplied to customer specifications as well as JAN, JANTX, JANTXV, and JANS quality levels.

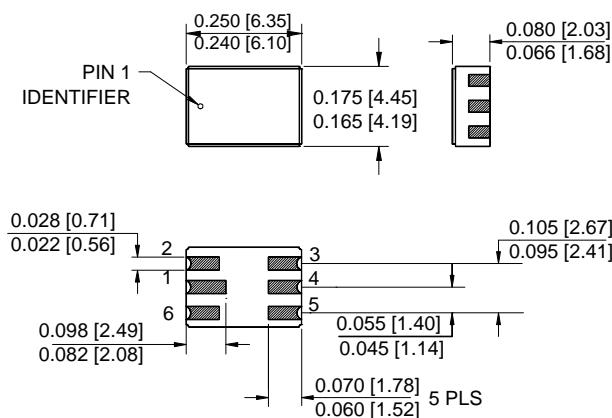
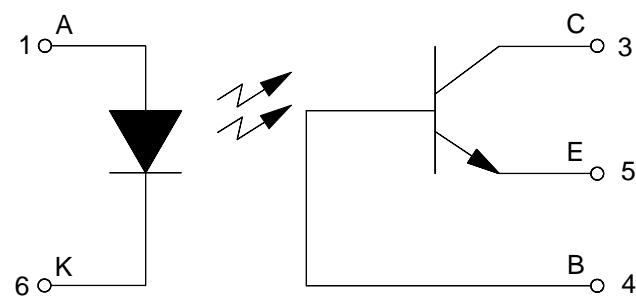
***ABSOLUTE MAXIMUM RATINGS**

Input to Output Voltage	1kV
Collector-Base Voltage	45V
Collector-Emitter Voltage	40V
Emitter-Base Voltage	7V
Input Diode Reverse Voltage	2V
Input Diode Continuous Forward Current at (or below) 25°C Free-Air Temperature (see note 1)	40mA
Continuous Collector Current	50mA
Peak Diode Current (Value Applies for $t_w \leq 1 \mu\text{s}$, PRR < 300pps)	1A
Continuous Transistor Power Dissipation at (or below) 25°C Free-Air Temperature (see Note 2)	300mW
Operating Free-Air Temperature Range.....	-55°C to +125°C
Storage Temperature.....	-65°C to +125°C
Lead Temperature (10 seconds maximum)	240°C

Notes:

1. Derate linearly to 125°C free-air temperature at the rate of 0.40 mA/°C.
2. Derate linearly to 125°C free-air temperature at the rate of 3 mW/°C.

* JEDEC registered data

Package Dimensions**Schematic Diagram**

ALL DIMENSIONS ARE IN INCHES [MILLIMETERS]

4N47U, 4N48U, and 4N49U**JAN, JANTX, JANTXV, AND JANS OPTOCOUPPLERS**

06/23/03

ELECTRICAL CHARACTERISTICS $T_A = 25^\circ C$ Unless otherwise specified

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS	NOTE
Input Diode Static Reverse Current	I_R			100	NA	$V_R = 2V$	
Input Diode Static Forward Voltage							
-55°C		1.0		1.7			
+25°C	V_F	0.8	1.4	1.5	V	$I_F = 10mA$	
+100°C		0.7		1.3			

OUTPUT TRANSISTOR $T_A = 25^\circ C$ Unless otherwise specified

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS	NOTE
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	45			V	$I_C = 100\mu A, I_E = 0, I_F = 0$	
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	40			V	$I_C = 1mA, I_B = 0, I_F = 0$	
Emitter-Collector Breakdown Voltage	$V_{(BR)EBO}$	7			V	$I_C = 0, I_B = 100\mu A, I_F = 0$	

COUPLED CHARACTERISTICS $T_A = 25^\circ C$ Unless otherwise specified

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS	NOTE
On State Collector Current	4N47U		0.5		MA		
	4N48U	$I_{C(ON)}$	1.0			$V_{CE} = 5V, I_B = 0, I_F = 1mA$	
	4N49U		2.0				
On State Collector Current	4N47U		0.7		MA		
-55°C	4N48U	$I_{C(ON)}$	1.4			$V_{CE} = 5V, I_B = 0, I_F = 2mA$	
	4N49U		2.8				
On State Collector Current	4N47U		0.5		MA		
+100°C	4N48U	$I_{C(ON)}$	1.0			$V_{CE} = 5V, I_B = 0, I_F = 2mA$	2
	4N49U		2.0				
Off State Collector Current	+25°C	$I_{C(OFF)}$		100	NA	$V_{CE} = 20V, I_B = 0, I_F = 0mA$	
Off State Collector Current	+100°C	$I_{C(OFF)}$		100	μA	$V_{CE} = 20V, I_B = 0, I_F = 0mA$	
Collector-Emitter Saturation Voltage	4N47U	$V_{CE(SAT)}$		0.3	V	$I_C = 0.5mA, I_B = 0, I_F = 2mA$	
	4N48U	$V_{CE(SAT)}$		0.3	V	$I_C = 1mA, I_B = 0, I_F = 2mA$	
	4N49U	$V_{CE(SAT)}$		0.3	V	$I_C = 2mA, I_B = 0, I_F = 2mA$	
Input to Output Resistance	R_{I-O}	10^{11}				$V_{IN-OUT} = 1kV$	1
Input to Output Capacitance	C_{I-O}			5	PF	$f = 1MHz, V_{IN-OUT} = 1kV$	1
Rise Time/ Fall Time	4N47U	t_r / t_f		20	μs		
Phototransistor Operation	4N48U	t_r / t_f		25	μs	$V_{CC} = 10V, I_F = 10mA, R_L = 100\Omega$	
	4N49U	t_r / t_f		25	μs		
Rise Time/ Fall Time	4N47U	t_r / t_f		0.85	μs		
Photodiode Operation	4N48U	t_r / t_f		0.85	μs	$V_{CC} = 10V, I_F = 10mA, R_L = 100\Omega$	
	4N49U	t_r / t_f		0.85	μs		

NOTES:

- These parameters are measured between all phototransistor leads shorted together and with both input diode leads shorted together.
- This parameter measured using pulse techniques $t_w = 100\mu s$, duty cycle $\leq 1\%$.

RECOMMENDED OPERATING CONDITIONS:

PARAMETER	SYMBOL	MIN	MAX	UNITS
Input Current, Low Level	I_{FL}	0	100	μA
Input Current, High Level	I_{FH}	2	10	mA
Supply Voltage	V_{CE}	5	10	V

SELECTION GUIDE

PART NUMBER	PART DESCRIPTION
4N47U	Commercial
4N48U	Commercial
4N49U	Commercial
JAN4N47U	JAN Screened
JAN4N48U	JAN Screened
JAN4N49U	JAN Screened
JANTX4N47U	JANTX Screened
JANTX4N48U	JANTX Screened
JANTX4N49U	JANTX Screened
JANTXV4N47U	JANTXV Screened
JANTXV4N48U	JANTXV Screened
JANTXV4N49U	JANTXV Screened
JANS4N47U	JANS Screened
JANS4N48U	JANS Screened
JANS4N49U	JANS Screened

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Transistor Output Optocouplers](#) category:

Click to view products by [Micropac manufacturer](#):

Other Similar products are found below :

[LTV-814S-TA](#) [LTV-815S-TA](#) [LTV-8241S](#) [LTV-824HS](#) [LTV-852S](#) [66095-001](#) [6N136-X017T](#) [6N136-X019T](#) [MCT6-X007](#) [MCT6-X007T](#)
[MOC8101-X009](#) [MOC8101-X017T](#) [PS2561-1-A](#) [PS2561A-1-W-A](#) [PS2561B-1-L-A](#) [PS2561DL-1Y-V-A](#) [PS2561L1-1-A](#) [PS2561L-1-V-A](#)
[PS2581AL2-A](#) [PS2706-1-A](#) [PS2815-1-A](#) [MRF658](#) [ELD207\(TA\)](#) [IL755-1X007](#) [IL755-2](#) [ILD2-X006](#) [ILD74-X001](#) [ILQ615-2X017](#) [ILQ615-3X016](#)
[LDA102S](#) [LDA110S](#) [LDA202](#) [SFH601-4X007T](#) [SFH615A-2X009T](#) [SFH615A-4X001](#) [SFH615AGR-X007T](#) [SFH618A-3X006](#)
[SFH620A-2X007](#) [SFH690BT3](#) [PS2561-1-V-W-A](#) [PS2561A-1-V-A](#) [PS2561AL1-1-V-A](#) [PS2561AL-1-H-A](#) [PS2561AL-1-V-A](#) [PS2561BL-1-F3-Q-A](#) [PS2561DL-1Y-F3-A](#) [PS2561L1-1-L-A](#) [PS2561L1-1-V-Q-A](#) [PS2562-1-V-A](#) [PS2565L-1-A](#)