



SANTA ANA, CA

For more information call:
 (714) 979-8220

FEATURES

- HIGH CONDUCTANCE
- EXTREMELY LOW REVERSE CURRENT
- ULTRA-STABLE OPERATION UP TO +150°C
- VOIDLESS HERMETICALLY SEALED GLASS PACKAGE
- JANS/TX/TXV TYPES AVAILABLE PER MIL-S-19500-241
- METALLURGICALLY BONDED

MAXIMUM RATINGS

Operating Temperature: -65°C to +150°C

Storage Temperature: -65°C to +200°C

Surge Current: 4 Amps

ELECTRICAL CHARACTERISTICS

TYPE	FORWARD VOLTAGE DROP $V_F @ I_F$		FORWARD CURRENT I_F	REVERSE CURRENT (MAX) $I_R @ 125V$		REVERSE RECOVERY (MAX) t_{rr}	JUNCTION CAPACITANCE (MAX) $C @ 0V$
	VOLTS			nA			
	MIN	MAX		25°C	125°C		
1N3595	.83	1.00	200	1.0	500	300	8.0
	.79	.92	100	1.0		300	8.0
	.74	.88	50	1.0		300	8.0
	.65	.80	10	1.0	3μA	300	8.0
	.60	.75	5	1.0	@	300	8.0
	.52	.68	1	1.0	150°C	300	8.0

GENERAL PURPOSE DIODES

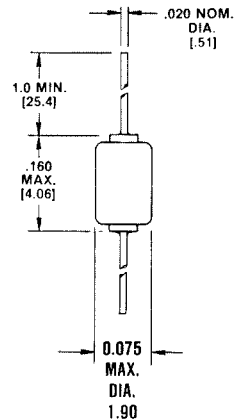


FIGURE 1
 PACKAGE D035

MECHANICAL CHARACTERISTICS

CASE: Hermetically sealed glass case.

LEAD MATERIAL: Tinned copper clad steel.

MARKING: Body painted, alpha numeric.

POLARITY: Cathode band.

1N3595

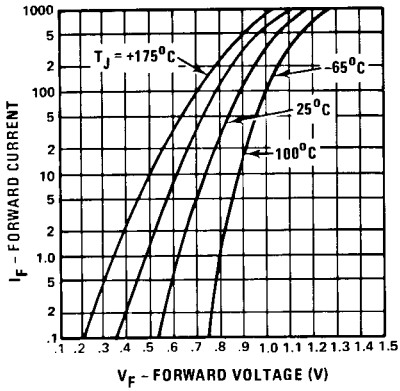


FIGURE 2
TYPICAL FORWARD VOLTAGE VS.
FORWARD CURRENT

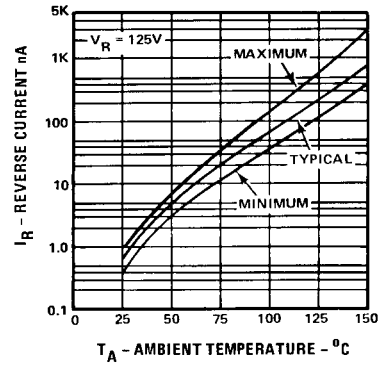


FIGURE 3
REVERSE CURRENT VS.
AMBIENT TEMPERATURE

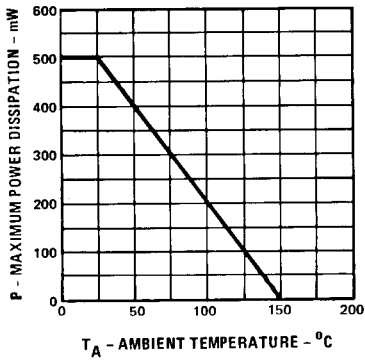


FIGURE 4
POWER DERATING CURVE

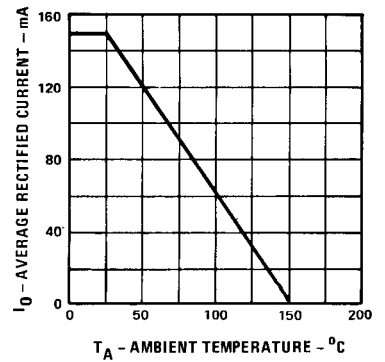


FIGURE 5
AVERAGE RECTIFIED CURRENT
VS. AMBIENT TEMPERATURE

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Rectifiers](#) category:

Click to view products by [Microsemi](#) manufacturer:

Other Similar products are found below :

[70HFR40](#) [RL252-TP](#) [150KR30A](#) [1N5397](#) [NTE5841](#) [NTE6038](#) [SCF5000](#) [1N4002G](#) [1N4005-TR](#) [JANS1N6640US](#) [481235F](#)
[RRE02VS6SGTR](#) [067907F](#) [MS306](#) [70HF40](#) [T85HFL60S02](#) [US2JFL-TP](#) [A1N5404G-G](#) [ACGRA4007-HF](#) [ACGRB207-HF](#)
[CLH03\(TE16L,Q\)](#) [ACGRC307-HF](#) [ACEFC304-HF](#) [NTE6356](#) [NTE6359](#) [NTE6002](#) [NTE6023](#) [NTE6039](#) [NTE6077](#) [85HFR60](#) [40HFR60](#)
[70HF120](#) [85HFR80](#) [D126A45C](#) [SCF7500](#) [D251N08B](#) [SCHJ22.5K](#) [SM100](#) [SCPA2](#) [SCH10000](#) [SDHD5K](#) [VS-12FL100S10](#) [ACGRA4001-](#)
[HF](#) [D1821SH45T PR](#) [D1251S45T](#) [NTE5990](#) [NTE6358](#) [NTE6162](#) [NTE5850](#) [SKN300/16](#)