




8700 E. Thomas Road
 Scottsdale, AZ 85251
 Tel: (480) 941-6300
 Fax (480) 947-1503

S16-4148, e3
 and
S16-4150, e3
Switching Diode Array



FEATURES

- 8 Diode Array
- SOIC 16 pin Surface Mount Package
- UL 94V-0 Flammability Classification
- RoHS compliant by adding "e3" suffix (S16-4148e3 or S16-4150e3)


MECHANICAL and PACKAGING

- Molded SOIC 16 Pin
- Terminals: Tin-Lead or RoHS compliant annealed matte Tin
- Weight: 0.128 grams (approximate)
- Marking: Logo, device part number, date code
- Pin #1 defined by DOT on top of package
- Tape & Reel option: Standard per EIA-481-B
 13 inch reel 2,500 pieces (add "TR" suffix to part number)
- Carrier tube 48 pcs per (STANDARD)

MAXIMUM RATINGS


- Operating Temperatures: -55°C to +150°C
- Storage Temperature: -55°C to +150°C
- Forward Surge Current: 2.0 Amps (8.3 ms)
- Working Peak Reverse Voltage V_{RWM} : 75 V for S16-4148 and 50 V for S16-4150
- Continuous forward current I_F : 400 mA (each diode)
- Power dissipation (P_D): 1500 mW (total package)

CIRCUIT DIAGRAM

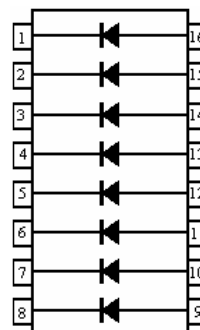

ELECTRICAL CHARACTERISTICS @ 25°C Unless otherwise specified

Part Number	$V_{BR} @ I_{BR}$ =100µA		I_R +25°C		I_R 150°C		CAP @ 0V pF		t_{rr}	
	V MIN	V MAX	µA MAX	V@Vr	µA MAX	@Vr	MAX pF	MAX (ns)		
S16-4148	90		.025 .500	20 75	50 100	20 50	4.0		5.0	
S16-4150	75		.1	50	100	50	2.5		4.0	
Part Number	V_F @ $I_F = 1.0$ mA		V_F @ $I_F = 10$ mA		V_F @ $I_F = 50$ mA		V_F @ $I_F = 100$ mA		V_F @ $I_F = 200$ mA	
	V MIN	V MAX	V MIN	V MAX	V MIN	V MAX	V MIN	V MAX	V MIN	V MAX
S16-4148	-----	-----	-----	100	-----	-----	-----	1.20	-----	-----
S16-4150	0.54	0.62	0.66	0.74	0.76	0.86	0.82	0.92	0.87	1.00

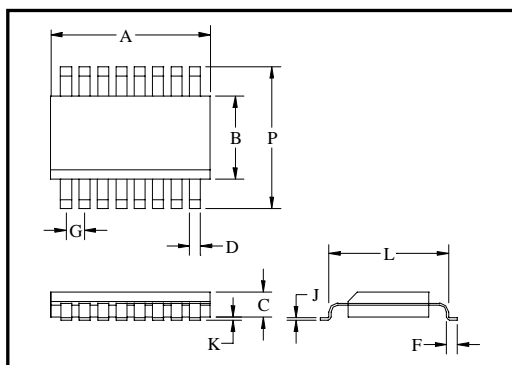

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.385	0.398	9.09	10.10
B	0.150	0.158	3.81	4.01
C	0.053	0.069	1.35	1.75
D	0.011	0.021	0.28	0.53
F	0.016	0.050	0.41	1.27
G	0.050 BSC		1.27 BSC	
J	0.006	0.010	0.15	0.25
K	0.004	0.010	0.10	0.20
L	0.189	0.206	4.80	5.23
P	0.228	0.244	5.79	6.19

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Diodes - General Purpose, Power, Switching category:](#)

Click to view products by [Microsemi manufacturer:](#)

Other Similar products are found below :

[RD0306T-H](#) [BAQ33-GS18](#) [BAV17-TR](#) [BAV19-TR](#) [1N3611](#) [NTE156A](#) [NTE525](#) [NTE571](#) [NTE574](#) [NTE5804](#) [NTE5806](#) [NTE6244](#)
[1SS181-TP](#) [1SS193,LF](#) [1SS400CST2RA](#) [SDAA13](#) [SHN2D02FUTW1T1G](#) [LS4151GS08](#) [1N4449](#) [1N456A](#) [1N4934-E3/73](#) [1N914B](#)
[1N914BTR](#) [RFUH20TB3S](#) [BAS 28 E6327](#) [BAV199-TP](#) [BAW56DWQ-7-F](#) [BAW75-TAP](#) [MM230L-CAA](#) [IDW40E65D1](#) [JAN1N3600](#)
[LL4151-GS18](#) [053684A](#) [SMMSD4148T3G](#) [707803H](#) [SP000010217](#) [ACDSW4448-HF](#) [CDSZC01100-HF](#) [BAV199E6433HTMA1](#)
[BAV70M3T5G](#) [SMBT2001T1G](#) [NTE5801](#) [NTE5800](#) [NTE5808](#) [NTE6240](#) [NTE6248](#) [DLM10C-AT1](#) [BAS28-7](#) [BAW56HDW-13](#) [BAS28](#)
[TR](#)