



### DESCRIPTION

This document describes and specifies the electrical and mechanical characteristics of the SGE2658-1G high voltage transformer for CCFL inverter power supplies. SGE2658-1G is the RoHS compliant and Lead free transformer. For Reliability and Safety Specification, refer to SGE2606-3.


### ELECTRICAL CHARACTERISTICS

Items	Inductance (@ 10Khz, 0.1V)			Items	DC. Resistance			
	Min	Nom	Max		Min	Nom	Max	
L2-3, L3-4 ( $\mu$ H)	418	500	567	$R_{DC2-3}, R_{DC3-4}(m\Omega)$	435	463	490	
L6-7 (mH)	1024	1213	1396	$R_{DC6-7} (\Omega)$	350	361	390	
$L_{LKG2-3}, L_{LKG3-4} (\mu H)$	27	28.5	30	$R_{DC2-3} / R_{DC3-4}$	0.96	1	1.04	
$L_{LKG6-7}$ (mH)	NA	NA	NA	Secondary Self Capacitance ( HP4192A 1MHz C meter, 30mVrms)	C <sub>6-7</sub> (pF)	2.0	2.5	3.5
<b>Rating</b>								
Note: Max output power varies depend on operating condition.								
Max Open Output Voltage	1500V <sub>RMS</sub> , 3sec.		60Hz, Arc-detect enabled, 5 sec. min. 200 $\mu$ A max. leakage current		Secondary to Core	2000V <sub>RMS</sub> min. (60sec)		
Max Output Voltage	1000V <sub>RMS</sub>		Primary to Core		1000V <sub>RMS</sub> min.			
Max Output Power	4W		Primary to Secondary		1000V <sub>RMS</sub> min.			

### WINDING SPECIFICATIONS

	Primary		Secondary
	Pin 2 – 3	Pin 3 – 4	Pin 6 – 7
Winding Sequence	2S – 3F	3S – 4F	6S – 7F
Wire Size & Type	#34, Single Insulation, 180°C	#34, Single Insulation, 180°C	#46, Triple Insulation, 180°C
Number of Turns	31	31	1600
Winding Method	Bifilar		

### PHYSICAL SPECIFICATIONS & WIRING DIAGRAM

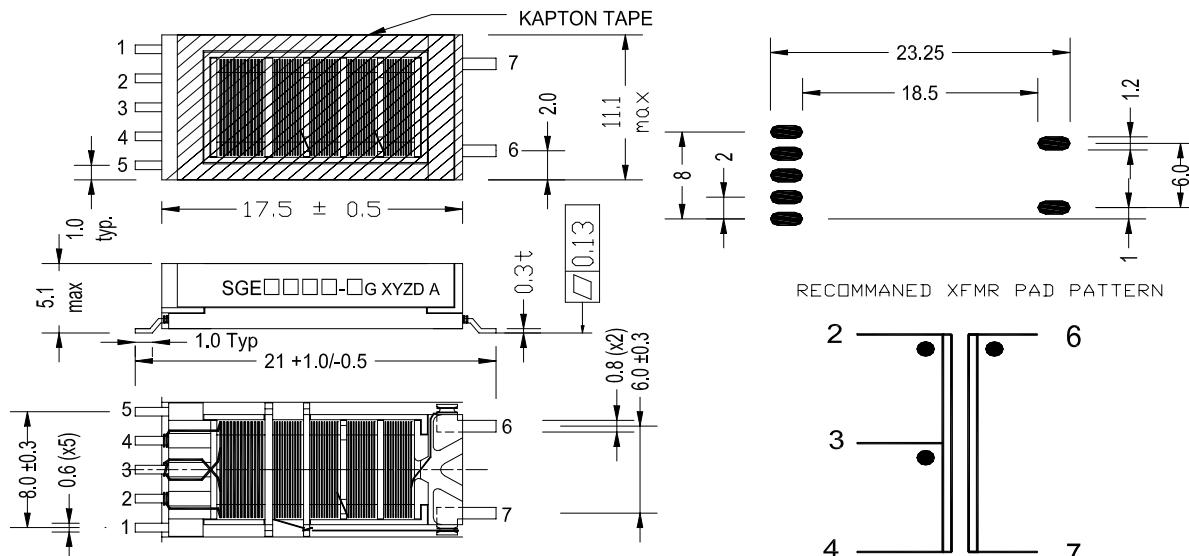

Note : This Transformer is designed for single ended application. Pin 7 must be connected to low voltage side or ground.

### PART MARKING

SGE□□□□-□G XYZD A – SGE2658-1G: MSC PN, XYZ: Datecode (X:YR, YZ=WK), D: Plant Code, A: Rev.#

### PACKAGING SPEC AND ORDER INFORMATION

Packaging Order Information – SGE2658-1G ( Standard for TRAY)  
SGE2658-1GTR (Tape and Reel )

TAPE & REEL : Refer to SGE2604-3 specification



# Microsemi®

Specification Number  
**SGE2658-1G**  
Revision. A (090605)

**4W LMT2110 25.8:1 Transformer**

## NOTES

[www.Microsemi.com](http://www.Microsemi.com)

NOTES

PRODUCTION DATA – Information contained in this document is proprietary to Microsemi and is current as of publication date. This document may not be modified in any way without the express written consent of Microsemi. Product processing does not necessarily include testing of all parameters. Microsemi reserves the right to change the configuration and performance of the product and to discontinue product at any time.

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for microsemi manufacturer:***

Other Similar products are found below :

[DS31407GN+](#) [APT100GF60JU3](#) [APT2X101DL40J](#) [APT2X31D60J](#) [APT2X60D100J](#) [APT35GA90BD15](#) [APT36GA60BD15](#)  
[APTC60HM35T3G](#) [ARF477FL](#) [MT90869AG2](#) [1N5280B](#) [1N5663A](#) [1N5772](#) [1N6317](#) [1N6467](#) [JAN1N6461](#) [JANTX1N6462US](#) [SG2842M](#)  
[1N6311US](#) [1N6663US](#) [APT30M19JVFR](#) [Core429-SA](#) [M2S025-VFG400](#) [AX2000-FG896](#) [JAN2N3439](#) [JANTX1N5651A](#)  
[JANTX1N5804US](#) [MSD75-08](#) [SG3524D](#) [SM64TQ-ACTEL-1](#) [SM68P-ACTEL](#) [VSC8514XMK-11](#) [AGL1000V2-CS281I](#) [AGL400V2-](#)  
[FGG144](#) [APT50GF120JRDQ3](#) [APT2X100D100J](#) [APT10025JVFR](#) [APA300-CQ208B](#) [APT8014L2FLLG](#) [1N5711UBD](#) [1N6336US](#) [AFS600-](#)  
[FG256I](#) [AX500-FGG484I](#) [A3PE3000L-1FG896I](#) [SG3526BN](#) [BR230-290B2-28V-021M](#) [A3P030-QNG68I](#) [A2F500M3G-FGG256](#)  
[JANTX1N827-1](#) [JANTX1N6638U](#)