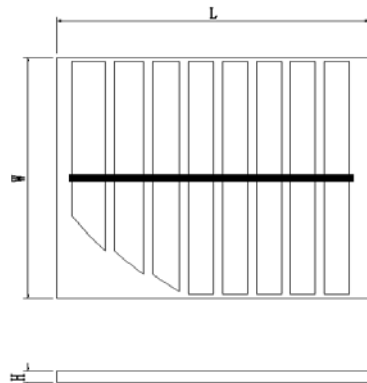


SOLAR PANEL SPECIFICATION

P/N: SW0.4M

Maximum power voltage:4.0V Maximum power current: 100.0mA Dimension: 70*65*3.2mm

1. Outline View:

Outline Dimensions		
L	70±0.2mm	
W	65±0.2mm	
H	3.2±0.3mm	

2. Technical characteristics

(STC Standard Testing Condition: 1000W/M² AM1.5, 25°C.)

Description of Goods	Technical Spec.
Open Circuit Voltage(Voc)	4.6V ± 8%
Short Circuit Current (Isc)	105mA ± 8%
Maximum Power Voltage(Vmp)	4.0V ± 8%
Maximum Power Current(Imp)	100.0mA ± 8%
Maximum Power(Ppm)	0.4W ± 8%

3. Mechanical Characteristics

- ① Monocrystalline Silicon solar cells
- ② Encapsulated: PC film lamination

4. Quality Assurance

- ① 3-year limited, work temperature: -10°C-50°C

5. Notes

- ① This product couldn't be contacted directly with strong corrosive substances.
- ② To be avoid to scratch the surface.
- ③ This product couldn't be born bending force during transportation & assembling.

Date:	
Made by:	
Confirm:	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Solar Panels & Solar Cells](#) category:

Click to view products by [MikroElektronika](#) manufacturer:

Other Similar products are found below :

[AM-1606C-MEL](#) [200](#) [2747](#) [SC10050](#) [FIT0601](#) [SC20072](#) [SC20050](#) [SC20036](#) [SC10036](#) [AM-1513CA](#) [AM-1719CA](#) [AM-1805CA](#) [AM-1820CA](#) [500](#) [1525](#) [3809](#) [MIKROE-651](#) [AM-1417CA](#) [AM-1454CA](#) [AM-1456CA](#) [AM-1801CA](#) [AM-1815CA](#) [AM-1816CA](#) [AM-1819CA](#) [AM-5608CAR](#) [AM-5610CAR](#) [AM-5706CAR](#) [AM-5902CAR](#) [AM-5904CAR](#) [AM-8702CAR](#) [AT-7665A](#) [LL200-2.4-75](#) [LL200-3-37](#) [LL200-3.6-75](#) [LL200-4.8-37](#) [MP3-25](#) [MP3-37](#) [MP7.2-150F](#) [MP7.2-75F](#) [MPT15-150](#) [MPT15-75](#) [MPT3.6-150](#) [MPT3.6-75](#) [MPT4.8-150](#) [MPT4.8-75](#) [MPT6-150](#) [MPT6-75](#) [P7.2-150F](#) [P7.2-75F](#) [PT15-150](#)