



A new idea is just a click away

Adding a new functionality to your design was never so easy. Sensors? Displays? Wireless transceivers? Motor control? Connection ports? Encoders? Or how about speech recognition, thunder detection, fingerprint scanning?

Pick from hundreds of Click boards[™] - presented here in 1:1 scale - plug one into the mikroBUS[™] socket, and it's ready to work right away.







Click boards™

Ever-growing range of standardized add-on boards

WiFi, LoRa, BLE, GSM, GPS, OLED, speech recognition, environmental sensors, movement sensors, biosensors, LEDs, ADCs, relays - you name it, we got it. There are hundreds of Click boards available.



3G Click (USA)

5V 3.3V SPI I2C
UART GPIO PWM AN

UG95 3G UMTS/HSPA module. With SIM card slot, Audio/Mic jack, micro USB port.

MSRP - \$89 MIKROE-2296



3G Click (EU/AUS)

5Va 3.3V SPI I2C
UART GPIO PWM AN

UG95 3G UMTS/HSPA module. With SIM card slot, Audio/Mic jack, micro USB port.

MSRP - \$89⁰⁰ MIKROE-2226



3G SARA Click

5V 3.3V SPI I2C

UART GPIO PWM AN

With UMTS/HSPA cellular modem – the u-blox U201, from the SARA series.

MSRP - \$99^{ut} MIKROE-2244



4G LTE-E Click

5V 3.3V SPI I2C

UART GPIO PWM AN

It features the LARA-R211 multimode cellular module from u-blox.

MSRP - \$115⁰⁰ MIKROE-2527



4G LTE-NA Click

5V 3.3V SPI I2C UART GPIO PWM AN

It features the LARA-R204 multimode cellular module from u-blox.

MSRP - \$11500 MIKROE-2535



6LoWPAN C Click

5V 3.3V SPI 12C UART GPIO PWM AN

TI's CC2520, 2,4GHz ZiqBee®/IEEE 802.15.4 RF transceiver.



6LoWPAN T Click

5V 3.3V SPI 12C UART GPIO PWM AN

TI's CC2520, 2,4GHz ZigBee®/IEEE 802.15. RF transceiver.



BEE Click

5V 3.3V SPI 12C UART GPIO PWM AN

Microchip's MRF24J-40MA 2.4 GHz IEEE 802.15.4 radio transceiver module.

MIKROE-987



BLE 2 Click

5V 3.3V SPI 12C UART GPIO PWM AN

With RN4020 Bluetooth 4.1 module. Can be set up both as a client or a server.

MIKROE-1715



BLE 3 Click

5V 3.3V SPI 12C UART GPIO PWM AN

It features NI-NA-B1 Bluetooth 4.2 module from u-blox.



BLE P Click

5V 3.3V SPI 12C UART GPIO PWM AN

With nRF8001 Bluetooth 4.0 peripheral device. Open source Android app available.

MSRP - \$2500 MIKROE-1597



Bluetooth Click

5V 3.3V SPI 12C

UART GPIO PWM AN

It features the RN-41 low power, class 1 Bluetooth radio module.

MSRP - \$39° MIKROE-958



BT Audio Click

5V 3.3V SPI I2C
UART GPIO PWM AN

With RN52 Bluetooth audio module and onboard 3.5mm jacks for a mic and a speaker.

MSRP - \$49⁰⁰ MIKROE-2399



ccRF Click

5V 3.3V SPI 12C
UART GPIO PWM AN

With CC2500 low-power 2.4 GHz RF transceiver and PCB trace antenna.

MSRP - \$22⁰ MIKROE-1435



ccRF 2 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

With CC1120, high performance radio transceiver for ISRM and SRD bands.

MSRP - \$3600 MIKROE-1716



ccRF 3 Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

Carries the CC1120 high-performance RF transceiver for narrowband systems from TI.



EnOcean Click

5V 3.3V SPI 12C UART GPIO PWM: AN

With TCM 310 transceiver - bidirectional gateway for EnOcean's 868 MHz radio systems.

MIKROE-1908



EnOcean 2 Click

5V 3.3V SPI 12C UART GPIO PWM: AN

With TCM 515Z transceiver, based on the 2.4 GHz IEEE 802.15.4 radio standard.

MIKROE-2521



GNSS Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

Quectel's L86 GNSS module with a patch antenna and an external antenna connector.

MIKROE-1850



GNSS 2 Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

Quectel's L76 module and SMA antenna connector. GPS + GLONASS.



GNSS 3 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Carries SIM33ELAGNSS module with an integrated antenna and an external antenna connector.

MSRP - \$390 MIKROE-1895



GNSS 4 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

It features SAM-M8Q patch antenna module from u-blox.

MSRP – \$44⁰¹ MIKROE-2045



GNSS 5 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

It features NEO-M8N GNSS receiver module from u-blox.

MSRP - \$41⁰⁰ MIKROE-2670



GPS Click

5V 3.3V SPI I2C
UART GPIO PWM AN

It carries LEA-6S high-performance position engine from u-blox.

MSRP - \$49⁰⁰ MIKROE-1032



GPS 3 Click

5V 3.3V SPI I2C

UART GPIO PWM AN

With Quectel's L80, high-sensitivity GPS module with a patch antenna.

MSRP - \$44⁰⁰ MIKROE-1714



GSM-GPS Click

5V 3.3V SPI I2C

UART GPIO PWM AN

With SIM808, GSM/GPRS and GPS module. Two antenna connectors, SIM card slot, a micro USB connector.

MSRP - \$85° MIKROE-2382



GSM Click

5V 3.3V SPI I2C
UART GPIO PWM AN

With quad-band GL865-QUAD GSM/ GPRS module, onboard antenna connector and SIM card socket.

MSRP - \$490 MIKROE-1298



GSM 2 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

With Quectel's M95 FA quad-band GSM/GPRS module. 85.6 kbps GPRS data transfer.

MSRP - \$44⁰⁰ MIKROE-1375



GSM 3 Click

5V 3.3V SPI I2C

UART GPIO PWM AN

With SIM800H quadband GSM/GPRS module. 85.6 kbps GPRS data transfer.

MSRP - \$5/00 MIKROE-1720



GSM/GNSS Click

5V 3.3V SPI I2C

UART GPIO PWM AN

Quectel's MC60 quadband GSM/GPRS/GNSS module. GPS/GNASS location tracking with GSM.

MSRP - \$79⁰⁰ MIKROE-2439



GSM/GNSS 2 Click

5V 3.3V SPI I2C

UART GPIO PWM AN

With SIM868 quadband GSM/GPRS module. GPS/GNASS location tracking with GSM.

MSRP - \$690 MIKROE-2440



IQRF Click

5V 3.3V SPI 12C
UART GPIO PWM AN

With DCTR-76DA RF transceiver, operating in the 868/916 MHz frequency.

MSRP - \$4300 MIKROE-2586




IQRF 2 Click

5V 3.3V SPI 12C
UART GPIO PWM AN

With DCTR-72DAT RF transceiver, operating in the 868/916 MHz frequency.

MSRP - \$4900 MIKROE-2587



IR Beacon Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Functions as a beacon device with nine VSMB-2948SL high speed infrared emitting diodes.

MSRP - \$21' MIKROE-1939



IR Click

 5V
 3.3V
 SPI
 I2C

 UART
 GPIO
 PWM
 AN

Features TSOP38338 IR 38 kHz receiver module as well as QEE113 IR emitting diode.

MSRP - \$9⁵⁰ MIKROE-1377



IrDA2 Click

5V 3.3V SPI I2C

UART GPIO PWM AN

With TFDU4101 infrared transceiver module and MCP2120 infrared encoder/decoder.

MSRP - \$25°C MIKROE-1195



LoRa RF Click

5V 3.3V SPI I2C

UART GPIO PWM AN

With RN2483 LoRa Sub-GHz, 433/868 MHz European R&TTE Directive Assessed Radio Modern.

MSRP - \$540 MIKROE-1997



LoRa RF 2 Click

5V 3.3V SPI I2C UART GPIO PWM AN

With RN2903 915 MHz Radio Modem compliant with regulations for use in the USA, CA, AU, NZ.

MSRP - \$54⁰⁰ MIKROE-2225



LoRa 3 Click

5V 3.3V SPI I2C

UART GPIO PWM AN

A LoRa technology-based SRD transceiver, operates at a sub-gigahertz frequency of 868MHz.

MSRP - \$5200 MIKROE-2933



LoRa 4 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

A LoRa RF technology based SRD transceiver, operates at a sub-gigahertz frequency of 868MHz.

<mark>(SRP – \$52</mark>00 IIKROE-2934



NFC Tag Click

5V 3.3V SPI I2C
UART GPIO PWM AN

With M24SR64 NFC/RFID tag IC with a dual interface and 8KB of high-reliability EEPROM built-in.

MSRP - \$1201 MIKROE-1726



NFC Tag 2 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Carries NT3H1101 NTAG I2C energy harvesting NFC Forum Type 2 Tag from NXP.

MSRP - \$1200 MIKROE-2462



nRF C Click

5V 3.3V SPI 12C
UART GPIO PWM AN

With nRF24L01P 2.4 GHz transceiver. Air data rates of 250 Kbps, 1 Mbps and 2 Mbps.

MSRP - \$19° MIKROE-1304



nRF S Click

5V 3.3V SPI 12C
UART GPIO PWM AN

With nRF24L01P 2.4 GHz transceiver. 250 Kbps, 1 Mbps and 2 Mbps air data rates.

MSRP - \$19⁰⁰ MIKROE-1836



nRF T Click

5V 3.3V SPI 12C
UART GPIO PWM AN

With nRF24L01P 2.4 GHz transceiver module. Air data rates of 250 Kbps, 1 Mbps and 2 Mbps.

MSRP - \$1600 MIKROE-1305



RFid Click

5V 3.3V SPI I2C

UART GPIO PWM AN

With CR95HF 13.56 MHz contactless RFid transceiver, and trace antenna.

MSRP - \$2900 MIKROE-1434



NFC Click

5V 3.3V SPI I2C
UART GPIO PWM AN

With near field communications controller PN7120 IC from NXP.

MSRP - \$34⁰⁰ MIKR0E-2395



RN4678 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

It carries RN4678 Bluetooth® 4.2 dual mode module from Microchip.

MSRP - \$29° MIKROE-2545



RN4870 Click

5V 3.3V SPI I2C

UART GPIO PWM AN

It carries RN4870 Bluetooth® 4.2 low energy module from Microchip.

MSRP - \$33° MIKROE-2543



RN4871 Click

5V 3.3V SPI I2C

UART GPIO PWM AN

It carries RN4871 Bluetooth® 4.2 low energy module from Microchip.

MSRP - \$33° MIKROE-2544



tRF Click

5V 3.3V SPI I2C UART GPIO PWM AN

With Telit's LE70-868

— a 868 MHz transceiver module with embedded stack.

MSRP - \$59° MIKROE-1535



WiFi 2 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

With HLK-M30 module. Can be set up with either a static or dynamic IP address.

MSRP - \$2900 MIKROE-1768



WiFi 3 Click

5V 3.3V SPI I2C UART GPIO PWM AN

With ESP8266 module. TCP/IP stack. Supports Wi-Fi Direct [p2p]. 6 GPIO pins.

MSRP - \$27⁰¹ MIKROE-1769



WiFi 4 Click

5V 3.3V SPI I2C

UART GPIO PWM AN

With SPWF01SA standalone WiFi module. Built-in 2.45 GHz ISM band antenna.

MSRP - \$49 MIKROE-1913



WiFi 5 Click

5V 3.3V SPI I2C

UART GPIO PWM AN

With Gainspan's GS1500M 802.11b/g/n Low Power Wi-Fi module with a PCB trace antenna.

ISRP - \$29⁰⁰ IKROE-2274



WiFi 6 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

With WF121-A self-contained WiFi module. 2.4GHz band IEEE 802.11 b/g/n radio.

MSRP - \$6900 MIKROE-2043



WiFi 7 Click

5V 3.3V SPI 12C
UART GPIO PWM AN

With ATWINC1510-MR210PB IEEE 802.11 b/g/n module, 20MHz solution.

MSRP - \$2901 MIKROE-2046



WiFi ESP Click

5V 3.3V SPI I2C

UART GPIO PWM AN

With ESP-WROOM-02 module that integrates ESP8266EX. In AP WiFi and WiFi client mode.

MSRP - \$15⁰⁰ MIKROE-2542



WiFi PLUS Click

5V 3.3V SPI I2C

UART GPIO PWM AN

With MRF24WB-OMA 2.4GHz, IEEE std. 802.11 module and MCW1001 controller.

MSRP - \$45° MIKROE-1135



WiFly Click

5V 3.3V SPI I2C

UART GPIO PWM AN

With RN-131 embedded wireless LAN module. Qualified 2.4-GHz IEEE 802.11 b/g transceiver.

MSRP - \$690 MIKROE-1937



AnyNet 2G Click

5V 3.3V SPI I2C
UART GPIO PWM AN

WiFi module with integrated IPv4 TCP/IP stack and built-in network protocols.

MSRP - \$6900 MIKROE-2747





AnyNet 3G-EA Click

5V 3.3V SPI I2C
UART GPIO PWM AN

A secure connection with the AWS over the air (OTA), by utilizing the Quectel UG95 3G module.

MSRP - \$89⁰⁰ MIKROE-2975

CC3100 Click

5V 3.3V SPI I2C

UART GPIO PWM AN

Carries low power, high security Wi-Fi CC3100 module. Support for 802.11n.

MSRP - \$49⁰⁰ MIKROE-2336



OOK RX Click

5V 3.3V SPI I2C
UART GPIO PWM AN

A wireless receiver that operates at the frequency of 433MHz [sub-GHz].

MSRP - \$19¹¹ MIKROE-2902



OOK TX Click

5V 3.3V SPI I2C
UART GPIO PWM AN

A wireless transmitter that operates at the frequency of 433MHz [sub-GHz].

MSRP - \$1900 MIKROE-2903



WiFi NINA Click

5V 3.3V SPI 12C UART GPIO PWM AN

A standalone WiFi module, with the stateof-the-art NINA-W132 module from u-blox.

MIKROE-2921



MiWi Click

5V 3.3V SPI 12C UART GPIO PWM AN

A subgigahertz radio transceiver which offers a reliable FSK or OOK communication solution.



MiWi 2 Click

5V 3.3V SPI 12C UART GPIO PWM AN

A subgigahertz radio transceiver which offers a reliable FSK or OOK communication solution.

MIKROE-2925



M-BUS RF Click

5V 3.3V SPI 12C UART GPIO PWM: AN

With ME70-169 RF wireless module. Unlicensed ISM frequency band 169.400-169.475 MHz.

MIKROE-2048



SPIRIT Click

5V 3.3V SPI 12C UART GPIO PWM AN

With SP1ML 868MHz ultra low-power RF module. Memory: 16 kB RAM and 128 kB Flash.

MIKROE-2568

MSRP - \$5400



XBEE Click

5V 3.3V SPI 12C
UART GPIO PWM AN

Xbee® and Zigbee-compliant XB-24CZ7PIS-004 module with a PCB antenna.

MSRP - \$590 MIKROE-1599



NANO GPS Click

 5V
 3.3V
 SPI
 I2C

 UART
 GPIO
 PWM
 AN

With Nano Hornet, world's smallest GPS module with an integrated antenna.

MSRP - \$45⁰⁰ MIKROE-1912



GPS 4 Click

5V 3.3V SPI I2C

UART GPIO PWM AN

GPS 4 click carries the L70 compact GPS module from Quectel, with external antenna.

MSRP - \$34⁰⁰ MIKROE-2704



GSM 4 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Compact quad-band GSM solution, featuring the quad-band SARA-G350 module.

MSRP - \$74⁰ MIKROE-2388



LTE IoT Click

5V 3.3V SPI I2C

UART GPIO PWM AN

Compact quad-band GSM solution, featuring the quad-band SARA-G350 module.

MSRP - \$79⁰⁰ MIKR0E-3072





5V 3.3V SPI I2C

UART GPIO PWM AN

Allows connection to the LTE networks, featuring Quectel BG96 LTE module.

MSRP - \$6900



SigFox Click

5V 3.3V SPI 12C UART GPIO PWM AN

Carries the SN10-11, a fully integrated Sigfox $^{\text{M}}$ certified module by InnoComm.

MSRP - \$250 MIKROE-2534



SigFox 2 Click

5V 3.3V SPI I2C

Carries the SN10-12, a fully integrated Sigfox[™] certified module by InnoComm.

MSRP - \$25⁰⁰ MIKROE-3039



,

SigFox 3 Click
5V 3.3V SPI 12C
UART GPIO PWM AN

Carries the SN10-13, a fully integrated Sigfox[™] certified module by InnoComm.

MSRP - \$2500 MIKROE-3163



NB IoT Click

5V 3.3V SPI I2C

UART GPIO PWM AN

Allows LTE Cat NB1 connectivity by utilizing Quectel BC95-G

MSRP - \$5200 MIKROE-3294



GeoMagnetic Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Measures the geomagnetic field in three perpendicular axes. The onboard sensor uses FlipCore from Bosch.

MSRP - \$1500 MIKROE-2935



IR Grid Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Equipped with the MLX90621BAD, a 16x4 IR array sensor, from Melexis.

MSRP - \$6900 MIKROE-2622



Moisture Click

5V 3.3V SPI I2C
UART GPIO PWM AN

FDC2112 IC, a very precise 12bit capacitance to digital converter, from Texas Instruments.

MSRP - \$19⁰⁰ MIKROE-3084




Opto Encoder Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Uses the TCUT1600X01, a tall dome dual channel transmissive optical sensor from Vishay.

MSRP - \$900 MIKROE-2549



RTD Click

5V 3.3V SPI 12C
UART GPIO PWM AN

It is based on MAX31865 resistance to digital converter optimized for RTDs.


MSRP - \$1900 MIKROE-2815



10D0F Click

5V 3.3V SPI 12C UART GPIO PWM AN

With BN0055, a 9-axis absolute orientation sensor and BMP180, a digital pressure sensor.



3D Hall Click

5V 3.3V SPI 12C UART GPIO PWM AN

With MLX90333 3-axis Hall sensor. Detects the position of any magnet in nearby space.

MSRP - \$2500 MIKROE-1987



3D Motion Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

MM7150 9-axis sensor fusion motion module and SSC7150 motion coprocessor.

MIKROE-1877



6DOF IMU Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

STM's LSM6DS33TR 6-axis IMU with 3-axis gyroscope and 3-axis accelerometer.

MIKROE-1298



6DOF IMU 2 Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

With BMI160 low power IMU. For precise acceleration and gyroscopic measurement.

MSRP - \$2400 MIKROE-2337



9DOF Click

5V	3.3V	SPI	I2C
• • • • • • • • • • • • • • • • • • • •			
UART	GPIO	:PWM	: AN

LSM9DS1 inertial measurement module - 3D accelerometer, gyroscope and magnetometer.

MSRP - \$2400 MIKROE-1941



Accel Click

5V	3.3V	SPI	I2C
UART	GPIO	PWM	AN

With ADXL345 3-axis accelerometer. 13-bit measurement, embedded FIFO technologies.

MSRP - \$1900 MIKROE-1194



Accel 2 Click

5V	3.3V	SPI	I2C
UARI	GPIO	:PWM	: AN

LIS3DSH IC 3-axis accelerometer. Embedded FIFO buffer and 2 programmable state machines.

MSRP - \$1900 MIKROE-1905



Accel 3 Click

5V	3.3V	SPI	I2C
UART	GPIO	PWM	AN

H3LIS331DL 3-axis linear accelerometer. Dynamically selectable scales ±100g/±200g/±400g.

MSRP - \$21 MIKROE-2102



Air quality Click

5V	3.3V	SPI	I2C
UART	:GPIO	PWM	AN

MQ-135 sensor for detecting gases - ammonia, nitrogen oxides, benzene, smoke, CO2.

MSRP - \$16⁵⁰ MIKROE-1630

Air quality 2 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

iAQ-Core that measures VOC levels and provides CO2 equivalent and TVOC equivalent predictions.

MSRP - \$7900 MIKROE-2529



Air quality 3 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Equipped with the CCS811, an ultra-low power digital gas sensor for monitoring the indoor air quality [IAQ].

MSRP - \$29⁰⁰ MIKROE-2953



Air quality 4 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

An advanced air quality sensing device that combines multiple metal-oxide sensing elements on a chip.

MSRP - \$320 MIKROE-2896



Air quality 5 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

MiCS-6814, a compact triple MOS sensor from SGX Sensortech, with three fully independent sensors.

MSRP - \$45⁰⁰ MIKROE-3056



Hydrogen Click

5V 3.3V SPI I2C UART GPIO PWM AN

It carries MQ-8 sensor for hydrogen (H2). Sensor's detection range 100-10000ppm of H2.

MSRP - \$15⁰¹ MIKROE-1629



Angle 3 Click

5V 3.3V SPI 12C UART GPIO PWM: AN

With AK7451, a magnetic rotational angle sensor with 12-bit angle resolution.

MSRP - \$1800



BAROMETER Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

LPS25HB IC, piezoresistive absolute pressure sensor. Range 260-1260 hPa.

MIKROE-1817



Bi Hall Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

US2882 bipolar Hall-effect switch and a 74LVC1T45 single bit, dual supply transceiver.

MIKROE-1646



CO Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

MQ-7 gas sensor with high sensitivity to carbon monoxide. Detection range 20ppm-2000ppm.

MIKROE-1626



Color Click

5V 3.3V SPI 12C UART GPIO PWM AN

With TCS3471 (RGBC) color light sensor and a RGB LED diode. Resolution up to 16-bits.



Color 2 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

ISL29125 RGB color light sensor. 16-bit resolution data, measuring range 5.7 mlux-10.000 lux.

MSRP - \$16⁰⁰ MIKROE-1988



Color 3 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

With TCS3771 color sensor and a narrow beam Infrared LED.

MSRP - \$17⁰¹ MIKROE-2103



Compass Click

5V 3.3V SPI I2C
UART GPIO PWM AN

It features LSM303DLHC ultra compact high performance e-compass module.

MSRP - \$25⁰⁰ MIKROE-1386



Compass 2 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

With AK8963 3-axis electronic compass based on the Hall effect. 14-/16-bit selectable resolution.

MSRP - \$25° MIKROE-2264




Current Click

 5V
 3.3V
 SPI
 I2C

 UART
 GPIO
 PWM
 AN

With INA196 current shunt monitor, MCP3201 12-bit ADC, MAX6106 voltage reference.

MSRP - \$240 MIKROE-1396



DHT22 Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

With DHT22 temp. and humidity measurement sensor. Hum. 0-100%. temp. -40 to +80° C.

MIKROE-1798



Diff pressure Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

MPXV5010DP pressure sensor. Designed for comparing 2 pressure measurements.

MIKROE-2387



Earthquake Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

It carries D7S, the world's smallest high-precision seismic sensor from Omron.

MIKROE-2561



ECG Click

5V 3.3V SPI 12C UART GPIO PWM: AN

It measures the electrical activity of a beating heart through electrodes taped to the skin.

MIKROE-2455



ECG 2 Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

Tracks the patterns of your beating heart. It carries ADS1194 16-bit delta-sigma ADC.



EMG Click

5V 3.3V SPI 12C UART GPIO PWM: AN

Measures the electrical activity produced by the skeletal muscles.

MIKROE-2621



Environment Click

UART: GPIO: PWM: AN

Measures temperature, relative humidity, pressure and Volatile Organic compounds gases.

MIKROE-2467



Fever Click

5V 3.3V SPI 12C UART GPIO PWM AN

Measures body temperature with MAX30205 sensor. Accuracy 0.1°C (37°C to 39°C).

MIKROE-2554



FLAME Click

5V 3.3V SPI 12C UART GPIO PWM AN

Used for fire detection. Carries PT334-6B silicon phototransistor sensitive only to infrared light.


MIKROE-1820



Force Click

5V 3.3V SPI 12C UART GPIO PWM AN

With Interlink Electronics' Force Sensing Resistors. Force sensitivity range 0.2N-20N.



Grid-EYE Click

5V 3.3V SPI 12C UART GPIO PWM AN

8x8 thermal array sensor-detector that carries AMG8853 infrared array sensor.



GYRO Click

5V 3.3V SPI 12C UART GPIO PWM AN

L3GD20 3-axis digital gyroscope module - can measure angular rate and ambient temperature.

MSRP - \$2500



Hall current Click

5V 3.3V SPI 12C UART GPIO PWM: AN

High precision current sensor with TLI4970-D050T4, a magnetic current sensor.

MIKROE-1578




HDC1000 Click

5V 3.3V SPI 12C UART GPIO PWM AN

It's a humidity (and temperature) measurement Click carrying the HDC1000 sensor.

MIKROE-1797



Heart rate Click

5V 3.3V SPI 12C UART GPIO PWM AN

With Maxim's MAX30100 integrated pulse oximetry and heart-rate sensor.

MSRP - \$1900 MIKROE-2000

Heart rate 3 Click

5V 3.3V SPI 12C UART GPIO PWM AN

SFH7050 pulse oximetry and heart rate monitoring module, and AFE4404 IC for bio-sensing.



Heart rate 4 Click

5V 3.3V SPI 12C UART GPIO PWM AN

Carrie the MAX30101 high-sensitivity pulse oximeter and heartrate sensor.

MIKROE-2510



Heart Rate 5 Click

5V 3.3V SPI 12C UART GPIO PWM AN

Uses the top-of-theclass integrated BIOFY® SFH 7072 sensor from OSRAM.

MSRP - \$3200 MIKROE-3012



Heart Rate 7 Click

5V 3.3V SPI 12C UART GPIO PWM AN

The VEMD8080 photosensor. A high-speed PD element, with sensitivity in the visible light spectrum.


MSRP - \$2300 MIKROE-2998



Illuminance Click

5V :3.3V: SPI : I2C UART: GPIO: PWM: AN

With TSL2561 light-todigital converter. Two photodiodes: full-spectrum and infrared light.



IR distance Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

With GP2Y0A60SZ0F distance measuring sensor. Measuring range 10-150 cm.



IR eclipse Click

5V 3.3V SPI 12C UART GPIO PWM: AN

With EE-SX198 photo interrupter sensor detects anything that obstructs its beam.

MIKROE-1711



IR reflect Click

5V 3.3V SPI 12C UART GPIO PWM AN

Carries GP2S700HCP reflective photo interrupter and an onboard potentiometer.

MIKROE-1882



IR Sense Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

With AK9750 quantumtype IR sensor. Detects the temperature of objects and people in motion.


MIKROE-2677



IrThermo Click 3.3V

5V 3.3V SPI 12C UART: GPIO: PWM: AN

With MLX90614ESF-BAA IR thermometer module, factory calibrated in wide temperature range.



IrThermo Click 5V

5V 3.3V SPI 12C UART GPIO PWM AN

With MLX90614ESF-AAA IR thermometer module, factory calibrated in wide temperature range.

MIKROE-1362



IrThermo 2 Click

5V 3.3V SPI 12C UART GPIO PWM AN

It is a non-contact temperature measurement solution, with an infrared thermopile sensor.

MSRP - \$2000 MIKROE-1888



LDC1000 Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

With inductance-to-digital converter IC and a detachable sensor. For short range inductive sensing.

MIKROE-1583



Light Click

5V 3.3V SPI 12C UART GPIO PWM AN

Used to measure ambient light intensity, with PD15-22CTR8 PIN photodiode.

MIKROE-1424



LightHz Click

5V 3.3V SPI 12C UART GPIO PWM AN

With TSL230BR converter for conversion of light intensity to frequency with no external components.



LightRanger Click

5V	3.3V	SPI	I2C
UART	GPIC	:PWM	: AN

It's a proximity sensor carrying VL6180X IC. Also works as an ambient light sensor.

MSRP - \$2400 MIKROE-1897



LightRanger 2 Click

5V	3.3V	SPI	I2C
UART	GPIO	PWM	AN

With VL53L0X IC, the world's smallest Timeof-Flight ranging and gesture detector sensor.

MSRP - \$24⁰⁰ MIKROE-2509



LIN HALL Click

5V	3.3V	SPI	12C
UART	GPIC	PWM	I: AN

Carries MLX90242 linear Hall sensor IC. Measures magnet's strength and distance.

MSRP - \$1700 MIKROE-1648



Line Follower Click

5V 3.3V SPI I2C
UART GPIO PWM AN

With five QRE1113 miniature reflective object sensors. Used for line following robots and cars.

MSRP - \$15⁰⁰ MIKROE-1999




LPG Click

5V 3.3V SPI I2C
UART GPIO PWM AN

With MQ-5 sensor for detecting liquefied petroleum gas leakage. Detection range 200-10000 ppm.

MSRP - \$1500 MIKROE-1587



LPS22HB Click

5V 3.3V SPI 12C UART GPIO PWM AN

Used as a digital barometer. It carries the LPS22HB MEMS nano pressure sensor.

MIKROE-2665



LSM303AGR Click

5V 3.3V SPI 12C UART GPIO PWM: AN

Measures acceleration and magnetic field characteristics, Carries LSM303AGR module.

MIKROE-2684



LSM6DSL Click

5V 3.3V SPI 12C UART GPIO PWM: AN

Measures linear and angular velocity with six degrees of freedom. Carries LSM6DSL module.

MIKROE-2731



MAGNETO Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

Carries AS5048A contactless magnetic angle position sensor that relies on the Hall Effect.

MIKROE-1886



MAGNETO 2 Click

5V 3.3V SPI 12C UART GPIO PWM AN

Enables the design of non-contacting rotary position sensors with MLX90316 sensor IC.



Manometer Click

5V 3.3V SPI 12C UART GPIO PWM AN

Carries a piezoresistive silicon pressure sensor with extremely high accuracy (±0.25%FSS BFSL).

MIKROE-2237



Manometer 2 Click

5V 3.3V SPI 12C UART GPIO PWM AN

With MS5525D-SO-SB001GS digital pressure sensor. 24-bit digital pressure and temp. value.

MIKROE-2550



Methane Click

5V 3.3V SPI 12C UART GPIO PWM AN

With MO-4 sensor for methane (CH4). Detection range 200-10000ppm of CH4.

MIKROE-1628



MOTION Click

5V 3.3V SPI 12C UART GPIO PWM AN

It's a motion detector sensitive only to live bodies with PIR500B, a pyroelectric sensor.

MIKROE-1589



MPU IMU Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

Carries MPU-6000 integrated 6-axis motion tracking device and a DMP (Digital Motion Processor).



Spectral Click

5V 3.3V SPI I2C

UART GPIO PWM AN

Uses the AS7261, an XYZ chromatic white color sensor + NIR with electronic shutter and smart interface.

MSF



Spectral 2 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Uses the AS7262, 6 channel visible spectral_ID device with electronic shutter and smart Interface.

MSRP - \$26⁰⁰ MIKROE-2973



Spectral 3 Click

5V 3.3V SPI I2C

UART GPIO PWM AN

Uses the AS7263, a 6 channel NIR Spectral_ID device with electronic shutter and smart Interface.

MSRP - \$26⁰⁰ MIKROE-2961



IR Sense 2 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Uses the AK9752, an ultra-small infrared sensor IC, with an I2C interface, from AKM.

MSRP - \$21⁰ MIKROE-2966



Barcode Click

5V 3.3V SPI I2C

UART GPIO PWM AN

The LV3296, a compact integrated barcode scanner from Rakinda company.

<mark>/SRP - \$179</mark>01 //KR0E-2913

MSRP - \$26° MIKROE-2972



MPU 9DOF Click

5V	3.3V	SPI	I2C
UART	GPIO	:PWM	: AN

Carries the MPU-9150 system in package, the world's first 9-axis motion tracking device.

MSRP - \$4200 MIKROE-1719



Ozone 2 Click

5V	3.3V	SPI	I2C
UART	GPIO	PWM	AN

With MQ131 sensor for Ozone (03). Detection range 10-1000 ppm of 03.

MSRP - \$3700 MIKROE-2767



Pollution Click

5V	3.3V	SPI	I2C
UART	GPIO	PWM	AN

Detects organic gases formaldehyde, benzene, alcohol, toluene, etc. Detection range 1x50ppm.



Pressure Click

5V	3.3V	SPI	I2C
UART	GPIO	PWM	AN

With LPS331AP digital output pressure sensor. For pressure (260-1260 mbar) and temp. (-40°C to 80°C).

MIKROE-1422



Pressure 2 Click

5V 3.3V SPI I2C UART GPIO PWM AN

With MS5803, a high resolution MEMS pressure sensor. Range 0-14 bars, resolution up to 0.2 mbars.



Pressure 3 Click

5V 3.3V SPI I2C UART GPIO PWM AN

With DPS310 digital barometric pressure sensor. Range 300-1200 hPa.



Proximity Click

5V 3.3V SPI 12C UART GPIO PWM AN

With VCNL4010 proximity and ambient light sensor. Range up to 20cm. 16-bit resolution.

MIKROE-1445



Proximity 2 Click

5V :3.3V: SPI : I2C UART: GPIO: PWM: AN

With MAX44000, an IC that integrates an ambient light and a proximity sensor. Range 0.03-65.535 lux.

MIKROE-1818



REED Click

5V 3.3V SPI 12C UART GPIO PWM: AN

With a standard reed switch. Used in mechanical systems as proximity sensors.



RF Meter Click

5V 3.3V SPI 12C UART GPIO PWM AN

It's an RF power measurement device. Frequency span 1 MHz-8 GHz, over 60 dB range.



Shake2Wake Click

5V 3.3V SPI 12C
UART GPIO PWM AN

With ADXL362 ultralow power, 3-axis MEMS accelerometer. Includes several activity detection modes.

MSRP - \$39° MIKROE-1942



SHT Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Temperature and humidity sensor SHT3x-DIS. -0 to 100% RH, 40 to 125°C temp. range.

MSRP - \$26⁰⁰ MIKROE-2101



SHT1x Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Digital humidity and temperature sensor SHT11. Not recommended for newer designs.

MSRP - \$1300 MIKROE-949



5V 3.3V SPI I2C
UART GPIO PWM AN

Smoke Click

With MAX30105 optical sensor for smoke detection. Sensor's inherent resolution 0.0625°C.

MSRP - \$19⁰⁰ MIKROE-2560



Stretch Click

 5V
 3.3V
 SPI
 I2C

 UART
 GPIO
 PWM
 AN

Measures stretch forces with conductive rubber cord - 40-160 ohms per cm resistance.

MSRP - \$35⁰⁰ MIKR0E-2064



Altitude Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

MEMS pressure sensor MPL3115A2. Pressure/altitude (20-bit) and temp. (12-bit) data.

MIKROE-1489



THERMO Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

With MAX31855K thermocouple-to-digital converter and PCC-SMP K-type thermocouple connector.

MSRP - \$2900 MIKROE-1197



THERMO 2 Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

With DS1825, a digital thermometer IC with a unique 64-bit address. -10°C to 85°C, ±0.5°C accuracy.

MSRP - \$1500 MIKROE-1840



5V 3.3V SPI 12C UART: GPIO: PWM: AN

Thermo 3 Click

With TMP102, a digital temp. sensor IC. Accurate within 0.5°C. Range from -25°C to 85°C.

MIKROE-1885



THERMO 4 Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

It carries digital temperature sensor and thermal watchdog. Range from -55 °C to +125 °C.



THERMO 5 Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

Measures temperature in default range of 0°C to 127°C and extended range of -64°C to 191°C.

MSRP - \$1100 MIKROE-2571



Thermo 6 Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

Ambient temp, measurement device, based on the MAX31875 temp. sensor.



THERMO K Click

5V 3.3V SPI 12C UART GPIO PWM: AN

It carries the MCP9600 IC. It can measure temperatures from -200 °C to +1372 °C.

MIKROE-2501




Thermostat Click

5V 3.3V SPI 12C UART GPIO PWM AN

It carries MAX7502 IC that can measure temp. from -25°C to +100°C. Accuracy ±1.5°C.

MIKROE-2273



Thunder Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

Detects the presence and proximity of lightning activity with AS3935 lightning sensor.



Tilt Click

5V 3.3V SPI 12C UART GPIO PWM: AN

With RPI-1035, a 4-directional optical tilt sensor left, right, backward, forward movement.



TILTnSHAKE Click

5V 3.3V SPI 12C UART GPIO PWM AN

With MMA84910 IC. a 3-axis digital accelerometer. Can function as a 45 ° tilt sensor.

MSRP - \$1900 MIKROE-1853



UNI HALL Click

5V 3.3V SPI 12C UART GPIO PWM AN

With US5881 unipolar Hall-effect switch sensitive to the North Pole magnetic fields.

MIKROE-1647



UV Click

5V 3.3V SPI 12C UART GPIO PWM AN

With ML8511 IC that is sensitive to UVA and UVB rays. Outputs either analog or digital signals.

MSRP - \$2400 MIKROE-1677



UV 2 Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

Carries VEML6075 UVA and UVB light sensor. With a photodiode, amplifiers, analog/digital circuits.



UV 3 Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

An advanced ultraviolet (UV) light sensor with VFMI 6070 LIVA light sensor.

MIKROE-2736



Vibra sense Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

A micro shock vibration sensor with a digital output. For anti-tampering, anti-theft devices.

MIKROE-1927



Water Detect Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

For detecting water and other electroconductive liquids. Carries Microchip's MCP606.



Weather Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

With BME280 integrated environmental unit. Detects humidity, pressure, and temperature.

MIKROE-1978



Angle Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

Hall-effect angle sensing device used to measure the rotational angle of the magnetic field.



Thermo J Click

5V 3.3V SPI 12C UART GPIO PWM AN

It is a temperature measurement Click board™. which uses a thermocouple type-J probe.

MIKROE-2811



DHT22 2 Click

5V 3.3V SPI 12C UART GPIO PWM AN

It is used for measuring the environmental temperature and relative humidity.

MIKROE-2818




IrDA 3 Click

5V 3.3V SPI 12C UART GPIO PWM AN

Intelligent IR transceiver device that sends and receives UART commands via the IR interface.

MIKROE-2871



Microwave Click

5V 3.3V SPI 12C UART GPIO PWM AN

It detects movement, thanks to the PD-V11 a 24GHz microwave motion sensor.

MSRP - \$2500 MIKROE-2781



Proximity 3 Click

5V 3.3V SPI 12C UART GPIO PWM AN

Intelligent proximity and light sensing device - high sensitivity long distance PS and ALS.



Alcohol Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Detects alcohol in concentrations from 0.04 to 4mg/l with MQ-3 Semiconductor sensor.

MSRP - \$1500 MIKROE-1586



Temp-Log Click

5V 3.3V SPI I2C
UART GPIO PWM AN

A precise ambient temperature measurement device, with 8Kbit [1024 bytes] of EEPROM memory.

MSRP - \$15⁰ MIKROE-2886



Temp-Log 2 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

A precise ambient temp. measurement device, with the additional non-volatile [EEPROM] memory.

MSRP - \$15⁰⁰ MIKROE-3004



HTU21D Click

5V 3.3V SPI 12C UART GPIO PWM AN

Carries a relative humidity sensor with temperature output. Rel. hum. 0-100%, temp. -40 to +125° C.

MSRP - \$21⁰ MIKROE-1687



ProxFusion Click

5V 3.3V SPI I2C UART GPIO PWM AN

A multifunctional capacitive and Hall-effect sensor device. Carries the IQS624, a combined multi-sensor IC from Azoteq.

MSRP - \$900 MIKROE-2920





Hall Switch Click

5V 3.3V SPI 12C UART GPIO PWM AN

Uses the AH1389, an ultra-sensitive dual output unipolar Hall Effect switch, from Diodes Incorporated.



Thermo 7 Click

3.3V SPI 12C UART GPIO PWM AN

Uses the MCP9800, a high accuracy temperature sensor IC with the 2-Wire interface, from Microchip.

MIKROE-2979




Proximity 5 Click

5V 3.3V SPI I2C UART GPIO PWM AN

Features the VCN-L4035X01 J, a fully integrated proximity and ambient light sensor.

MIKROE-2984



Proximity 6 Click

5V 3.3V SPI 12C UART GPIO PWM AN

Uses the ADUX1020, a photometric sensor for gesture and proximity detection.

MIKROE-3048




Hall current 2 Click

5V 3.3V SPI 12C UART GPIO PWM AN

A Hall effect linear current sensor with over-current fault output for less than 100 V Isolation Applications.

MSRP - \$1800 MIKROE-2987





UV 4 Click

5V	3.3V	:	SPI	:	I2C	
UART	GPIO	F	 WW	:	AN	٠

Equipped with the Si1133, a UV index and ambient light sensor with I2C Interface, from Silicon Labs.



Temp&Hum Click

E\/	2 21/	: SPI	100
ΟV	3.3 V	: 51	120
IIADT	CDIO	:PWM	: \ \ \ \ \ \
UANI	GEIU	: L AAIAI	: MIN
	*		

With HTS221 temp. and relative humidity sensor. Measurement accuracy is ±1°C in O-60°C range.

MIKROE-1971



Temp&Hum 2 Click

	•		
5\/	3.3V	CDI	120
JV	0.0V	011	. 120
IIADT	:GPIO:	D////	: \ \ \ \ \
UARI	. 01 10 .		

Uses the Si7034, a digital humidity and temperature sensor IC with I2C interface, from Silicon Labs.

MIKROE-3085



Temp-Hum 3 Click

5V	3.3V	SPI	I2C
UART	GPIO	:PWM	AN

Uses the HDC2010. a Low Power Humidity and Temperature Digital Sensor from Texas Instruments.

MSRP - \$1300 MIKROE-2937



Temp-Hum 4 Click

A smart environmental temp. and humidity sensor, uses HDC1010 sensor from Texas Instruments.



Magneto 5 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Features the MEMSIC MMC34160PJ, a 3-axis magnetic sensor IC.

MSRP - \$1500 MIKROE-3050



Color 6 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Features the AS73211, an XYZ true color sensor from AMS.

MSRP - \$320 MIKROE-3061



Color 7 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Features the TCS3472 color light to digital converter with IR filter, from AMS.

MSRP - \$160 MIKROE-3062



Ambient Click

5V 3.3V SPI I2C
UART GPIO PWM AN

With MLX75305 IC, CMOS integrated optical sensor. Converts ambient light intensity into voltage.

MSRP - \$900 MIKROE-1890



Ambient 2 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

TI's OPT3001 ambient light sensor. Measures the visible part of the light spectrum.

MSRP - \$140 MIKROE-1903



Accel 6 Click

5V 3.3V SPI 12C UART GPIO PWM AN

The BMA280, a 14bit triaxial acceleration sensor with intelligent on-chip motion triggered interrupt controller.

MIKROE-3075



Altitude 2 Click

5V 3.3V SPI 12C UART GPIO PWM AN

Uses the MS5607-02BA03, a barometric pressure sensor IC with the stainless steel cap.

MIKROE-3030



Pressure 4 Click

5V 3.3V SPI 12C UART GPIO PWM AN

Features the BMP280, a digital pressure sensor, from Bosch Sensortech.

MIKROE-3020



Alcohol 2 Click

3.3V SPI 12C UART GPIO PWM AN

The BMA280, a 14bit triaxial acceleration sensor with intelligent on-chip motion triggered interrupt controller.

MIKROE-3097



NO2 Click

5V 3.3V SPI 12C UART GPIO PWM AN

The 3SP-N02-20 gas sensor from SPEC Sensors. which can sense NO2 concentration up to 20ppm.



Gaussmeter Click

5V 3.3V SPI 12C UART GPIO PWM AN

The MLX90393, a micropower magnetometer based on the proprietary Triaxis® technology.

MIKROE-3099



Oximeter Click

5V 3.3V SPI 12C UART GPIO PWM AN

The ADPD105, a highly configurable photometric front end (AFE) device from Analog Devices.

MIKROE-3102



LightRanger 3 Click

5V 3.3V SPI 12C UART GPIO PWM AN

Uses the Simblee™ enabled RFD77402 ToF sensor module from RF Digital.

MIKROE-3103



Color 5 Click

5V 3.3V SPI 12C UART GPIO PWM AN

Uses the P12347-01CT. from Hamamatsu company.

MIKROE-3107



IrThermo 3 Click

5V 3.3V SPI 12C UART GPIO PWM AN

Uses the MLX90632 FIR sensor from Melexis as the contactless temperature sensor.





Angle 4 Click

5V 3.3V SPI 12C UART GPIO PWM AN

With the AEAT-8800-024, an integrated 10 to 16bit programmable angular magnetic encoder.



NDIR CO2 Click

5V 3.3V SPI 12C UART GPIO PWM AN

Uses the CDM7160 integrated sensor and measures an absolute CO2 concentration.

MIKROE-3134



Hall Current 3 Click

5V 3.3V SPI 12C UART GPIO PWM AN

Uses Hall effect to provide a precise and reliable measurement of reasonably high current.

MIKROE-3118



5V 3.3V SPI 12C UART GPIO PWM AN

> Features an ultra-low power triaxial accelerometer sensor, labeled as the BMA400.

MIKROE-3149



LightRanger 4 Click

5V 3.3V SPI 12C UART GPIO PWM AN


Measures an accurate distance based on a ToF with VL53L1X rangefinder module.



Load cell Click

5V 3.3V SPI 12C UART GPIO PWM AN

With the HX711, a 24bit analog to digital converter (ADC), for weight scale applications.



Microwave 2 Click

5V 3.3V SPI 12C UART GPIO PWM AN

Detects movement by utilizing the NJR4265RF2C1, an intelligent 24GHz microwave motion sensor.

MIKROE-3187




3D Hall 2 Click

5V 3.3V SPI 12C UART GPIO PWM AN

Measures the magnetic field in three perpendicular axes. With the TLV493D-A1B6, a 3D magnetic sensor.

MIKROE-3190



IR Grid 2 Click

5V 3.3V SPI 12C UART GPIO PWM AN

It is equipped with the MLX90640, a 32x24 IR array sensor which contains 8 Kbit EEPROM.


MIKROE-3194



CO 2 Click

5V 3.3V SPI 12C UART GPIO PWM AN

With the SPEC amperometric, 3SP CO 1000 gas sensor which electrochemically reacts with the (CO).



Vacuum Click

5V 3.3V SPI I2C
UART GPIO PWM AN

With the monolithic vacuum sensor the MPXV6115V, it measures pressure values down to -115kPa.

MSRP - \$4300 MIKROE-3195



Ambient 4 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Uses the BH1721FVC, a 16-bit digital light sensor with the I2C serial interface.

MSRP - \$16⁰⁰ MIKROE-3199



3D HALL 5 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Carries the IIS2MDC-TR, a low power 3D magnetic sensor.

MSRP - \$15⁰⁰ MIKROE-3197



Color 8 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Features the ROHM's BH1749NUC, an integrated color sensor IC.

MSRP - \$1500 MIKROE-3213



ATA6570 Click

5V 3.3V SPI 12C UART GPIO PWM AN

Uses the ATA6570. a standalone high speed CAN transceiver IC from Microchip.

MIKROE-2900



DALI 2 Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

It is used for interfacing with the DALI network, and as a compliant with the DALI-2 physical layer requirements.

MSRP - \$2500 MIKROE-2672




iButton™ Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

Comes with Maxim's DS1990A. a serial number iButton[™] device with a unique 64-bit serial number.

MIKROE-3045



USB UART 3 Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

The CP2102N, a highly integrated USB to UART interface, from Silicon Lahs.

MIKROE-3063



RS232 2 Click

5V 3.3V SPI 12C UART GPIO PWM AN

The MAX3237E, a 3V to 5.5V multichannel RS232. 1 Mbit/s line driver/receiver from Texas Instruments.



1-Wire I2C Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Converts I2C to 1-wire with DS28E17 1-Wireto-I2C master bridge from Maxim Integrated.

MSRP - \$2201 MIKROE-2750



4-20 mA R Click

 5V
 3.3V
 SPI
 I2C

 UART
 GPIO
 PWM
 AN

Serves as a receiver in a 4-20mA current loop standard. Converts it into a voltage [0.4-2V].

MSRP - \$2600 MIKROE-1387




4-20 mAT Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Easy solution for adding 4-to-20mA industry standard communication protocol to your design.

MSRP - \$26⁰⁰ MIKROE-1296



ck

5V 3.3V SPI I2C
UART GPIO PWM AN

Microchip's ATA6563 high-speed CAN transceiver for Classical CAN and CAN FD networks.

MSRP - \$20⁰⁰ MIKROE-2334




ATA663211 Click

5V 3.3V SPI I2C

UART GPIO PWM AN

LIN transceiver IC designed to handle lowspeed data communication in applications.

I<mark>SRP - \$19⁰⁰</mark> IKR0E-2335

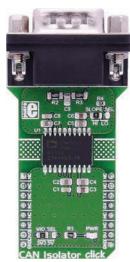









CAN Isolator Click

5V 3.3V SPI 12C UART GPIO PWM AN

Provides isolated CAN communication. Data rates of up to 1 Mbps. Carries a DB 9-pin male connector.

MIKROE-2627

CAN SPI Click 3.3V

5V 3.3V SPI 12C UART: GPIO: PWM: AN

Adds CAN connectivity with SPI interface. Features SN65HVD230 CAN transceiver circuit.

MSRP - \$2100 MIKROE-986

CAN SPI Click 5V

5V 3.3V SPI 12C UART: GPIO: PWM: AN

Adds CAN connectivity with SPI interface. With MCP2551 CAN transceiver circuit.

MSRP - \$2100 MIKROE-988

DALI Click

5V 3.3V SPI 12C UART GPIO PWM: AN

Provides Digital Lighting Interface. With two optocouplers, push button, screw terminal.

MIKROE-1297

ETH Click

5V 3.3V SPI 12C UART GPIO PWM AN

With ENC28J60, a 28-pin, 10BASE-T stand-alone Ethernet controller with an nn-hoard MAC & PHY.



ETH WIZ Click

5V 3.3V SPI 12C UART GPIO PWM AN

With W5500, a 48-pin, 10/100 BASE-TX standalone Ethernet controller. Standard RJ-45 connector.

MSRP - \$19° MIKROE-1718



EXPAND Click

5V 3.3V SPI I2C UART GPIO PWM AN

Expands the number of input-output lines with Microchip's 16-bit I/O expander MCP23S17.

MSRP - \$12⁰⁰ MIKROE-951



Expand 2 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Expands the number of input-output lines with Microchip's 16-bit I/O expander MCP23017.

MSRP - \$1200 MIKROE-1838



Expand 3 Click

5V 3.3V SPI 12C UART GPIO PWM AN

With DS2408, an 8-channel programmable I/O expander from Maxim Integrated.

MSRP - \$190 MIKROE-1874



EXPAND 4 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Port expander for high power peripherals with TPCIC6A595 power logic 8-bit register.

MSRP - \$1400 MIKROE-1910



Fiber Opt Click

5V 3.3V SPI 12C UART GPIO PWM AN

Adds fiber-optic communication with IF-D91 fiber-optic photodiode, IF-E97 fiber-optic LED diode.

MIKROE-1940



FTDI Click

5V 3.3V SPI I2C UART GPIO PWM AN

With FT2232H - dual high speed USB 2.0 to UART/I2C/SPI serial interface converter.

MIKROE-1421



12C 1-Wire Click

5V 3.3V SPI 12C UART:GPIO:PWM: AN

Performs bidirectional conversions between I2C masters and 1-Wire slave devices with DS2482-800.

MIKROE-1892



12C Isolator Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

TI's ISO1540, a lowpower, bidirectional isolator compatible with I2C interfaces.

MIKROE-1878



12C Isolator 2 Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

Provides I2C lines and power isolation for slave devices with ADM3260 dual I2C isolator.



MCP2003B Click

5V 3.3V SPI 12C UART GPIO PWM AN

It's a physical interface to automotive and industrial LIN systems with a bi-directional LIN transceiver.

MIKROE-2227




MCP2517FD Click

5V 3.3V SPI 12C UART GPIO PWM AN

With MCP2517FD CAN FD controller and ATA6563 highspeed CAN transceiver.

MSRP - \$2500 MIKROE-2379

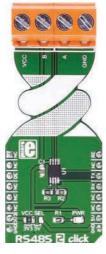

RS485 2 Click

5V 3.3V SPI 12C UART GPIO PWM AN

Carries MAX3471 half-duplex transceiver for lithium battery-powered RS-485/ RS-422 applications.

MIKROE-2700



MCP2542 Click

5V 3.3V SPI 12C UART GPIO PWM: AN

Microchip's CAN FD Transceiver with Wake-Up Pattern. Compliant with CAN 2.0 and CAN FD.

MSRP - \$2000 MIKROE-2299



RS485 Click 3.3V

5V 3.3V SPI 12C UART GPIO PWM AN

Carries SN-65HVD12 half-duplex, RS-485 transceiver from Texas Instruments.

MSRP - \$1800 MIKROE-989





MCP25625 Click

5V 3.3V SPI 12C UART GPIO PWM AN

With CAN controller with an integrated transceiver. High speed operation up to 1 Mb/s.



RS485 Click 5V

3.3V SPI 12C UART GPIO PWM AN

Carries the ADM485 differential line transceiver from Analog Devices.

MSRP - \$1800 MIKROF-925



PS/2 Click

5V 3.3V SPI 12C UART GPIO PWM AN

Adds keyboard and mouse connectivity. With a standard 6-pin Mini-DIN PS/2 connector.


MIKROE-1576



PWM Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

For controlling 16 PWM outputs through a single I2C interface. With PCA9685PW IC.



SPI Isolator Click

5V 3.3V SPI 12C UART GPIO PWM AN

Carries ADuM4154 5kV digital isolator optimized for a serial peripheral interface (SPI).

MIKROF-2583





5V 3.3V SPI I2C
UART GPIO PWM AN

With ADM2682EBRIZ, a 5 kV RMS signal and power isolated RS-485 transceiver.

MSRP - \$4900 MIKROE-2673



RS232 Click

 5V
 3.3V
 SPI
 I2C

 UART
 GPIO
 PWM
 AN

Adds RS232 connectivity with a standard RS232 DB9 port and a MAX3232 IC.

MSRP - \$1500 MIKROE-1582



USB I2C Click

5V 3.3V SPI I2C
UART GPIO PWM AN

With MCP2221 USB-to-UART/I2C converter. Fullspeed USB [12 Mb/s], I2C up to 400 kHz clock rates.

MSRP - \$13st MIKROE-1985



5V 3.3V SPI I2C
UART GPIO PWM AN

USB SPI Click

Microchip's MCP2210 USB-to-SPI protocol converter with GPIO as well as USB MINI B connector.

MSRP - \$13 MIKROE-1204



USB UART 2 Click

5V 3.3V SPI I2C

UART GPIO PWM AN

Provides USB isolation and carries the AD-UM4160BRWZ USB port isolator.

MSRP - \$390 MIKROE-2674



USB UART Click

5V 3.3V SPI 12C UART GPIO PWM AN

Adds serial UART communication via USB cable. With FT232RL USB-to-HART interface module.

MIKROE-1203



ATA663254 Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

It is a fully integrated LIN transceiver device with an integrated 5V LDO voltage regulator.

MSRP - \$1600 MIKROF-2872



BroadR-Reach Click

5V 3.3V SPI 12C UART GPIO PWM: AN

For realizing network in harsh environments that require reliable Ethernet-based open network.



USB UART 4 Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

USB to asynchronous serial data transfer interface. With FT232RL, USB-to-UART interface module.

MIKROF-2810



RS232 Isolator Click

5V 3.3V SPI 12C UART GPIO PWM AN

Isolated dual transceiver Click - secure and easy UART to RS232 conversion. with galvanic isolation.



OBDII Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Tap inside the car diagnostic systems! Features the STN1110 Multiprotocol OBD to UART Interface.

MSRP - \$47⁹⁰ MIKROE-2452



RS485 3 Click

5V 3.3V SPI 12C

UART GPIO PWM AN

The Click is intended to be used as UART to RS422/RS485 communication interface.

MSRP - \$2000 MIKROE-2821




PWM 2 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

With the LT8500, a 48-Channel LED PWM generator with 12-Bit res. and 50MHz serial interface.

MSRP - \$19⁰⁰ MIKROE-3148




LLC-I2C Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Used as the level converter for logic signals. It is perfectly suited for the bi-directional I2C communication.

MSRP - \$9⁰⁰ MIKROE-3276



LLC-SPI Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Used as the level converter for logic signals. It is perfectly suited for SPI communication.

MSRP - \$9⁰⁰ MIKROE-3298



UART 1-Wire Click

5V 3.3V SPI 12C UART GPIO PWM AN

Designed to convert standard UART or RS232 signals into 1-Wire® signals.



4D - display Click

3.3V SPI 12C UART GPIO PWM AN

Offers a mikroBUS™ interface for controlling 4D Systems gen4 Series intelligent Display Modules.

MSRP - \$900 MIKROE-3044



Skywire™ Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

Adapter Click, which hosts NimbeLink/Skywire™ cellular modems (using stacking headers).

MSRP - \$1900 MIKROE-2405



Adapter Click

5V 3.3V SPI I2C UART GPIO PWM AN

Simplifies connection of the add-on boards with IDC10 headers to mikroBUS™ socket.

MIKROE-1432



Riverdi Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN


An adapter for connecting Riverdi TFT displays to a mikrnBUS[™] sncket.



Shuttle Click

5V 3.3V SPI I2C UART GPIO PWM AN

The mikroBUS™ socket expansion board, which allows stacking up to four Click hoards™.



16x9 G Click

5V 3.3V SPI 12C UART GPIO PWM: AN

With a green 16x9 LED matrix and IS31FL3731 audio modulated matrix LED driver.

MIKROE-2520



4Dot-Matrix R Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

Displays 4 char. of 5x7 dot size. With SL02016 module and MCP23017 12C port expander.

MIKROE-2706




4X4 RGB Click

5V 3.3V SPI 12C UART GPIO PWM AN

With a matrix of 16 WS2812 RGB LEDs a MCP1826 low dropout regulator.

MIKROE-1881

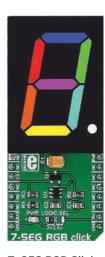

7-SEG RGB Click

5V 3.3V SPI 12C UART GPIO PWM AN

Carries a full color single 7 segment digit display. 16,581,375 color combinations.



7seq Click

5V 3.3V SPI 12C UART GPIO PWM: AN

2-digit seven-seg display. With two 74HC595 8-bit serial-in, parallel-out shift registers.

MIKROE-1201




7x10 B Click

5V 3.3V SPI 12C UART GPIO PWM AN

With a matrix of 70 blue LEDs driven by a pair of 8-bit serial-in, parallel-out shift registers.

MIKROE-2789



7x10 G Click

5V 3.3V SPI 12C UART GPIO PWM AN

With a matrix of 70 green LEDs driven by a pair of 8-bit serial-in, parallel-out shift registers.

MIKROE-2705



7x10 R Click

5V 3.3V SPI 12C UART GPIO PWM AN

With a matrix of 70 red LEDs driven by a pair of 8-bit serial-in, parallel-out shift registers.

MIKROE-1993



7x10 Y Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

With a matrix of 70 yellow LEDs driven by a pair of 8-bit serial-in, parallel-out shift registers.



16x12 G Click

5V 3.3V SPI 12C UART GPIO PWM AN

Carries a 16x12 LED display and the IS-31FL3733 matrix driver with 1/12 cycle rate.

MSRP - \$3000 MIKROE-2758



8x8 B Click

5V 3.3V SPI 12C UART GPIO PWM: AN

It features MAX7219 8-digit LED display driver module as well as 64 BLUE LEDs.

MIKROE-1307



8x8 G Click

5V 3.3V SPI 12C UART GPIO PWM AN

It features MAX7219 8-digit LED display driver module as well as 64 GREEN LEDs.

MIKROE-1306



8x8 R Click

5V 3.3V SPI 12C UART GPIO PWM AN

It features MAX7219 8-digit LED display driver module as well as 64 RED LEDs.



8x8 Y Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

It features MAX7219 8-digit LED display driver module as well as 64 YELLOW LEDs.



BarGraph Click

5V 3.3V SPI 12C
UART GPIO PWM AN

With 10-segment JSB-R102510Z light bar display and two 74HC5 95 8-bit shift registers.

MSRP - \$1200 MIKROE-1423



BIG 7-SEG R Click

5V 3.3V SPI 12C
UART GPIO PWM AN

With SC10-21SR-WA seven-segment display and parallel-OUT shift register 74HC595.

MSRP - \$1900 MIKROE-2269



eINK Click

5V 3.3V SPI 12C
UART GPIO PWM AN

With an adapter for connecting eINK displays, with a 24pin ribbon cable.

MSRP - \$5900 MIKROE-2659




EVE Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Brings visually stunning graphics even to 8-bit MCUs, with FT800Q graphics controller.

MSRP - \$39⁰⁰ MIKROE-1430



Matrix G Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Matrix text display with two green 5x7 matrices and two MAX7219 8-bit LED display drivers.

MSRP - \$2900 MIKROE-2246



LED Flash Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Functions as a high power LED flash, and carries the CAT3224 flash LED driver.

MSRP - \$34^o MIKROE-2479



LED Flash 2 Click

5V 3.3V SPI I2C UART GPIO PWM AN

It is a powerful flash/ torch Click, featuring the MIC2870 from Microchip.

MSRP - \$19⁰⁰ MIKROE-2830



Led ring R Click

5V 3.3V SPI I2C
UART GPIO PWM AN

With a ring of 32 red LEDs driven by four 74HC595 serial-in, parallel-out shift registers.

MSRP - \$16^{III} MIKROE-2153




AlphaNum R Click

5V 3.3V SPI 12C
UART GPIO PWM AN

With a dual character red LED 14-segment display and two TLC5926 16-bit shift registers.

MSRP - \$15⁰ MIKROE-1864



AlphaNum G Click

5V 3.3V SPI I2C
UART GPIO PWM AN

With a dual character green LED 14-segment display and two TLC5926 16-bit shift registers.

MSRP - \$15⁰⁰ MIKROE-1851



Matrix R Click

5V 3.3V SPI 12C UART GPIO PWM AN

Matrix text display with two red 5x7 matrices and two MAX7219 8-bit LED display drivers.

MIKROE-2245



Matrix RGB Click

5V 3.3V SPI 12C UART GPIO PWM: AN

Powered by a 32-bit FT900 MCU designed specifically for powering 16x32 RGB LFD matrices.

MIKROE-2239



OLED B Click

5V 3.3V SPI I2C UART: GPIO: PWM: AN

With a 96 x 39px blue monochrome passive matrix OLED display and SSD1306 controller.

MIKROE-1650



OLED C Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

With PSP27801 OLED display and SSD1351 OLED driver with controller. Various color support.

MIKROE-1585



LCD mini Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

Displays 2x16 monochrome characters on an LMB162XFW LCD display.



OLED W Click

5V 3.3V SPI I2C UART GPIO PWM AN

Carries a 96x39px white monochrome passive matrix OLED display.

MIKROE-1649



OSD Click

5V 3.3V SPI 12C UART GPIO PWM: AN

With MAX7456 single-channel monochrome OSD module with integrated EEPROM memory.

MIKROE-1366



UT-L 7-SEG R Click

5V 3.3V SPI 12C UART GPIO PWM AN

With two SMD ultra-thin LED 7-SEG displays and MAX6969 constant-current LED driver.



UT-M 7-SEG R Click

5V 3.3V SPI 12C UART GPIO PWM AN

Add a double 7 segment display to your next project. RED emitting color.

MSRP - \$2000 MIKROE-2746



UT-S 7-SEG R Click

5V 3.3V SPI 12C UART GPIO PWM AN

For displaying characters on two 7 segment displays. RED emitting color.



OLED Switch Click

5V 3.3V SPI 12C UART GPIO PWM AN

With NKK Switch IS-C15ANP4 that combines a switch and a full color organic LED display.



BarGraph 2 Click

5V 3.3V SPI 12C UART GPIO PWM AN

The 74HC595, 8-bit serial-in, parallel-out shift registers with output latches.

MIKROE-3021



RGB Driver Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

The NCP5623B, a triple output RGB LED driver, controlled via the I2C interface. from ON Semiconductors.

MIKROE-3078



BarGraph 3 Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

Uses a single 74HC595 IC, a tri-state, serial-in, parallel-out, 8-bit shift-register with output latch.



ROTARY Y Click

5V 3.3V SPI 12C
UART GPIO PWM AN

With a 15-pulse incremental rotary encoder with detents, surrounded by a ring of 16 yellow LEDs

MSRP - \$12" MIKROE-1825



ROTARY B Click

5V 3.3V SPI 12C UART GPIO PWM AN

With a 15-pulse incremental rotary encoder with detents, surrounded by a ring of 16 blue LEDs.

MSRP - \$1200 MIKROE-1824



ROTARY G Click

5V 3.3V SPI I2C
UART GPIO PWM AN

With a 15-pulse incremental rotary encoder with detents, surrounded by a ring of 16 green LEDs.

MSRP - \$1200 MIKROE-1822



ROTARY O Click

5V 3.3V SPI 12C
UART GPIO PWM AN

With a 15-pulse incremental rotary encoder with detents, surrounded by a ring of 16 orange LEDs.

MSRP - \$1200 MIKROE-2380



ROTARY R Click

 5V
 3.3V
 SPI
 I2C

 UART
 GPIO
 PWM
 AN

With a 15-pulse incremental rotary encoder with detents, surrounded by a ring of 16 red LEDs.

MSRP - \$1200 MIKROE-1823



CapSense Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

Capacitive sensing module. Input-human body capacitance, output - the real time sensor information.

MIKROE-1446



COUNTER Click

5V 3.3V SPI 12C UART GPIO PWM: AN

Counter Click carries an LS7366R 32-bit quadrature counter.

MIKROE-1917



Fingerprint Click

5V :3.3V: SPI : I2C UART: GPIO: PWM: AN

Solution for adding biometric security to your design.

MIKROE-1722



IR gesture Click

5V 3.3V SPI 12C UART GPIO PWM AN

Enables contactless gesture recognition. With ambient light and proximity sensing capabilities.

MIKROE-2086



Joystick Click

5V 3.3V SPI 12C UART GPIO PWM AN

A smart navigation key concept based on contactless, magnetic movement detection.



2x2 Key Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

The Click has a 4 button keypad. It allows multiple key presses and has a dehounce circuit.

MIKROE-2152



4x4 Key Click

5V 3.3V SPI 12C UART GPIO PWM AN

Carries a 16 button keypad. Allows for multiple key presses at the same time.

MIKROE-1889



Button G Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

A single pushbutton transparent, 6.8mm in diameter, with a green LED backlight.

MIKROE-2040



Button R Click

5V 3.3V SPI 12C UART GPIO PWM AN

A single pushbutton - transparent, 6.8mm in diameter, with a red LED backlight.

MIKROE-1901



Cap Extend Click

5V 3.3V SPI 12C UART GPIO PWM AN

With SX8633, capacitive button touch controller. 12 pins for connecting capacitive inputs.



Tamper Click

5V 3.3V SPI I2C UART GPIO PWM AN

Equipped with SDS001, a low profile side-actuated detect switch.

MSRP - \$900 MIKROE-2551



Tamper 2 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Levered D2HW-A221D switch. Outputs signal in both positions - pressed and released.

MSRP - \$1500 MIKROE-2552



Thumb wheel Click

5V 3.3V SPI I2C UART GPIO PWM AN

With a 10-position rotary sprocket connected to a 1-Wire 8-Channel Addressable Switch.

MSRP - \$29⁰ MIKROE-2366



TouchClamp Click

5V 3.3V SPI I2C
UART GPIO PWM AN

With NXP's MPR121 proximity capacitive touch sensor controller. 7 plated holes for clamps.

MSRP - \$9⁰¹ MIKROE-2294



Keylock Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Carries a processed sealed key lock mechanism that can be set in 3 different positions.

MSRP - \$25⁰⁰ MIKROE-2564



Touchpad Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

Capacitive touch input device driven by Microchip's MTCH6102 controller.

MIKROE-1995



Thumbstick Click

5V 3.3V SPI 12C UART GPIO PWM AN

A high precision input device with a dual axis, spring return and pushbutton enabled joystick.

MIKROE-1627



Cap Extend 3 Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

With four capacitive sensor pads that can sense touch through a variety of different materials.

MIKROE-2474



Cap Touch Click

5V 3.3V SPI 12C UART GPIO PWM: AN

A capacitive touch sensing button, integrated on a Click hnard™.

MIKROE-2888



Cap Touch 2 Click

5V 3.3V SPI 12C UART GPIO PWM AN

a capacitive touch sensing button, which features the CAP1166.

MSRP - \$1500



TouchKey Click

5V	3.3	V: SP	ı	120
UAR1	GPI):PWI	M:	AN

It has four capacitive pads powered by TTP224, a touchpad detector IC.

MSRP - \$12° MIKROE-1906



TouchKey 2 Click

5V	3.3\	/ SF	ol .	I2C
		:		
UART	GPIC):PW	M:	AN

With 4 capacitive pads powered by Microchip's ATtiny817. Integrated touch QTouch® controller.

MSRP - \$16° MIKROE-2474



TouchKey 3 Click

5V	3.3V	SPI	I2C
		• • • • • • • • • •	
UART	GPIO	:PWM	: AN

Equipped with advanced capacitive sensors, based on the proprietary QTouch® technology.

MSRP - \$19⁰⁰ MIKROE-2405



TouchKey 4 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

A capacitive touch sensing button, with the advanced touch/ proximity sensor IC.

MSRP - \$15⁰ MIKROE-2965

Button Y Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Designed with the high-quality, single-pole, single-throw [SPST] tactile switch labeled as 3006.2111.

MSRP - \$99 MIKROE-3262



Button PLAY Click

5V 3.3V SPI I2C
UART GPIO PWM AN

It is equipped with the CTHS15CICO5ARROW, a capacitive touch sensor display.

MSRP - \$2100 MIKROE-3327



Knob G Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Combination of highquality quadrature rotary encoder, and a LED ring of 24 individual green LEDs.

MSRP - \$17^{ot} MIKROE-3299



5V 3.3V SPI 12C
UART GPIO PWM AN

FRAM Click

256K (32,768 words x 8 bits) of Ferroelectric Random Access Memory with MB85RS256A module.

MSRP - \$15 MIKROE-1486



FRAM 2 Click

5V 3.3V SPI 12C UART GPIO PWM AN

With CY15B104Q 4-Mbit [512K x 8] serial F-RAM from Cypress. 100 trillion [10^14] read/writes.

MSRP - \$1900 MIKROE-2768



EEPROM Click

5V 3.3V SPI I2C
UART GPIO PWM AN

With 24C08WP - a highly reliable, high performance CMOS technology serial 8K FEPROM

MSRP - \$800



EEPROM 2 Click

5V 3.3V SPI 12C UART GPIO PWM AN

With M95M02-DR DIP-8 socket EEPROM chip with 256 KB of memory from STMicroelectronics.

MSRP - \$1800 MIKROE-1909



EEPROM 3 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

With AT24CM02 DIP-8 socket EEPROM chip with 256 KB of memory from Microchip.

MSRP - \$14⁰⁰ MIKROE-1989



.

5V 3.3V SPI I2C
UART GPIO PWM AN

EERAM 3.3V Click

With 47L16 EERAM, a 16Kbit SRAM with EE-PROM Backup from Microchip.

MSRP - \$14⁰⁰ MIKROE-2728



EERAM 5V Click

5V 3.3V SPI I2C
UART GPIO PWM AN

With 47C16 EERAM, a 16Kbit SRAM with EEPROM Backup from Microchip.

MSRP - \$14⁰ MIKROE-2729



Flash Click

5V 3.3V SPI 12C
UART GPIO PWM AN

With EN25Q80B - 8Mb serial Flash memory module. Clock frequency up to 75MHz.

MSRP - \$10^u MIKROE-1199



Flash 2 Click

5V 3.3V SPI 12C
UART GPIO PWM AN

It carries Microchip's SST26VF064B flash-memory module with 64 Mbits capacity.

MSRP - \$1200 MIKROE-2267



Flash 3 Click

5V 3.3V SPI 12C
UART GPIO PWM AN

With ISSI's IS25LP128 IC with 128 Mbit capacity. 50MHz at Normal, 133MHz at Fast Read speeds.

MSRP - \$1200 MIKROE-2374




Flash 4 Click

5V 3.3V SPI 12C
UART GPIO PWM AN

Carries the S25FL512S, a 512 Mbit SPI Flash memory module.

MSRP - \$25^t MIKROE-3191



Excelon-LP Click

 5V
 3.3V
 SPI
 I2C

 UART
 GPIO
 PWM
 AN

Equipped with the CY-15B108Q, a serial ferroelectric (FRAM) module with 8 Mbit density.

MSRP - \$2500 MIKROE-3104



MAC Address Click

5V 3.3V SPI 12C UART GPIO PWM AN

A unique node address. Carries 24AA025E64 2Kb Serial EEPROM with EUI-64™ node identity.



microSD Click

5V 3.3V SPI 12C UART GPIO PWM AN

With a microSD card slot for microSD cards used as a mass storage media for portable devices.

MSRP - \$1600 MIKROE-924



Secure Click

5V 3.3V SPI 12C UART GPIO PWM AN

With ATECC508A cryptographic coprocessor with secure hardware-based key storage.

MIKROE-2522



Secure 2 Click

5V 3.3V SPI 12C UART GPIO PWM AN

Microchip's ATAES132A, a cryptographic coprocessor with secure hardware-based key storage.

MSRP - \$900 MIKROE-2760



Secure 3 Click

5V 3.3V SPI 12C UART GPIO PWM AN

Microchip's ATSHA204A, a cryptographic coprocessor with secure hardware-based key storage.

MSRP - \$900 MIKROE-2761



Secure 4 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Includes the ATECC608A, a secure CryptoAuthentication™ device from Microchip.

MSRP - \$900 MIKROE-2829



SRAM Click

 5V
 3.3V
 SPI
 I2C

 UART
 GPIO
 PWM
 AN

Provides 1 Mbit of additional SRAM memory, via Microchip's 23LC1024.

MSRP - \$150 MIKROE-1902



SQI FLASH Click

5V 3.3V SPI 12C
UART GPIO PWM AN

Based on the SST-26VF064B, a 64 Mbit Serial Quad I/O flash device from Microchip.

MSRP - \$13⁹⁰ MIKROE-2828



EEPROM 4 Click

5V 3.3V SPI 12C UART GPIO PWM AN

An EEPROM memory medium with the capacity of 256KB.

MSRP - \$15⁰ MIKROE-2536



MRAM Click

5V 3.3V SPI I2C UART GPIO PWM AN

Uses the MR25H256, a 256 kilobits serial SPI MRAM memory module from Everspin company.

MSRP - \$1800 MIKROE-2914



Opto Click

5V 3.3V SPI 12C UART GPIO PWM AN

It features two V02630 dual channel, high speed optocoupler modules.

MIKROE-1196



RELAY Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

With two G6D1AA-SI-5DC power PCB relay modules. Controls up to 5A, 250V AC/30V DC loads.

MIKROE-1370




Relay 2 Click

5V 3.3V SPI 12C UART GPIO PWM AN

Carries two LCA717 single-pole, OptoMOS® solid state relays.

MIKROE-1899



PROTO Click

5V 3.3V SPI 12C UART GPIO PWM: AN

10x11 prototyping area and additional power pads for creating custom electronics or Click boards™.

MIKROE-1507



FLICKER Click

5V 3.3V SPI 12C UART GPIO PWM: AN

TI's NA556 dual precision timer and Omron's G6D-ASI power PCB relay. ON/OFF 0.1-6 sec.

MIKROF-2481



Signal Relay Click

5V 3.3V SPI I2C
UART GPIO PWM AN

It carries four ultra-small GV5-1 PCB relays from Omron. For ON/OFF control.

MSRP - \$2901 MIKROE-2154




UNIQUE ID Click

5V 3.3V SPI 12C
UART GPIO PWM AN

With DS2401 enhanced silicon serial number IC. Provides a unique registration number.

MSRP – \$9⁰⁰ MIKROE-1819



TESTER Click

5V 3.3V SPI I2C UART GPIO PWM AN

An ideal solution for testing and diagnostics of the mikroBUS $^{\text{M}}$ socket pin states.

MSRP - \$600 MIKROE-3083



Opto 2 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Uses four TLP2770, 20-Mbps low-power optocouplers, from Toshiba.

MSRP - \$25⁰ MIKROE-3015



Opto 3 Click

5V 3.3V SPI I2C UART GPIO PWM AN

Two pairs of normally opened, high-quality solid-state relays labeled as TLP241A.

MSRP - \$2100 MIKROE-3319



Brushless Click

5V 3.3V SPI 12C UART GPIO PWM AN

Toshiba's TB6575F-NG IC for driving 3-phase full-wave Brushless DC motors.



Brushless 2 Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

It carries TI's DRV10964 BLDC motor controller with an integrated output stage.

MIKROE-2754



Brushless 3 Click

5V 3.3V SPI 12C UART GPIO PWM AN

With TI's DRV10983 three-phase sensorless motor driver with integrated power MOSFETs.

MIKROE-2766



DC MOTOR Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

With TI's DRV8833RT-YH-Bridge motor driver and TI's 74HC4053 multiplexer.

MIKROE-1526



DC MOTOR 2 Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

With Toshiba's TB6593F-NG driver IC for direct current motors. Motors' supply voltage 2.5V-13V.



DC MOTOR 3 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

With Toshiba's TB-6549FG full-bridge driver for direct current motors. Up to 3.5A with 30V.

MSRP - \$1900 MIKROE-2047



DC MOTOR 4 Click

 5V
 3.3V
 SPI
 I2C

 UART
 GPIO
 PWM
 AN

With MAX14870 motor driver from Maxim Integrated. Motors' voltage supply 4.5V-36V.

MSRP - \$1500 MIKROE-2221



DC MOTOR 5 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

With Ti's DRV8701 brushed DC motor full-bridge gate driver. Operating voltage supply 5.9V-45V.

MSRP - \$1700 MIKROE-2699



Fan Click

5V 3.3V SPI I2C
UART GPIO PWM AN

With EMC2301 controller for powering and regulating the operation of 5V four-wire fans.

MSRP - \$9⁵ MIKROE-2004



Fan 2 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

With MAX31760 precision fan-speed controller. Can control two fans at the same time.

MSRP - \$1500 MIKROE-2708



HAPTIC Click

5V 3.3V SPI 12C UART GPIO PWM AN

With DRV2605 Haptic Driver for ERM and LRA vibration motors. Over 100 haptic effects library.



PWM driver Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

Silicon Labs' Si8711CC one-channel isolator for controlling DC motors with loads up to 10A.



STEPPER Click

5V 3.3V SPI 12C UART GPIO PWM AN

With A3967SLBT microstepping motor driver with a built-in translator, Max. output drive 30V, ±500 mA.

MIKROE-1528



STEPPER 2 Click 5V 3.3V SPI 12C UART GPIO PWM AN

With A4988 microstepping motor driver. Required external power supply minimum 7V.

MIKROE-1926



STEPPER 3 Click

5V 3.3V SPI 12C UART GPIO PWM AN

With TI's ULN2003 High-**Current Darlington** transistor array. For precise motor control.



STEPPER 4 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

With TB67S269FTG two-phase bipolar stepping motor driver from Toshiba.

MSRP - \$1901 MIKROE-2748



Brushless 6 Click

 5V
 3.3V
 SPI
 I2C

 UART
 GPIO
 PWM
 AN

Designed to drive a three-phase sensorless, brushless motor. With ATmega8A from Microchip.

MSRP - \$2700 MIKROE-2847



Fan 3 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Perfect solution for speed control. It can operate in seven discrete speed steps.

MSRP - \$17⁹¹ MIKROE-2841



Vibro Motor Click

5V 3.3V SPI 12C UART GPIO PWM AN

Features a compact size Eccentric Rotating Mass [ERM] motor, labeled as C1026B002F.

MSRP - \$12¹ MIKROE-2826



DC Motor 8 Click

 5V
 3.3V
 SPI
 I2C

 UART
 GPIO
 PWM
 AN

The MIC4605, 85V halfbridge MOSFET driver with adaptive dead time and shoot-through protection.

MSRP - \$1800 MIKROE-2893



Stepper 7 Click

5V 3.3V SPI 12C UART GPIO PWM AN

MTS62C19A Dual Full-Bridge Motor Driver, MCP23S08 8bit I/O Expander with Serial Interface.



H-Bridge Click

3.3V SPI 12C UART GPIO PWM AN

Uses the MC34933, a dual H-bridge driver, from NXP.

MIKROE-3031



H-Bridge 2 Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

Uses the MPC17510. an H-Bridge DC motor driver, with up to 15V and 1.2A. from NXP.

MIKROE-3000



Brushless 4 Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

The MCP8063, a 3 phase brushless sinusoidal sensorless motor driver, from Microchip.

MIKROE-3019



Brushless 5 Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

Uses the A4941, a threephase sensorless fan driver IC, made by Allegro MicroSystems LLC.



Stepper 5 Click

 5V
 3.3V
 SPI
 I2C

 UART
 GPIO
 PWM
 AN

Uses the TM2208, a highly integrated bipolar step motor power driver, with the UART interface.

MSRP - \$179 MIKROE-2624



Driver Click

5V 3.3V SPI I2C UART GPIO PWM AN

The DRV777, an integrated motor and relay driver from Texas Instruments.

MSRP - \$1301 MIKROE-3109



Servo Click

5V 3.3V SPI I2C
UART GPIO PWM AN

A 16-channel PWM servo driver with the voltage sensing circuitry.

MSRP - \$25^o MIKROE-3133



FAN 4 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

A two-wire fan driver. Utilizes the LTC1695, an I2C fan speed controller.

MSRP - \$1500 MIKROE-3200



DC MOTOR 7 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Advanced PWM chopper-type integrated DC motor driver, labeled as TB67H400AFTG.

MSRP - \$19⁰⁰ MIKROE-3289



2x20W Amp Click

5V 3.3V SPI 12C UART GPIO PWM AN

Carries MAX9744 stereo class D audio power amplifier from Maxim Integrated.



2x5W AMP Click

5V 3.3V SPI 12C UART GPIO PWM AN

Functions as an amplifier. With TDA7491LP 2x5-watt dual BTL class-D audio amplifier.

MIKROE-2477



AudioAmp Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

A mono audio amplifier. With TI's LM481000-01 Boomer™ Mono, 1.3W Audio Power Amplifier IC.

MSRP - \$1400 MIKROE-2368



BUZZ Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

Features a piezo speaker capable of emitting audio signals. Resonant frequency 3.8 kHz.



BUZZ 2 Click

5V 3.3V SPI 12C UART GPIO PWM AN

With CMT-8540S-SMT magnetic buzzer transducer. The huzzer's resonant frequency is 4 kHz.



StereoAmp Click

5V 3.3V SPI I2C
UART GPIO PWM AN

With 2 Tl's LM48100Q-Q1 Boomer™ single supply, mono, bridge-tied load amplifier ICs.

MSRP - \$2400 MIKR0E-2454



TextToSpeech Click

5V 3.3V SPI I2C
UART GPIO PWM AN

With S1V30120 speech synthesis IC powered by the Fonix DECtalk* v5 speech synthesis engine.

MSRP – \$39⁰⁰ MIKROE-2253



GainAMP 2 Click

5V 3.3V SPI 12C
UART GPIO PWM AN

A 6-channel programmable gain amplifier. Amplifies up to 32x, in eight discrete steps.

MSRP - \$15° MIKROE-2859



RadioStation Click

5V 3.3V SPI I2C
UART GPIO PWM AN

With the Si4713-B30, the best in class integrated FM broadcast stereo transmitter.

MSRP - \$250 MIKROE-2822



Noise Click

5V 3.3V SPI I2C
UART GPIO PWM AN

With noise detecting circuitry. Enables you to set a noise detection threshold.

MSRP - \$2900 MIKROE-2371



FM Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

Features Si4703 IC and functions as a FM radio tuner. Supports worldwide FM band (76-108 MHz).



GainAMP Click

5V 3.3V SPI 12C UART GPIO PWM: AN

Carries LTC®6912 dual channel, low noise, digitally programmable gain amplifier (PGA).



Mic Click

5V 3.3V SPI 12C UART GPIO PWM AN

With SP00410HR5H-B surface mount silicon microphone with max. RF protection.

MIKROE-2563



MP3 Click

5V 3.3V SPI 12C UART GPIO PWM AN

With a stereo MP3 decoder VS1053. Multiple formats (MP3, MP1, MP2, MPEG4, etc.).

MIKROE-946



2x30W Amp Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

The TPA3128, 2x30-W class-D amplifier with low idle power dissipation, from TI.



AudioAmp 2 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

The TDA7491, a 20W dual BTL class-D audio amplifier IC, from STMicroelectronics.

MSRP - \$2101 MIKROE-3077



SpeakUp Click

5V 3.3V SPI I2C UART GPIO PWM AN

A speech recognition Click. Can recognize over 200 different voice commands.

MSRP - \$3900 MIKROE-1534



SpeakUp 2 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

A speech recognition Click. Set it up to recognize up to 100 commands.

MSRP - \$34⁰¹ MIKROE-2375



AudioAmp 4 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

With the LM4860, an audio amplifier IC capable of delivering up to 1W of continuous power to an 8om load.

MSRP - \$17⁰ MIKROE-3271



AudioMUX Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Two-band digitally controlled high-quality audio processor with BASS ALC feat. and a 4-channel input selector.

MSRP - \$4900 MIKROE-3344



Ammeter Click

5V 3.3V SPI 12C UART GPIO PWM AN

With circuitry for measuring electric current (AC and DC). 0.1A-1A measurement range.



C Meter Click

3.3V SPI 12C UART GPIO PWM AN

Circuitry for measuring the value of capacitors. Based on NE-555 timer/ square-wave generator.

MIKROE-2376



Comparator Click

5V 3.3V SPI 12C UART GPIO PWM: AN

Carries LM2903 IC. has two independent precision voltage comparators. 2 mV offset voltage.

MIKROE-1915



DAC Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

Includes a 12-bit Diqital-to-Analog Converter MCP4921 form Microchip.

MSRP - \$1800 MIKROE-950



DAC 2 Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

Carries LTC2601CDD. a 16-bit digital-to-analog converter from Linear Technology.



DAC 3 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Carries Microchip's MCP4726 IC, a 12-bit digital-to-analog converter.

MSRP - \$1800 MIKROE-2038



DIGI POT Click

 5V
 3.3V
 SPI
 I2C

 UART
 GPIO
 PWM
 AN

Carries MCP416 single-channel 8-bit resolution (256 wiper steps) digital potentiometer.

MSRP - \$16⁹⁰ MIKROE-923



DIGI POT 2 Click

5V 3.3V SPI 12C UART GPIO PWM AN

Carries a single channel digital potentiometer TPL0501 with 256 wiper positions.

MSRP - \$16⁹⁰ MIKROE-2332



ADC 2 Click

5V 3.3V SPI 12C
UART GPIO PWM AN

With MCP3551/3, a 22-bit ADC with automatic internal offset and gain calibration.

MSRP - \$2400 MIKROE-1893



ADC 3 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

With Microchip's MCP3428 16-bit multichannel analog-to-digital converter.

ISRP - \$22⁰⁰ IKR0E-1894



R Meter Click

5V 3.3V SPI I2C
UART GPIO PWM AN

With circuitry for measuring the value of resistors. A wide range of resistors [0-1 Mega Ohm].

MSRP - \$2700 MIKROE-2396



Voltmeter Click

5V 3.3V SPI 12C UART GPIO PWM AN

For measuring voltage in an external electric circuit. Measures direct current [from 0 to 24V].

MSRP - \$240 MIKROE-2436



ADC 4 Click

5V 3.3V SPI 12C
UART GPIO PWM AN

An advanced analog to digital multichannel converter. It can work in 16bit or 24bit mode.

MSRP - \$65⁰⁰ MIKROE-2879



ADC 5 Click

5V 3.3V SPI 12C UART GPIO PWM AN

With a low power, single channel 12-bit CMOS analog to digital converter.

MSRP - \$18⁰⁰ MIKROE-2846



DIGI POT 4 Click

5V 3.3V SPI 12C
UART GPIO PWM AN

A digitally controlled dual potentiometer, with the resistance of $10 \text{K}\Omega$.

MSRP - \$21⁰¹ MIKROE-2873



DIGI POT 5 Click

5V 3.3V SPI 12C
UART GPIO PWM AN

A digitally controlled quad potentiometer, with the resistance of $10 \text{K}\Omega$.

MSRP - \$1690 MIKROE-2863



PIXI™ Click

5V 3.3V SPI 12C
UART GPIO PWM AN

Features proprietary PIXI™ technology. Configurable 20-channel mixed-signal data converter.

MSRP - \$29⁰⁰ MIKROE-2817



Slider Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Features a mechanical slide action potentiometer.

MSRP - \$2400 MIKROE-2702



LEM Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Measures AC and DC current (up to 200 KHz). With LTS 6-NP current transducer.

MSRP - \$59° MIKROE-2553



PAC1934 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Carries PAC1934 four channel DC power/ energy monitor from Microchip.

MSRP - \$29⁰⁰ MIKROE-2735



V to Hz Click

5V 3.3V SPI 12C UART GPIO PWM AN

The TC9400, a voltage-to-frequency and frequency-to-voltage converter from Microchip.




Hz to V Click

5V 3.3V SPI 12C UART GPIO PWM AN

The TC9400, a voltage-to-frequency and frequency-to-voltage converter from Microchip.

MSRP - \$2700 MIKROE-2890



PAC1921 Click

5V 3.3V SPI 12C UART GPIO PWM AN

The PAC1921, a high side power/current monitor from Microchip.

MIKROE-2910



DIGI POT 3 Click

5V 3.3V SPI 12C UART GPIO PWM AN

The AD5321, a 1024-position (10bit) digital potentiometer with a non-volatile memory (EEMEM).

MIKROE-3016



ADC 7 Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

The LTC2500-32. It is a 32bit oversampling ADC with a configurable digital filter, from Analog Devices.



Multimeter Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Has different ICs: amplifiers, NE555 timer, BCD decoder, frequency to voltage converter, and an A/D converter (ADC).

MSRP - \$39° MIKROE-3116



AC Current Click

5V 3.3V SPI I2C UART GPIO PWM AN

Measure alternating currents up to 30A. MCP3201. ADC converter and MCP607 CMOS Op Amp.

MSRP - \$14⁰⁰ MIKROE-2523



ADAC Click

5V 3.3V SPI I2C
UART GPIO PWM AN

It's an 8-channel 12bit ADC, DAC and GPIO. With AD5593R configurable ADC/DAC.

MSRP - \$26⁰⁰ MIKROE-2690



ADC Click

5V 3.3V SPI 12C UART GPIO PWM AN

With Microchip's MCP3204 12-bit Analog-to-Digital converter.

MSRP - \$24⁰⁰ MIKROE-922



ADC 6 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

With the AD7124-8, an 8 channel, low noise, low power, 24bit sigma-delta ADC.

MSRP - \$29⁰⁰ MIKROE-2932



Hz to V 2 Click

5V 3.3V SPI 12C UART GPIO PWM AN

With the VFC32KU, a voltage-to-frequency and frequency-to-voltage converter.

MSRP - \$4200



V to Hz 2 Click

3.3V SPI 12C UART GPIO PWM AN

With the VFC32KU, a voltage-to-frequency and frequency-to-voltage converter.

MSRP - \$4200 MIKROE-3131



PWR Meter Click

3.3V SPI 12C UART GPIO PWM AN

Uses the MCP39F511A, a very sophisticated monitoring IC from Microchip, with 16-bit processing core.

MSRP - \$4200 MIKROE-3169



PWR Meter 2 Click

5V 3.3V SPI 12C UART GPIO PWM AN

Measuring and monitoring voltage up to 24V and current up to 5A. It carries the MCP3910 module.

MIKROE-3150



RMS to DC Click

3.3V SPI 12C UART GPIO PWM AN

With the LTC1968, converter IC, which outputs an analog voltage depending on the RMS value of the input signal.

MSRP - \$3500



MUX Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Equipped with the MUX509, a precise analog multiplexing IC.

MSRP - \$17⁰¹ MIKROE-3247



MUX 2 Click

 5V
 3.3V
 SPI
 I2C

 UART
 GPIO
 PWM
 AN

The MUX508, a modern CMOS analog multiplexing integrated circuit.

MSRP - \$1700 MIKROE-3245



Slider 2 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Utilizes the PTA3043, a linear, high-grade, 10K potentiometer

MSRP - \$20°C MIKROE-3301



5V 3.3V SPI 12C
UART GPIO PWM AN

Current 2 Click

Equipped with an integrated transimpedance amplifying circuit.

MSRP - \$1700 MIKROE-3292



POT 2 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

The MCP1541, a precision voltage reference IC from Microchip is used to provide the voltage of 4.096V.

MSRP - \$1200 MIKROE-3325



Buck-Boost Click

5V 3.3V SPI 12C UART GPIO PWM AN

Features LTC3129-1. a buck-boost DC/DC conversion integrated circuit.

MIKROE-2806



Charger 5 Click

5V 3.3V SPI 12C UART GPIO PWM AN

Designed to charge Lithium-Ion and Lithium-Polymer hatteries.

MIKROE-2848



LED driver 2 Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

Carries the MCP1643 -LED constant current regulator, made by Microchip.

MIKROE-2807




MCP16331 Click

3.3V SPI 12C UART GPIO PWM AN

Functions as a non-inverting buck-boost voltage regulator.

MIKROE-2762



MCP73871 Click

3.3V SPI 12C UART: GPIO: PWM: AN

Integrated solution for system power delivery and Li-Po/Li-Ion battery charge management.



MCP1664 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

With 4 high-power white LEDs. Carries Microchip's MCP1664, a high-voltage step-up LED driver.

MSRP - \$2600 MIKROF-2548



MCP73213 Click

 5V
 3.3V
 SPI
 I2C

 UART
 GPIO
 PWM
 AN

Carries MCP73213 dual-cell Li-lon/Li-Polymer battery charge management controller.

MSRP - \$18⁰⁰ MIKROE-2575



MIC23099 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Carries MIC23099 single AA/AAA cell step-down/ step-up regulator with battery monitoring.

MSRP - \$2900 MIKROE-2765



MIC24045 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Carries MIC24045 5A synchronous stepdown regulator. Input range 4.5V-19V.

MSRP - \$13^t MIKROE-2574



VREG Click

 5V
 3.3V
 SPI
 I2C

 UART
 GPIO
 PWM
 AN

Digitally controlled DC voltage regulator. Based on the wellknown LM317 circuit.

MSRP - \$24⁰⁰ MIKROE-2443



BATT-MAN Click

5V 3.3V SPI I2C
UART GPIO PWM AN

The LTC3586, a high-efficiency power manager with boost, buck-boost, and dual buck converters.

MSRP - \$2700 MIKROE-2901



Charger 2 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

The STBC08, an 800 mA standalone linear Li-lon battery charger with thermal regulation.

MSRP - \$1700 MIKROE-3049



MCP16331 INV Click

5V 3.3V SPI 12C UART GPIO PWM AN

Works in an inverting configuration, provides a negative output voltage in respect to the GND.

MSRP - \$2200 MIKROE-2917




LED Driver 4 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

The TPS61160A, a white LED driver with PWM brightness control.

MSRP - \$1500 MIKROE-3037



LED Driver 3 Click

5V 3.3V SPI I2C UART GPIO PWM AN

The NCP5623B, a triple output RGB LED driver, controlled through the I2C protocol.

MSRP - \$15⁰¹ MIKROE-2950



MIC24055 Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

Equipped with the MIC24055, high-efficiency buck regulator from Microchip.

MIKROE-2835



Qi Receiver Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

Utilizes the principles of the inductive coupling for the purpose of wireless power transfer.

MIKROE-2799



Solar energy Click

5V 3.3V SPI 12C UART GPIO PWM AN

Uses Tl's B025570 - a nano-power high-efficiency boost charger and buck converter device.

MSRP - \$2700 MIKROE-2814



MIC33153 Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

A DC-DC adjustable step-down (buck) converter.

MIKROE-2887



VREG 2 Click

5V 3.3V SPI 12C UART GPIO PWM AN

Uses the LM2596, a 3A. step down voltage regulator working at 150 kHz, from Texas Instruments.



Buck-Boost 2 Click 5V 3.3V SPI 12C

UART GPIO PWM: AN

The LTC3115-2, a 40V, 2A synchronous buck-boost DC/DC converter from Linear Technology.

MIKROE-2963



Boost-INV Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

The LTC3582, programmable boost and inverting DC/DC converter with OTP memory.

MSRP - \$2100 MIKROE-3124



Boost-INV 2 Click

5V 3.3V **SPI** 12C UART: GPIO: PWM: AN

The TPS65131, a positive and negative output DC/DC Converter, from Texas Instruments.

MIKROE-3123



UPS Click

5V 3.3V SPI 12C UART GPIO PWM AN

The LTC3225, a 150mA supercapacitor charger from Linear Technologies.

MIKROE-3001



Nano Power Click

5V 3.3V SPI 12C UART GPIO PWM AN

The MAX17222 - a nanoPower synchronous boost converter with True Shutdown[™] technology.

MSRP - \$1100 MIKROE-3035



BUCK Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Buck switching regulator. A wide input voltage range of up to 40V. Steps it down to 3.3V or 5V.

MSRP - \$280 MIKROF-1592



Buck 2 Click

 5V
 3.3V
 SPI
 I2C

 UART
 GPIO
 PWM
 AN

A powerful step down DC-DC switching regulator. Input voltage range 4.5V-19V.

MSRP - \$16⁰⁰ MIKROE-2858



Buck 3 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Uses the TPS568215, a 4.5V to 17V Input, 8A synchronous step-down SWIFT™ converter.

MSRP - \$220 MIKROE-2971



BUCK 5 Click

5V 3.3V SPI 12C UART GPIO PWM AN

The MAX17506, a high efficiency, synchronous step-down DC/DC converter with internal compensation.

MSRP - \$29⁰⁰ MIKROE-3100



BUCK 6 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Uses the MAX17572, a step down (buck) DC-DC converter from Maxim Integrated.

MSRP - \$18⁰⁰ MIKROE-2957



Boost Click

5V 3.3V SPI 12C
UART GPIO PWM AN

Carries Microchip's MIC2606, a 2MHz, PWM DC/DC boost switching regulator.

MSRP - \$21⁰⁰ MIKROE-2780



BOOST 2 Click

5V 3.3V SPI I2C UART GPIO PWM AN

A DC-DC step-up regulator that has a fixed 5V output.

MSRP - \$15⁰ MIKROE-2894




Boost 4 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Carries TI's TPS61230A, a high efficiency fully integrated synchronous boost converter.

MSRP - \$1700 MIKROE-2757



Nano Power 2 Click

5V 3.3V SPI I2C UART GPIO PWM AN

The MAX4000AUT12+, a nanoPower comparator with built-in reference.

MSRP - \$11⁰⁰ MIKROE-3036



LED driver Click

 5V
 3.3V
 SPI
 I2C

 UART
 GPIO
 PWM
 AN

Carries

MCP1662 high-voltage step-up voltage driver from Microchip.

MSRP - \$15⁰⁰ MIKROE-2676

BUCK 7 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

The MAX17504, a high efficiency, synchronous step-down DC-DC converter with internal compensation.

MSRP - \$2700 MIKROE-3094



Buck 8 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Uses the MAX17536, a high-efficiency, synchronous stepdown DC-DC converter.

MSRP - \$26⁰⁰ MIKROE-2997



Charger Click

5V 3.3V SPI I2C
UART GPIO PWM AN

Carries a battery charger controller and a battery charge monitor, along with a battery connector.

MSRP - \$2200 MIKROE-2033



Smart Buck Click

5V 3.3V SPI I2C
UART GPIO PWM AN

The MIC2230, a dual synchronous step-down DC/DC regulator.

MSRP - \$29° MIKROE-3113



LED-Driver 5 Click

5V 3.3V SPI I2C
UART GPIO PWM AN

The TPS54200, a synchronous buck converter designed to drive monochrome, color, and IR LED arrays.

MSRP - \$1500 MIKROE-3297



Buck-Boost 3 Click

5V 3.3V SPI 12C UART GPIO PWM AN

The ISL85403, a 2.5A requlator with the integrated high-side MOSFET and a low-side driver.

MIKROE-3277



RTC 6 Click

5V 3.3V SPI 12C UART GPIO PWM AN

Carries MCP79410 real-time clock/calendar IC. 64 bytes of battery-backed SRAM.

MIKROE-2063



TIMER Click

5V 3.3V SPI 12C UART GPIO PWM: AN

With DS1682 total elapsed time recorder from Maxim Integrated. ETC used with the ALARM pin.

MIKROE-2333



PULSE Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

A pulse generator with precise frequency control. Features NE555 precision timer.

MIKROE-2032



RTC 2 Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

With DS1307 serial real-time clock. It's a full binary-coded decimal (BCD) clock/calendar.



RTC 3 Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

Carries BQ32000, a real time clock with an integrated trickle charge circuit for automatic switchover.

MIKROE-1839



RTC 4 Click

5V 3.3V SPI 12C UART GPIO PWM AN

Carries DS2417, a real time clock/calendar with a 1-Wire MicroLAN interface. 16.3 kbits per second.

MSRP - \$2100 MIKROE-1891



RTC 5 Click

5V 3.3V SPI 12C UART: GPIO: PWM: AN

Carries Microchip's MCP79510 real-time clock/calendar.

MIKROE-1990



PLL Click

5V 3.3V SPI 12C UART GPIO PWM AN

The ICS501. a LOCO™ PLL clock multiplier, from Integrated Device Technology.




Clock Gen 2 Click

5V 3.3V SPI 12C UART GPIO PWM: AN

The DS1087LU-266, a 3.3V spread-spectrum EconOscillator, from Maxim Integrated.

MSRP - \$1700 MIKROE-3076

mikroBUS standard

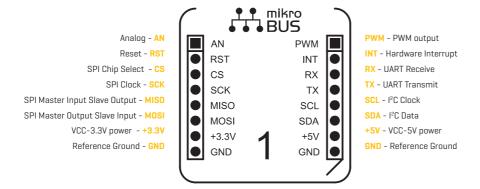

mikroBUS $^{\mathbb{M}}$ is a simple but effective pinout standard containing all the necessary pins to connect all the different Click boards $^{\mathbb{M}}$. There's also a range of mikroBUS $^{\mathbb{M}}$ shields that bring Click board connectivity to all of today's most popular development platforms (Arduino, Raspberry Pi, BeagleBone, Freedom, Discovery, Micro .NET and more).

Clicking on all platforms

Use Click boards™ with your favorite development platform. A range of Shields bring Click connectivity to:

mikroBUS Cape

MSRP – \$8⁹¹ MIKROE-1857

Arduino

Freedom

BeagleBone Black

Launchpad

Raspberry Pi

• Discovery and more...

See them all at: www.mikroe.com/Click/shields





Even though it was printed recently, the booklet you are holding is probably already outdated. That's because we release new Click boards™ weekly, sometimes daily. For the most current list of Click boards™, visit: www.mikroe.com/click



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Development Boards & Kits - Wireless category:

Click to view products by MikroElektronika manufacturer:

Other Similar products are found below:

13237ADC-SFTW 13237ADC-BDM SLWRB4542B SLWRB4546A CC-WMX51-LX DA14586-00F02ATDB-P TWR-13237 TWR-13237-KIT DA14585-00VVDB-P MKR MOTOR CARRIER AC164159 RD-88MW322-R0 RD-88MW320-R0 FMC PCAM ADAPTER NFC TAG 4 CLICK BLE 4 CLICK WRL-16984 K32W-001-T10 SLWRB4179B C METER CLICK HALL CURRENT CLICK COLOR 3 CLICK COMPASS 2 CLICK COMPASS CLICK HDC1000 CLICK RELAY CLICK RFID CLICK RIVERDI CLICK CUGSM113#UFL R METER CLICK MATRIX G CLICK MATRIX RGB CLICK 3D MOTION CLICK 3G SARA CLICK TDGL012 4-20MA R CLICK 4-20MA T CLICK THERMO CLICK MCP2003B CLICK EXPAND 3 CLICK MCP2542 CLICK MCP25625 CLICK ATA663211 CLICK ATA8520-EK3-E TOUCHKEY CLICK MICROSD CLICK TRF CLICK BUTTON R CLICK 12C ISOLATOR CLICK IR ECLIPSE CLICK