



HoLRT系列合金薄膜电阻

| | |
|------|------------|
| 系列号 | HoLRT |
| 修订日期 | 2020-04-27 |
| 版本号 | Ho-A0 |

规格书 Specification

制造商:深圳市毫欧电子有限公司

HoLRT

适用: 本规格书适用于深圳市毫欧电子有限公司HoLRT合金薄膜电阻片式电阻器系列产品选型。

Features


- Low Resistance / TCR / Inductance
- Excellent long-term stability
- High precision current sensing
- High power capability
- Halogen free and lead free
- RoHs compliant

Applications


- Consumer electronics
- Computer & relative products
- Communication devices
- Measuring instrument
- Industrial / Power supply
- Battery management system

Parts Number Explanation

Example:

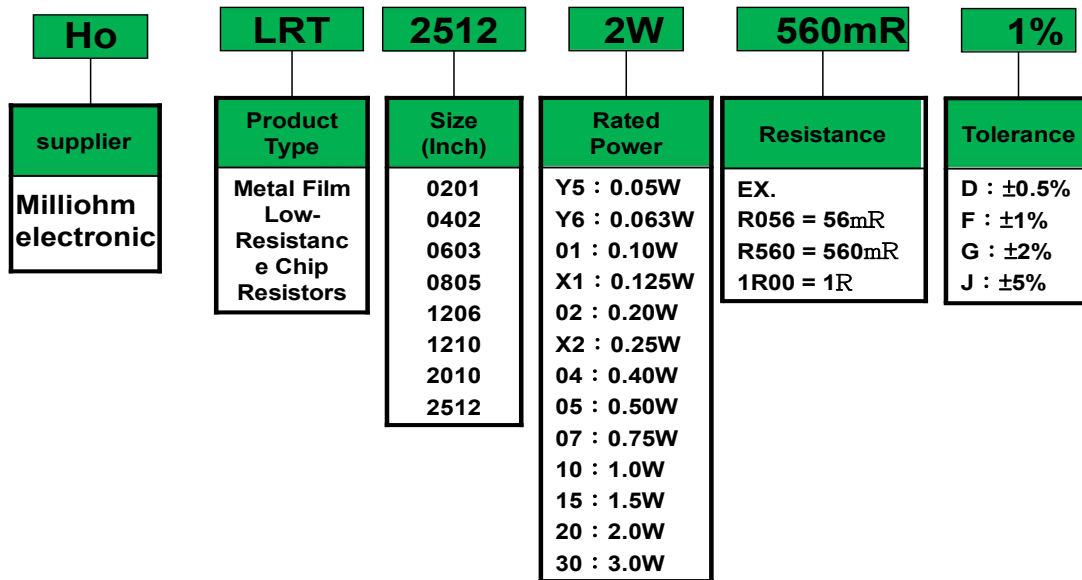

地址: 深圳市龙华新区观澜大布头路南通邦高新产业园 A 栋 8 楼

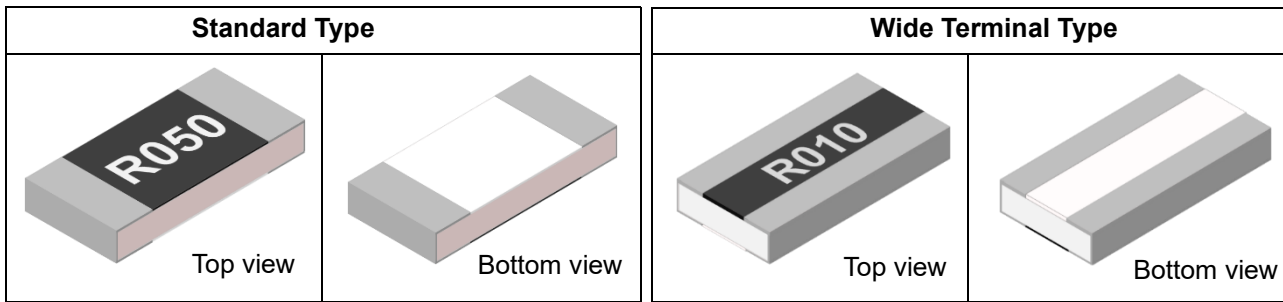

Standard Electrical Specifications—Standard Type

| Type | Rated Power at 70°C | Max. Rated Current | Max. Current | T.C.R. (ppm/°C) | Resistance Range | |
|---------|---------------------|--------------------|--------------|---|-------------------|--|
| | | | | | C(0.25%) | D(0.5%), F(1.0%), G(2.0%), J(5.0%) |
| LRT0201 | 1/20W | 1.00A | 2.50A | ----- ±100 ----- | - | 50 mΩ ≤ R < 100 mΩ ----- 100 mΩ ≤ R ≤ 10 Ω |
| | 1/10W | 1.41A | 3.16A | | | |
| | 1/5 W | 2.00A | 4.47A | | | |
| LRT0402 | 1/16W | 1.12A | 2.80A | ----- ±50 ----- | - | 50 mΩ ≤ R < 100 mΩ ----- 100 mΩ ≤ R ≤ 10 Ω |
| | 1/8W | 1.58A | 3.54A | | | |
| | 1/4W | 2.24A | 5.00A | | | |
| LRT0603 | 1/10W | 1.41A | 3.54A | ----- ±100 ----- | - | 50 mΩ ≤ R < 100 mΩ ----- 100 mΩ ≤ R ≤ 10 Ω |
| | 1/5W | 2.00A | 4.47A | | | |
| | 2/5W | 2.83A | 6.32A | | | |
| LRT0805 | 1/8W | 1.79A | 4.48A | ----- ±150 ----- ----- ±100 ----- ----- ±50 ----- | - | 39 mΩ ≤ R < 50 mΩ ----- 50 mΩ ≤ R < 100 mΩ ----- 100 mΩ ≤ R ≤ 10 Ω |
| | 1/4W | 2.53A | 5.66A | | | |
| | 1/2W | 3.58A | 8.00A | | | |
| LRT1206 | 1/4W | 2.53A | 6.33A | ----- ±150 ----- ----- ±100 ----- | - | 39 mΩ ≤ R < 50 mΩ ----- 50 mΩ ≤ R < 100 mΩ ----- |
| | 1/2W | 3.58A | 8.00A | | | |
| | 1W | 5.06A | 11.32A | | | |
| LRT1210 | 1/2W | 3.58A | 8.95A | ----- ±50 ----- | 470 mΩ ≤ R ≤ 10 Ω | 100 mΩ ≤ R ≤ 10 Ω |
| | 1W | 5.06A | 11.32A | | | |
| LRT2010 | 3/4W | 2.74A | 6.85A | ----- ±50 ----- | 470 mΩ ≤ R ≤ 10 Ω | 100 mΩ ≤ R ≤ 10 Ω |
| | 1.5W | 3.87A | 8.66A | | | |
| LRT2512 | 1W | 3.16A | 7.91A | ----- ±50 ----- | 470 mΩ ≤ R ≤ 10 Ω | 100 mΩ ≤ R ≤ 10 Ω |
| | 2W | 4.47A | 10.00A | | | |
| | 3W | 5.48A | 12.25A | | | |


| Type | Rated Power at 70°C | Max. Rated Current | Max. Overload Current | T.C.R. (ppm/°C) | Resistance Range |
|---------|---------------------|--------------------|-----------------------|-----------------|---------------------------|
| | | | | | F(1.0%), G(2.0%), J(5.0%) |
| LRT1206 | 1/4W | 5.00A | 12.50A | ±200 | 10 mΩ ≤ R < 39 mΩ |
| | 1/2W | 7.07A | 15.81A | | |

Standard Electrical Specifications—Wide Terminal Type

| Type | Rated Power at 70°C | Max. Rated Current | Max. Overload Current | T.C.R. (ppm/°C) | Resistance Range | | | |
|---------|---------------------|--------------------|-----------------------|-----------------|-------------------|------------------|----------|----------|
| | | | | | D (0.5%) | F (1.0%) | G (2.0%) | J (5.0%) |
| LRT0612 | 1W | 10.00A | 22.36A | ±150 | - | 10mΩ ≤ R < 20mΩ | | |
| | | | | ±100 | 100mΩ ≤ R ≤ 500mΩ | 20mΩ ≤ R ≤ 500mΩ | | |
| LRT1020 | 2W | 14.14A | 31.62A | ±150 | - | 10mΩ ≤ R < 20mΩ | | |
| | | | | ±100 | 100mΩ ≤ R ≤ 500mΩ | 20mΩ ≤ R ≤ 500mΩ | | |
| LRT1225 | 3W | 17.32A | 38.73A | ±150 | - | 10mΩ ≤ R < 20mΩ | | |
| | | | | ±100 | 100mΩ ≤ R ≤ 500mΩ | 20mΩ ≤ R ≤ 500mΩ | | |

- For non-standard parts, please contact our sales dept.
- Operating Temperature Range : -55°C ~ +155°C.


Type Dimensions

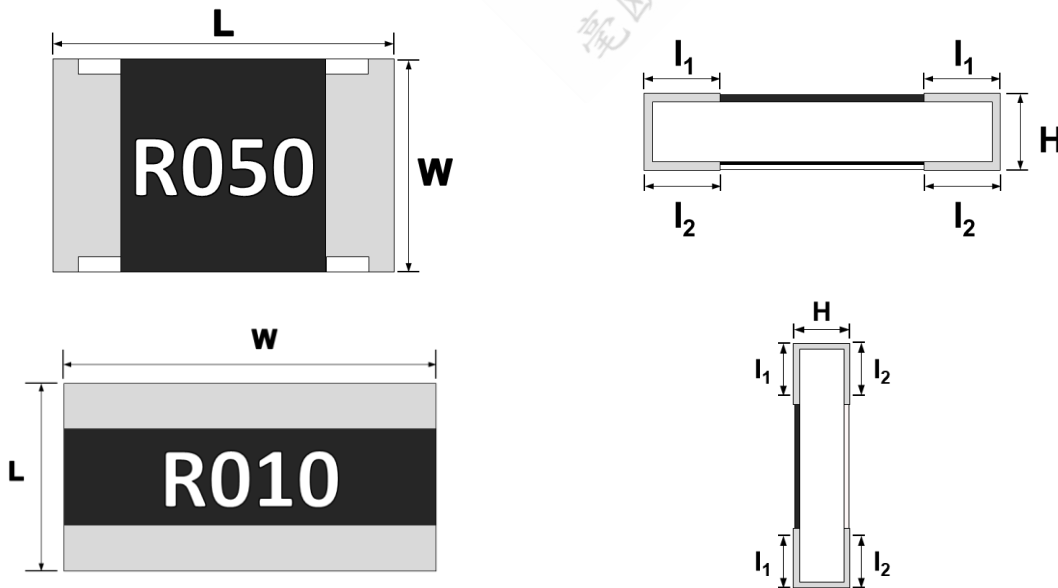

| | |
|------|------------|
| 系列号 | HoLRT |
| 修订日期 | 2020-04-27 |
| 版本号 | Ho-A0 |


Unit : mm

| TYPE | L | W | H | l ₁ | l ₂ |
|-------------|-----------|-----------|-----------|----------------|----------------|
| LRT0201 | 0.60±0.03 | 0.30±0.03 | 0.26±0.05 | 0.15±0.05 | 0.15±0.05 |
| LRT0402 | 1.00±0.10 | 0.50±0.05 | 0.35±0.05 | 0.20±0.10 | 0.25±0.10 |
| LRT0603 | 1.60±0.10 | 0.80±0.10 | 0.45±0.10 | 0.25±0.15 | 0.30±0.15 |
| LRT0805 | 2.00±0.10 | 1.25±0.10 | 0.55±0.10 | 0.35±0.20 | 0.40±0.20 |
| LRT1206 | 3.10±0.10 | 1.60±0.10 | 0.55±0.10 | 0.40±0.20 | 0.45±0.20 |
| LRT1210 | 3.10±0.10 | 2.50±0.15 | 0.55±0.10 | 0.50±0.20 | 0.50±0.20 |
| LRT2010 | 5.00±0.20 | 2.50±0.15 | 0.55±0.10 | 0.60±0.25 | 0.60±0.25 |
| LRT2512 | 6.30±0.20 | 3.20±0.20 | 0.55±0.10 | 0.65±0.25 | 0.65±0.25 |
| LRT2512(3W) | 6.30±0.20 | 3.20±0.20 | 0.70±0.15 | 0.65±0.25 | 0.65±0.25 |
| LRT0612 | 1.60±0.15 | 3.20±0.20 | 0.55±0.15 | 0.30±0.20 | 0.50±0.20 |
| LRT1020 | 2.50±0.15 | 5.00±0.15 | 0.55±0.15 | 0.40±0.20 | 0.50±0.20 |
| LRT1225 | 3.20±0.20 | 6.30±0.20 | 0.55±0.15 | 0.60±0.25 | 0.80±0.25 |

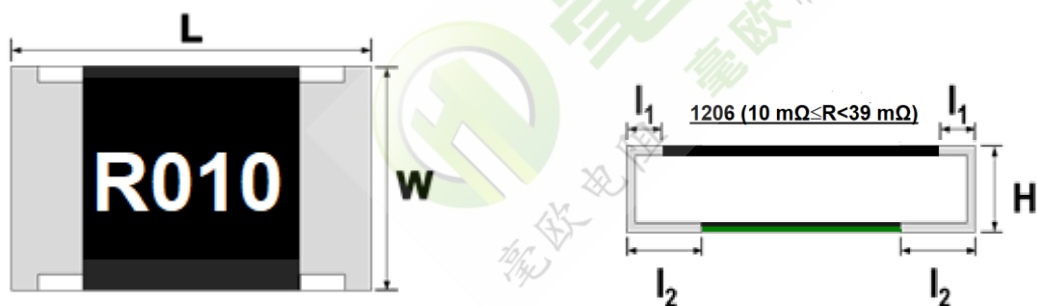

| TYPE | L | W | H | l ₁ | l ₂ |
|--------------------------------|-----------|-----------|----------|----------------|----------------|
| LRT1206 (10 mΩ ≤ R < 39 mΩ) | 3.30±0.20 | 1.70±0.20 | 0.65±0.2 | 0.20±0.15 | 0.68±0.20 |

Construction

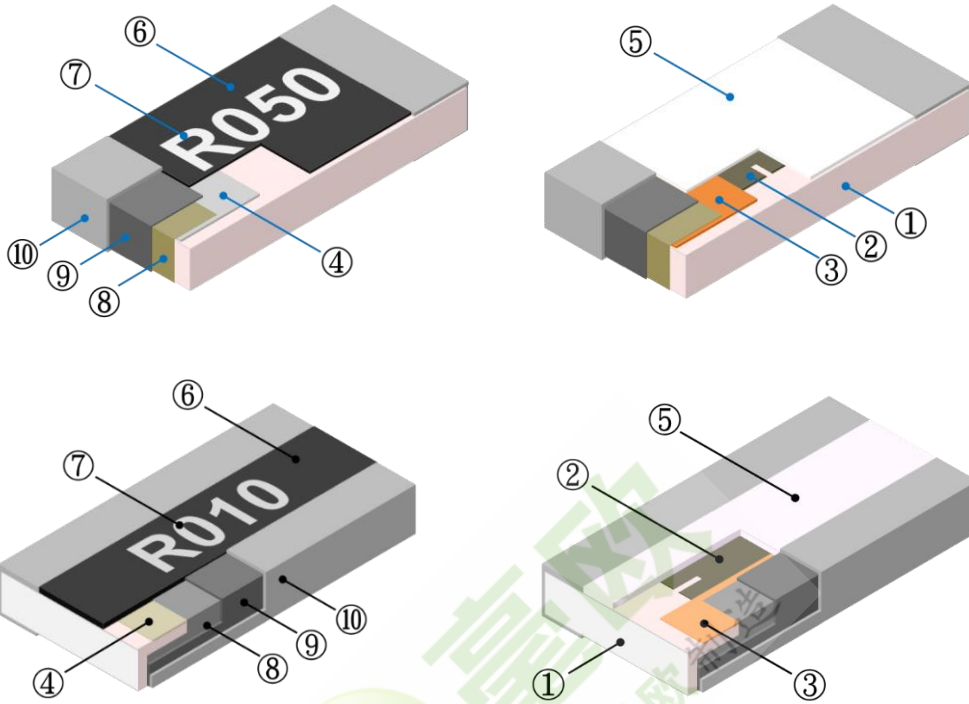

| | | | |
|---|--|---|--------------------------------|
| ① | Alumina Substrate | ⑥ | Top Protective Overcoat |
| ② | Resistive Layer | ⑦ | Marking |
| ③ | Bottom Inner Electrode (Cu) | ⑧ | Side Inner Electrode |
| ④ | Top Inner Electrode | ⑨ | Barrier Layer (Ni) |
| ⑤ | Bottom Protective Overcoat White($\geq 39\text{m}\Omega$) Green($< 39\text{m}\Omega$) | ⑩ | Solder coating (Sn) |


| | |
|------|------------|
| 系列号 | HoLRT |
| 修订日期 | 2020-04-27 |
| 版本号 | Ho-A0 |

Performance Characteristics

Power Derating Curve

The Operating Temperature Range: -55°C ~+155°C.

Power rating or current rating is in the case based on continuous full-load at ambient temperature of 70°C. For operation at ambient temperature in excess of 70°C, the load should be derated in accordance with figure of derating Curve.

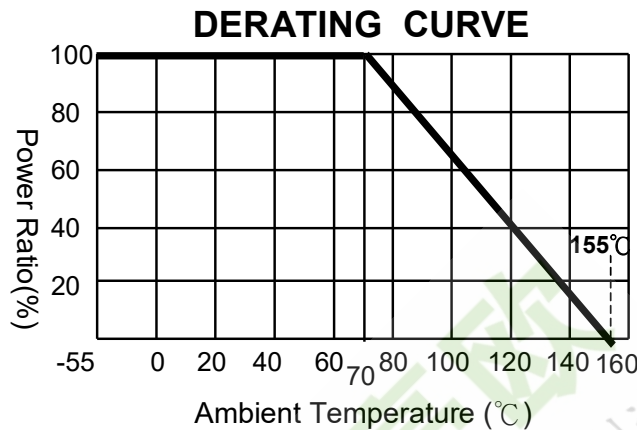

Rated Current

Resistance Range: <math><1\Omega</math>

Rated Current: The resistor shall have a DC continuous working current or a AC (rms) continuous working current at commercial-line frequency and wave form corresponding to the power rating, as determined formula as following:

$$I = \sqrt{P/R}$$

I = Rated current (A)
 P = Rated Power (W)
 R = Resistance(Ω)

Rated Voltage

Resistance Range: $\geq 1\Omega$

Rated Voltage: The resistor shall have a DC continuous working voltage or a RMS AC continuous working voltage at commercial-line frequency and wave form corresponding to the power rating, as determined formula as following:

$$V = \sqrt{P \times R}$$

V = Rated voltage (V)
 P = Rated power (W)
 R = Nominal resistance (Ω)



HoLRT系列合金薄膜电阻

| | |
|------|------------|
| 系列号 | HoLRT |
| 修订日期 | 2020-04-27 |
| 版本号 | Ho-A0 |

■ Reliability Tests and Requirements

| Test Item | Test Method | Procedure | Requirements |
|---|---|--|---|
| Temperature Coefficient of Resistance (T.C.R) | JIS-C-5201-1 4.8 IEC-60115-1 4.8 | TCR +125 °C, 25 °C is the reference temperature | Refer to Standard Electrical Specifications |
| Short Time Overload | JIS-C-5201-1 4.13 IEC-60115-1 4.13 | Standard power : 6.25 times rated power whichever is less for 5 seconds. High power (2X/4X) and wide terminal type : 5 times rated power whichever is less for 5 seconds. | ±(1.0%+0.001Ω) |
| Insulation Resistance | JIS-C-5201-1 4.8 IEC-60115-1 4.8 | Apply 100VDC for 1 minute. | ≥10GΩ |
| Dielectric Withstanding Voltage | JIS-C5201-1 4.7 | 0805 / 0612 and above applied 500VAC for 1 minute. 0201 / 0402 / 0603 applied 300VAC for 1 minute. | No short or burned on the appearance. |
| Core Body Strength | JIS-C5201-1 4.15 | Central part pressurizing force : 10N , 10 seconds | No broken |
| Solderability | JIS-C-5201-1 4.17 IEC-60115-1 4.17 | 245±5°C for 3 seconds. | >95% Coverage No Visual damage |
| Resistance to Soldering Heat | JIS-C-5201-1 4.18 IEC-60115-1 4.18 | 260±5°C for 10 seconds. | ±(1.0%+0.001Ω) No Visual damage |
| Leaching | JIS-C-5201-1 4.18 IEC-60068-2-58 8.2.1 | 260±5°C for 30 seconds. | >95% Coverage No Visual damage |
| Rapid Change of Temperature | JIS-C-5201-1 4.19 IEC-60115-1 4.19 | -55°C to +155°C, 300 cycles | ±(1.0%+0.001Ω) No Visual damage |
| Damp Heat with Load | JIS-C-5201-1 4.24 IEC-60115-1 4.24 | 40±2°C, 90~95% R.H. RCWV or Max. working current whichever is less for 1000 hrs with 1.5 hrs "ON" and 0.5 hr "OFF" | ±(1.0%+0.001Ω) |
| Biased Humidity | MIL-STD-202 Method 103 | 1,000 hours; 85°C / 85% RH, 10% of operating power. Measurement at 24±4 hours after test conclusion. | ±(0.5%+0.05Ω) |
| Load Life (Endurance) | JIS-C-5201-1 4.25 IEC-60115-1 4.25.1 | 70±2°C, Rated power, or Max. working current whichever is less for 1000 hrs with 1.5 hrs "ON" and 0.5 hr "OFF" . | ±(1.0%+0.001Ω) |
| High Temperature Exposure | JIS-C5201-1 4.25 IEC 60068-2-2 | At 155±5°C for 1000 +48/-0 hours. | ±(1.0%+0.001Ω) |
| Resistance to Solvent | JIS-C-5201-1 4.29 | The tested resistor be immersed into isopropyl alcohol of 20~25°C for 60 secs. Then the resistor is left in the room for 48 hrs. | ±(1.0%+0.001Ω) No Visual damage |
| Terminal Strength | JIS-C5201-1 4.32 AEC Q200-006 | Pressurizing force for 10 seconds 0201 / 0402 / 0603 : 8N ; 0805 / 0612 and above : 17.7N | No broken |
| Bending Strength | JIS-C-5201-1 4.33 IEC-60115-1 4.33 | Bending once for 5 seconds D : 0201 / 0402 / 0603 / 0805 = 5mm 1206 / 1210 / 0612 = 3mm 2010 / 2512 / 1020 / 1225 = 2mm | ±(1.0%+0.001Ω) No Visual damage |

- Temperature Coefficient of Resistance test to - 55 °C is available on request
- We can also provide AEC-Q200 test reports if required by customers.



毫欧电阻 毫欧制造

HoLRT系列合金薄膜电阻

| | |
|------|------------|
| 系列号 | HoLRT |
| 修订日期 | 2020-04-27 |
| 版本号 | Ho-A0 |


Marking




0201、0402: no marking



0603: 3 digits



0805~2512: 4 digits



0612~1225: 4 digits

LRT0201 and LRT0402 : No marking

LRT0603 : 3 digit marking

1. For E-24 values:

| Resistance value | Code | Example |
|------------------|------|-------------|
| 50mΩ ~ 99mΩ | 0XX | 068 = 68mΩ |
| 100mΩ ~ 990mΩ | RXX | R68 = 680mΩ |
| 1Ω ~ 9.9Ω | XXR | 6R8 = 6.8Ω |
| 10Ω | 10R | 10R = 10Ω |

| | | | | | | | | | | | | | | | | | | | | | | | | |
|------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| E-24 | 10 | 11 | 12 | 13 | 15 | 16 | 18 | 20 | 22 | 24 | 27 | 30 | 33 | 36 | 39 | 43 | 47 | 51 | 56 | 62 | 68 | 75 | 82 | 91 |
|------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|

2. For E-96 values: excluding values 10/11/13/15/20/75 of E-24 series.

● Standard E-96 Values and 0603 Resistance Codes


| | | | | | | | | | | | | | | | | | | | | | | | | |
|---------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| R-Value | 100 | 102 | 105 | 107 | 110 | 113 | 115 | 118 | 121 | 124 | 127 | 130 | 133 | 137 | 140 | 143 | 147 | 150 | 154 | 158 | 162 | 165 | 169 | 174 |
| Code | 01 | 02 | 03 | 04 | 05 | 06 | 07 | 08 | 09 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 |
| R-Value | 178 | 182 | 187 | 191 | 196 | 200 | 205 | 210 | 215 | 221 | 226 | 232 | 237 | 243 | 249 | 255 | 261 | 267 | 274 | 280 | 287 | 294 | 301 | 309 |
| Code | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 | 42 | 43 | 44 | 45 | 46 | 47 | 48 |
| R-Value | 316 | 324 | 332 | 340 | 348 | 357 | 365 | 374 | 383 | 392 | 402 | 412 | 422 | 432 | 442 | 453 | 464 | 475 | 487 | 499 | 511 | 523 | 536 | 549 |
| Code | 49 | 50 | 51 | 52 | 53 | 54 | 55 | 56 | 57 | 58 | 59 | 60 | 61 | 62 | 63 | 64 | 65 | 66 | 67 | 68 | 69 | 70 | 71 | 72 |
| R-Value | 562 | 576 | 590 | 604 | 619 | 634 | 649 | 665 | 681 | 698 | 715 | 732 | 750 | 768 | 787 | 806 | 825 | 845 | 866 | 887 | 909 | 931 | 953 | 976 |
| Code | 73 | 74 | 75 | 76 | 77 | 78 | 79 | 80 | 81 | 82 | 83 | 84 | 85 | 86 | 87 | 88 | 89 | 90 | 91 | 92 | 93 | 94 | 95 | 96 |

● E-96 Multiplier Code

| Code | A | B | C | D | E | F | G | H | X | Y | Z |
|------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|------------------|------------------|------------------|
| Multiplier | 10 ⁰ | 10 ¹ | 10 ² | 10 ³ | 10 ⁴ | 10 ⁵ | 10 ⁶ | 10 ⁷ | 10 ⁻¹ | 10 ⁻² | 10 ⁻³ |

0603 3 digits coding formula for E-96 values as following:

CODING FORMULA



Example: 499 mΩ = 499 x 10⁻³ Ω = 68Z
 68 Z

| | |
|------|------------|
| 系列号 | HoLRT |
| 修订日期 | 2020-04-27 |
| 版本号 | Ho-A0 |

■ LRT0805 ~ LRT2512 : 4 digit marking

First 3 digits are the significant figures, the 4th digit is the multiplier. "R"= decimal point.

Examples:

| Resistance value | Code | Example |
|--|------|--------------|
| 50mΩ ~ 99mΩ (only for 0805,1206,1210) | R0XX | R068 = 68mΩ |
| 100mΩ ~ 990mΩ | RXXX | R680 = 680mΩ |
| 1Ω ~ 9.9Ω | XRXX | 6R80 = 6.8Ω |
| 10Ω | 10R0 | 10R0 = 10Ω |


■ LRT0612 ~ LRT1225 : 4 digit marking

First 3 digits are the significant figures, the 4th digit is the multiplier. "R"= decimal point. Examples:


| Resistance value | Code | Example |
|------------------|------|---------------|
| 10 mΩ ~ 99 mΩ | R0XX | R010 = 10 mΩ |
| 100 mΩ ~ 500 mΩ | RXXX | R100 = 100 mΩ |

■ Recommended Customer Soldering Parameters

■ Wave solder Temperature condition

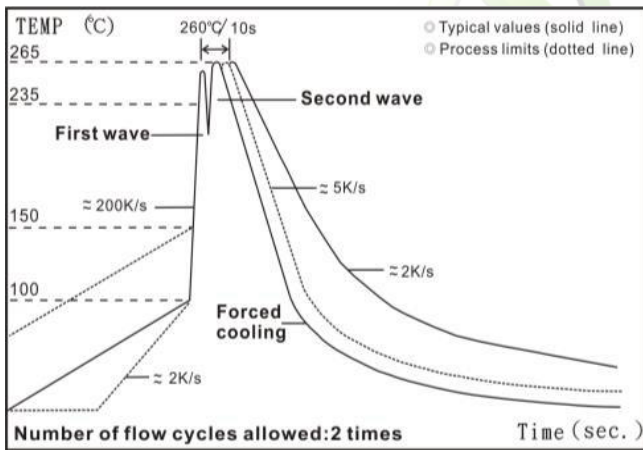

■ Solder reflow Temperature condition

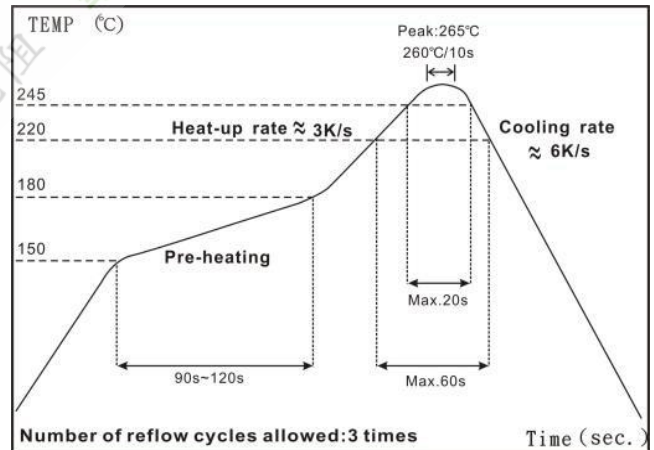


■ Rework temperature (hot air equipment) : 350°C, 3~5seconds


■ Recommended reflow methods

IR, vapor phase oven, hot air oven

If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.

| | | | |
|--|---------------|------|------------|
|  毫欧电阻 毫欧制造 | HoLRT系列合金薄膜电阻 | 系列号 | HoLRT |
| | | 修订日期 | 2020-04-27 |
| | | 版本号 | Ho-A0 |

Recommend Land Pattern Design

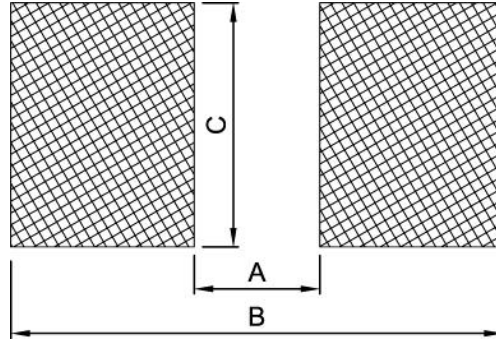

Unit: mm

| TYPE | A | B | C |
|--------------------------------|------|------|------|
| LRT0201 | 0.25 | 0.85 | 0.35 |
| LRT0402 | 0.50 | 1.60 | 0.70 |
| LRT0603 | 0.80 | 2.40 | 1.00 |
| LRT0805 | 1.30 | 2.90 | 1.45 |
| LRT1206 | 2.20 | 4.20 | 1.80 |
| LRT1206 (10 mΩ ≤ R < 39 mΩ) | 1.20 | 4.80 | 1.84 |
| LRT1210 | 2.00 | 4.40 | 2.70 |
| LRT2010 | 3.80 | 6.60 | 2.70 |
| LRT2512 | 4.90 | 8.10 | 3.40 |
| LRT0612 | 0.50 | 2.60 | 3.20 |
| LRT1020 | 1.00 | 4.05 | 5.50 |
| LRT1225 | 1.20 | 5.20 | 7.00 |

Plating Thickness


Ni: ≥ 3 μm

Sn(Tin): ≥ 3 μm

Appendix For SMD Chip Resistor

Packaging Information

Reel Dimensions

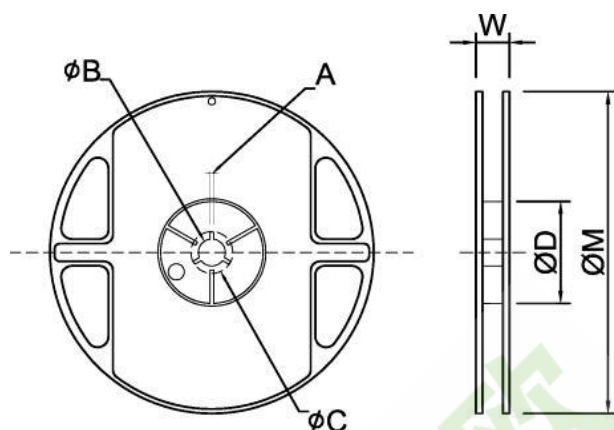


Unit: mm

| TYPE | SIZE | A | ϕB | ϕC | ϕD | W | ϕM |
|---------|-------------|---------|----------|----------|----------|----------|----------|
| LRT0201 | 7" 10K/Reel | 2.0±0.5 | 13.5±1.0 | 21±1.0 | 60±1.0 | 11.5±2.0 | 178±2.0 |
| LRT0402 | 7" 10K/Reel | 2.0±0.5 | 13.5±1.0 | 21±1.0 | 60±1.0 | 11.5±2.0 | 178±2.0 |
| LRT0603 | 7" 5K/Reel | 2.0±0.5 | 13.5±1.0 | 21±1.0 | 60±1.0 | 11.5±2.0 | 178±2.0 |
| LRT0805 | 7" 5K/Reel | 2.0±0.5 | 13.5±1.0 | 21±1.0 | 60±1.0 | 11.5±2.0 | 178±2.0 |
| LRT1206 | 7" 5K/Reel | 2.0±0.5 | 13.5±1.0 | 21±1.0 | 60±1.0 | 11.5±2.0 | 178±2.0 |
| LRT1210 | 7" 5K/Reel | 2.0±0.5 | 13.5±1.0 | 21±1.0 | 60±1.0 | 11.5±2.0 | 178±2.0 |
| LRT2010 | 7" 4K/Reel | 2.0±0.5 | 13.5±1.0 | 21±1.0 | 60±1.0 | 11.5±2.0 | 178±2.0 |
| LRT2512 | 7" 4K/Reel | 2.0±0.5 | 13.5±1.0 | 21±1.0 | 60±1.0 | 16.0±2.0 | 178±2.0 |
| LRT0612 | 7" 5K/Reel | 2.0±0.5 | 13.5±1.0 | 21±1.0 | 60±1.0 | 11.5±2.0 | 178±2.0 |
| LRT1020 | 7" 4K/Reel | 2.0±0.5 | 13.5±1.0 | 21±1.0 | 60±1.0 | 11.5±2.0 | 178±2.0 |
| LRT1225 | 7" 4K/Reel | 2.0±0.5 | 13.5±1.0 | 21±1.0 | 60±1.0 | 16.0±2.0 | 178±2.0 |

| | |
|------|------------|
| 系列号 | HoLRT |
| 修订日期 | 2020-04-27 |
| 版本号 | Ho-A0 |

■ Packaging Information


■ Tapping Specifications

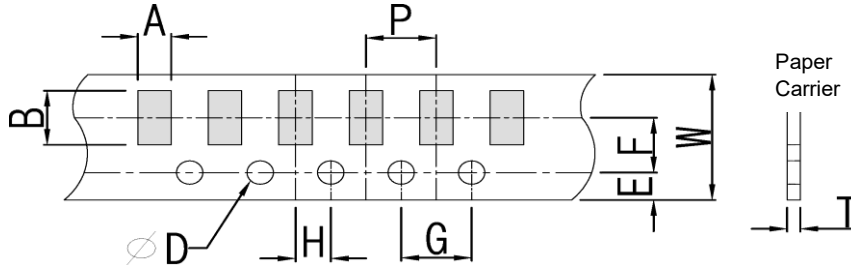

Unit: mm


| Packaging | Type | A | B | W | E | F | G | H | T | ΦD | P |
|------------|------|----------|----------|---------|----------|----------|---------|----------|----------|-----------------------------------|---------|
| Paper Type | 0201 | 0.45±0.1 | 0.75±0.1 | 8.0±0.2 | 1.75±0.1 | 3.5±0.05 | 4.0±0.1 | 2.0±0.05 | 0.35±0.1 | 1.50 ^{+0.1} ₀ | 2.0±0.1 |
| | 0402 | 0.7±0.1 | 1.20±0.1 | 8.0±0.2 | 1.75±0.1 | 3.5±0.05 | 4.0±0.1 | 2.0±0.05 | 0.45±0.1 | | 2.0±0.1 |
| | 0603 | 1.05±0.2 | 1.80±0.2 | 8.0±0.2 | 1.75±0.1 | 3.5±0.05 | 4.0±0.1 | 2.0±0.05 | 0.60±0.1 | | 4.0±0.1 |
| | 0805 | 1.55±0.2 | 2.30±0.2 | 8.0±0.2 | 1.75±0.1 | 3.5±0.05 | 4.0±0.1 | 2.0±0.05 | 0.75±0.1 | | 4.0±0.1 |
| | 1206 | 1.90±0.2 | 3.05±0.2 | 8.0±0.2 | 1.75±0.1 | 3.5±0.05 | 4.0±0.1 | 2.0±0.05 | 0.75±0.1 | | 4.0±0.1 |
| | 1210 | 2.85±0.2 | 3.05±0.2 | 8.0±0.2 | 1.75±0.1 | 3.5±0.05 | 4.0±0.1 | 2.0±0.05 | 0.75±0.1 | | 4.0±0.1 |
| | 0612 | 2.85±0.2 | 3.05±0.2 | 8.0±0.2 | 1.75±0.1 | 3.5±0.05 | 4.0±0.1 | 2.0±0.05 | 0.75±0.1 | | 4.0±0.1 |

■ Embossed Dimensions

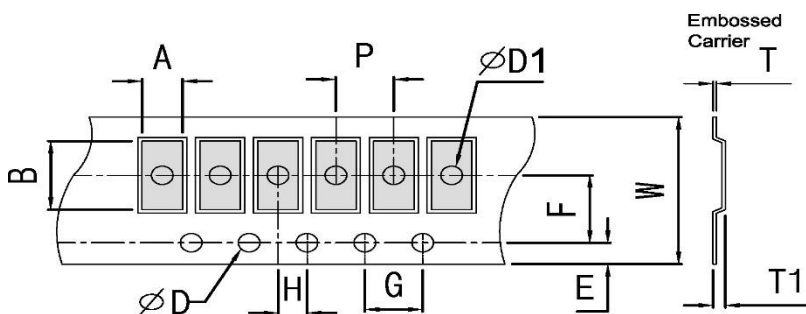


Unit: mm

| Packaging | Type | A | B | W | E | F | G | H | T | ΦD | ΦD1 | T1 | P |
|---------------|------|----------|----------|--------|----------|----------|---------|----------|----------|-----------------------------------|----------|-----------|---------|
| Embossed Type | 2010 | 2.80±0.2 | 5.60±0.2 | 12±0.1 | 1.75±0.1 | 5.5±0.05 | 4.0±0.1 | 2.0±0.05 | 0.23±0.1 | 1.50 ^{+0.1} ₀ | 1.50±0.1 | 0.85±0.15 | 4.0±0.1 |
| | 2512 | 3.40±0.2 | 6.70±0.2 | 12±0.1 | 1.75±0.1 | 5.5±0.05 | 4.0±0.1 | 2.0±0.05 | 0.23±0.1 | | 1.50±0.1 | 0.85±0.15 | 4.0±0.1 |
| | 1020 | 2.80±0.2 | 5.60±0.2 | 12±0.1 | 1.75±0.1 | 5.5±0.05 | 4.0±0.1 | 2.0±0.05 | 0.23±0.1 | | 1.50±0.1 | 0.85±0.15 | 4.0±0.1 |
| | 1225 | 3.40±0.2 | 6.70±0.2 | 12±0.1 | 1.75±0.1 | 5.5±0.05 | 4.0±0.1 | 2.0±0.05 | 0.23±0.1 | | 1.50±0.1 | 0.85±0.15 | 4.0±0.1 |


| | | | |
|--|---------------|------|------------|
|  毫欧电阻 毫欧制造 | HoLRT系列合金薄膜电阻 | 系列号 | HoLRT |
| | | 修订日期 | 2020-04-27 |
| | | 版本号 | Ho-A0 |

■ Packing Material Data / Storage Data

■ Front & Back Lead Dimensions

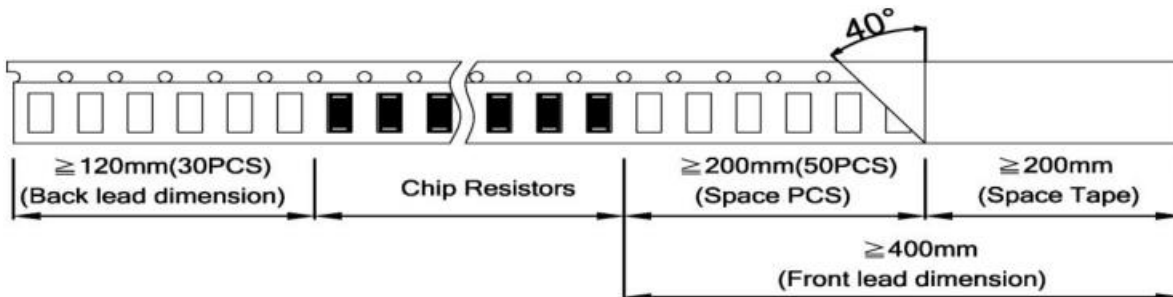


■ Top Adhesive Peel Off Strength : 10~70g

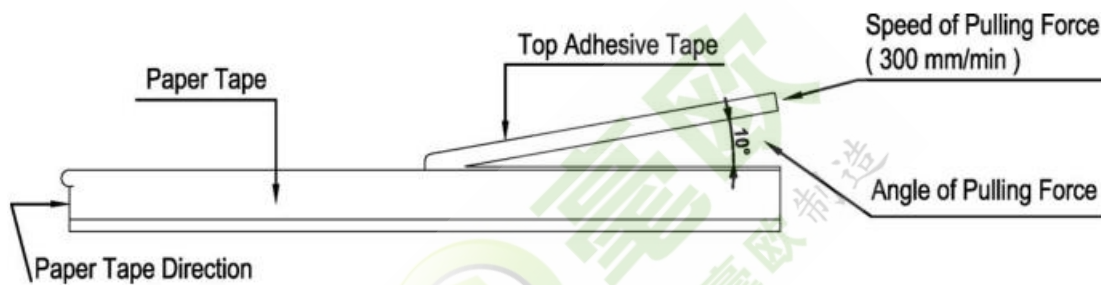


■ Package

| Inner Box Size | |
|----------------|------------|
| Reel | Size H(mm) |
| 1 | 13 |
| 2 | 24 |
| 3 | 36 |
| 5 | 60 |
| 10 | 113 |



| External Box Size | | | |
|-------------------|-------------|------------|------------|
| Contain (Kpcs) | Length (mm) | Width (mm) | Width (mm) |
| 25K | 180 | 180 | 60 |
| 50K | 180 | 180 | 110 |
| 150K | 430 | 200 | 200 |
| 300K | 400 | 400 | 200 |

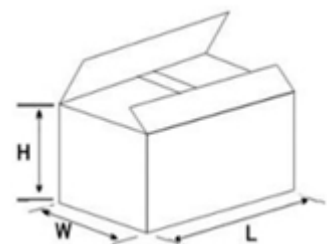

■ Storage Data :

Storage time at the environment temp: $25\pm 5^\circ\text{C}$ & humidity: $60\pm 20\%$ is valid for one year from the date of delivery.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Current Sense Resistors - SMD category](#):

Click to view products by [Milliohm manufacturer](#):

Other Similar products are found below :

[CRL0603-FW-R700ELF](#) [PFS35-200RF1](#) [CD2015FC-0.10-1%](#) [PR2512FKF7W0R004L](#) [RC1005F124CS](#) [RL73K3AR56JTDF](#) [RL7520WT-R001-F](#) [RL7520WT-R009-G](#) [RL7520WT-R020-F](#) [LRC-LR2010LF-01-R033J](#) [LRC-LR2512LF-01-R820J](#) [65709-330](#) [SP1R12J](#) [RL7520WT-R039-G](#) [RL7520WT-R002-F](#) [RL7520WT-R005-F](#) [KRL1632E-C-R200-F-T5](#) [KRL1632E-C-R200-F-T1](#) [Y14880R02000B9R](#) [RLP73M2AR075FTDF](#) [SR731ERTTP5R10F](#) [SR731ERTTP100J](#) [SR731ERTTP6R80F](#) [SR731ERTTP3R9J](#) [SR731ERTTP8R2J](#) [SR731ERTTP2R0J](#) [SR731ERTTP4R7J](#) [SR731ERTTP9R1J](#) [SR731ERTTP1R0J](#) [SR731ERTTP2R2J](#) [SR731ERTTP5R1J](#) [SR731ERTTP6R8J](#) [SR731ERTTP9R10F](#) [FCSL64R007JER](#) [73L4R10G](#) [73L4R75G](#) [73L4R33G](#) [73M1R051F](#) [73WL4R020J](#) [73L2R68J](#) [73L2R22J](#) [73L2R33J](#) [CC1512FC-0.015-5%](#) [ULRG2-2512-R0075-F-LF-SLT](#) [ULR3N-R00075FT2](#) [ULR3N-R0009FT2](#) [SLN3TTED80L6F](#) [JW104X15X4](#) [JW105X19X5](#) [HVR06FTEV2403](#)