


PRODUCT NUMBER: 0868-0-15-20-82-14-11-0

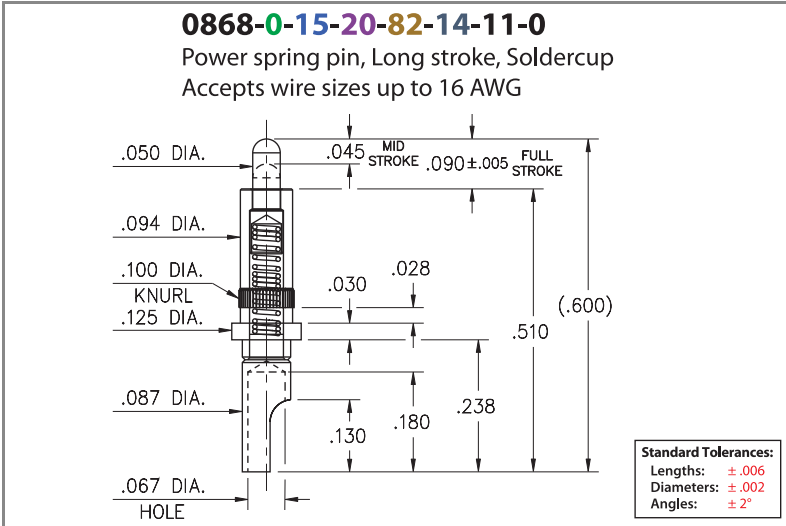

DESCRIPTION

Spring-Loaded Pin with Solder Cup
 Termination

Durability:

100,000 to 1,000,000 Cycles @ Mid-Stroke

Current Rating:

9A @ 10°C Temperature Rise

Contact Resistance:

20 mΩ Max

Operating Temperature Range:

-55/+125° C

Vibration:

No Elect. Discontinuity > 1μs @ 10-2000HZ, 20 G

Shock:

No Elect. Discontinuity > 1μs @ 50g

Mounting Feature:

Wire Mount

Wire Termination:

Soldercup up to 16 AWG

Tail Type: Soldercup

Packaging: 15 - Packaged in Bulk

Shell Plating	Spring Plating	ROHS
----------------------	-----------------------	-------------

20 μ" Gold over Nickel

10 μ" Gold over Nickel




SPRING:

#82 SPRING

**HIGH FORCE SPRING: 120 GRAMS FORCE
@ MID STROKE; .090" FULL STROKE**

Spring Material : Stainless Steel 302
Mid. Stroke : .045" [1,14]
Full Stroke Capability : .090" ± .005" [2,29 ± 0,127]
Force @ Mid. Stroke : 120 g ± 20 g
Initial Force (Pre-Load) : 25 g

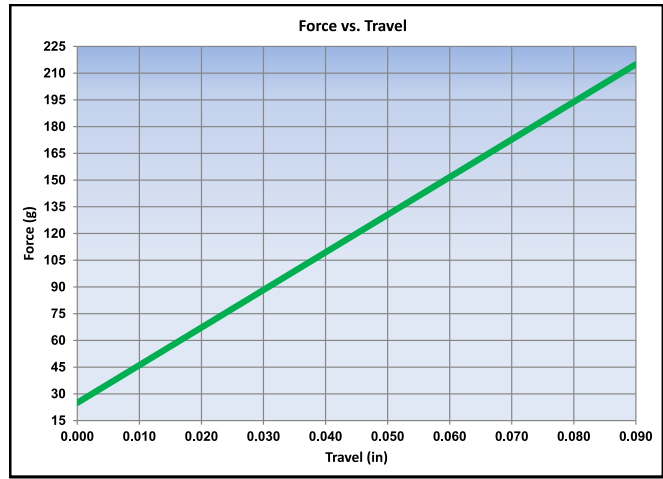

Stroke & force values are measured using spring pins with an internal construction per the design specification.
Individual spring pin performance may vary from these values based on design differences.

Material	Stainless Steel	Grams Force	120
Max Stroke	0.09		

CONTACT MATERIAL:

Stainless Steel 302/304 per ASTM A313

This is an austenitic stainless steel round wire especially for the manufacturing of springs. It is a grade that is age hardenable with superior corrosion resistance.

PHYSICAL PROPERTIES

- Density: 0.29 lb/in³ (8.03 g/cm³)
- Tensile Strength: 325 – 355 ksi

CHEMICAL PROPERTIES (%)

- Carbon: .08 max
- Manganese: 2.00 max.
- Phosphorus: .045 max.
- Sulfur: .030 max.
- Silicon: 1.00 max.
- Chromium: 18.0 – 20.0
- Nickel: 8.0 – 10.5

STANDARD TOLERANCES ON PCB TERMINAL PINS & RECEPTACLES

Diameters +/- .002"
Lengths +/- .005"
Angles +/- 2°

STANDARD TOLERANCES ON SPRING-LOADED PINS

Diameters +/- .002"
Lengths +/- .006"
Angles +/- 2°

ADDITIONAL NOTES & SPECIFICATIONS

In the interest of improved design, quality and performance, Mill-Max reserves the right to make changes in its specifications without prior notice. Specifications and tolerances are provided wherever possible. The tolerance on dimensions of critical to function features is typically held tighter than the stated standard tolerances, such as press-fits, holes and lengths affecting the coplanarity of SMT products. Due to the wide variety of interconnects Mill-Max offers, the specific tolerances vary from product to product. If you need information regarding the tolerance of a particular part, please contact Technical Services.

Phone: 516.922.6000

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Contact Probes](#) category:

Click to view products by [Mill-Max](#) manufacturer:

Other Similar products are found below :

[CT5253](#) [CT5082](#) [100039-033-958](#) [100077-003-0-0](#) [300122-031-1102](#) [R-2-RP-375](#) [S-4-C-5-G S/C](#) [300122-056-0203](#) [SS-75-B-2.4-G](#) [ICT-100-J-17-G](#) [SS-75-C-4.9-D D/C .620 OAL](#) [100165-033-952](#) [100024-002-942](#) [SS-75-E-4.9-D D/C .620 OAL](#) [SX-0-U-2.2-G D/C](#) [101740-028-948](#) [ICT-100-V8-8-G S/C](#) [ICT-075-B-10-G-S S/C](#) [S-2-D-8.3-G D/C](#) [S-2-D-10-G D/C](#) [GSS-19-7-G S/C OAL](#) [ICT-100-T-8-G S/C](#) [GSS-4-7-G S-0-B9-2.5-G S/C](#) [SS-40-J-2.4-G D/C](#) [S-0-A-2.2-D 660 S/C](#) [SS-50-J-3.3-D S/C](#) [S-0-V-3.7-G S/C](#) [SX-2-B-7-G D/C](#) [SX-1-U-6.6-G D/C](#) [SX-1-C-6.6-G D/C](#) [SS-75-D-4.9-D D/C .620 OAL](#) [SS-50-E-2.9-G S/C](#) [SS-40-J-1.8-G-N/L D/C](#) [SS-3-7-G S/C W/HOLE .373 OAL](#) [SS-18-7-G S/C W/HOLE .405 OAL](#) [SS-10-7-G S/C W/HOLE .373 OAL](#) [SS-1-7-G S/C W/HOLE .385 OAL](#) [SHE-5-H-18.7-G](#) [SHE-5-B-18.7-G](#) [SHE-5-A-18.7-G](#) [SHE-3-A-7-G](#) [SH-4-A-10-G S/C](#) [101057-001-952](#) [S-50C-HS-4.3-DG-S](#) [S-5-F-8-G S/C SS SPGS](#) [S-5-F-16.4-G S/C](#) [S-4-E-5-D S/C](#) [S-2-J-8.3-G D/C](#) [S-2-E-10-G D/C](#)