


- All DIP sockets accept 0,38 - 0,64mm dia. and standard IC leads.
- Lubricated contacts also available. (See page 96 for specs.)
- Hi-Rel, 4-finger BeCu #30 clip rated at 3 amps. See page 208 for details.
- Uses Mill-Max #1001 pin. See page 134 for details.

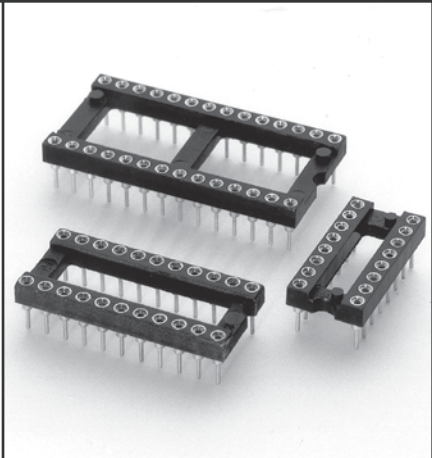

Total number of pins				Quantity per tube	Ordering Information			
	A	B	C					

10	12,6	5,08	7,6	40
4	5,0	7,62	10,1	102
6	7,6	7,62	10,1	67
8	10,1	7,62	10,1	50
10	12,6	7,62	10,1	40
14	17,7	7,62	10,1	28
16	20,3	7,62	10,1	25
18	22,8	7,62	10,1	22
20	25,3	7,62	10,1	20
22	27,8	7,62	10,1	18
24	30,4	7,62	10,1	16
28	35,5	7,62	10,1	14
20	25,4	10,16	12,7	20
22	27,8	10,16	12,7	18
24	30,4	10,16	12,7	16
28	35,5	10,16	12,7	14
32	40,6	10,16	12,7	12
24	30,5	15,24	17,7	16
28	35,5	15,24	17,7	14
32	40,6	15,24	17,7	12
36	45,7	15,24	17,7	11
40	50,8	15,24	17,7	10
42	53,3	15,24	17,7	9
48	60,9	15,24	17,7	8
50	63,5	15,24	17,7	8
52	66,0	15,24	17,7	7
50	63,5	22,86	25,3	8
52	66,0	22,86	25,3	7
64	81,2	22,86	25,3	6

XX= Plating Code
See Below

For RoHS compliance, select \diamond plating code. For the all gold option (XX=13) also change part number from 110-XX-XXX-41-001000 to 110-13-XXX-41-001100

RoHS
2002/95/EC

- 110-XX-210-41-001000
- 110-XX-304-41-001000
- 110-XX-306-41-001000
- 110-XX-308-41-001000
- 110-XX-310-41-001000
- 110-XX-314-41-001000
- 110-XX-316-41-001000
- 110-XX-318-41-001000
- 110-XX-320-41-001000
- 110-XX-322-41-001000
- 110-XX-324-41-001000
- 110-XX-328-41-001000
- 110-XX-420-41-001000
- 110-XX-422-41-001000
- 110-XX-424-41-001000
- 110-XX-428-41-001000
- 110-XX-432-41-001000
- 110-XX-624-41-001000
- 110-XX-628-41-001000
- 110-XX-632-41-001000
- 110-XX-636-41-001000
- 110-XX-640-41-001000
- 110-XX-642-41-001000
- 110-XX-648-41-001000
- 110-XX-650-41-001000
- 110-XX-652-41-001000
- 110-XX-950-41-001000
- 110-XX-952-41-001000
- 110-XX-964-41-001000

For Lubricated Contacts, change part number from 110-XX-XXX-41-001000 to 110-99-XXX-41-361000 (To be used with "99" plating code only)

SPECIFY PLATING CODE XX=	13 \diamond	91	93	99	41 \diamond	43 \diamond	44 \diamond
Sleeve (Pin)	0,25 μ m Au	5,08 μ m Sn/Pb	5,08 μ m Sn/Pb	5,08 μ m Sn/Pb	5,08 μ m Sn	5,08 μ m Sn	5,08 μ m Sn
Contact (Clip)	0,76 μ m Au	0,25 μ m Au	0,76 μ m Au	5,08 μ m Sn/Pb	0,25 μ m Au	0,76 μ m Au	5,08 μ m Sn

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [IC & Component Sockets](#) category:

Click to view products by [Mill-Max](#) manufacturer:

Other Similar products are found below :

[0066-3-17-15-30-14-02-0](#) [670](#) [672](#) [673](#) [694-13-640-00-672-000](#) [712-93-120-41-001000](#) [714-93-104-31-018000](#) [8059-4G1-LF](#) [807-22-001-10-001101](#) [807-22-001-10-006101](#) [807-22-001-30-011101](#) [807-22-001-30-012101](#) [807-22-001-30-013101](#) [807-22-001-30-014101](#) [8-1437531-4](#) [8150-6P10](#) [833-93-034-10-001000](#) [851-41-006-10-001000](#) [851-43-008-20-001000](#) [851-43-014-20-001000](#) [851-93-006-20-001000](#) [851-93-010-20-001000](#) [853-43-020-10-001000](#) [86.010.0053.0](#) [116-43-308-41-007000](#) [PX-68LCC](#) [121-13-318-41-001000](#) [121-13-320-41-001000](#) [121-13-308-41-001000](#) [123-43-314-41-801000](#) [123-43-420-41-001000](#) [123-87-320-41-001101](#) [122-13-316-41-001000](#) [123-13-624-41-001000](#) [123-43-306-41-001000](#) [12-3513-11](#) [123-91-320-41-001000](#) [126-43-310-41-002000](#) [AKSUN 37V-T](#) [1437503-9](#) [1437504-1](#) [146-44-308-41-013000](#) [APO-320-G-T](#) [146-43-308-41-012000](#) [160-10-308-00-001000](#) [160-40-320-00-001000](#) [214-99-306-01-670800](#) [232-1270-02-0602](#) [2-382761-4](#) [2-5331677-4](#)