


MAXIMUM SOLUTIONS

Mill-Max Adds New Omniball™ Spring-Loaded Contact Options

Through-hole and solder-cup styles now offered in spring-loaded pins with rolling ball interface

Mill-Max announces new additions to its Omniball™ spring-loaded contact product line with solder tail and solder-cup versions, offering options for different termination requirements. The unique Omniball™ spring-loaded contact (patent pending) features a rolling ball interface, enabling mating components to engage in lateral, rotational and angular alignments while providing optimal electrical, mechanical, and structural reliability.

Joining the original surface mount style Omniball™ contacts are through-hole mount and solder-cup termination styles. There are two new through-hole mount contacts featuring different tail lengths, making them suitable for use on PCB's of various thickness. P/N: 7945-1-15-20-09-14-11-0 has a tail length of .079" (2 mm) while 7945-2-15-20-09-14-11-0 has a .118" (3 mm) long tail.

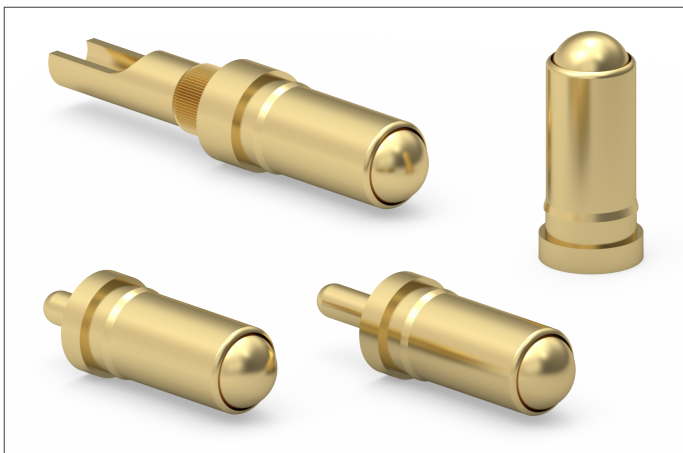

The solder-cup version, P/N: 7949-0-15-20-09-14-11-0, is designed to accept wire sizes up to 20 AWG. It has two press-fit features, a barb, and a knurl, allowing the pin to be pressed in from either direction. The knurl, an anti-rotation press-fit feature, is preferred when maintaining solder-cup alignment is critical.

Omniball™ contacts are spring-loaded pins in which the traditional plunger has been replaced by a gold plated, brass ball. They are designed to simplify and improve the connections made between components which are mated together in a sliding or rotational motion rather than in an axial or vertical orientation. When engaged, the ball

compresses and rolls, allowing the mating surfaces to make contact and then easily slide parallel to each other while spring force acts to ensure consistent electrical contact is maintained. This rolling action alleviates the concerns of connector damage such as binding, premature wearing and structural failure that may occur when using traditional plunger style spring pins in these types of applications.

Features of Omniball™ contacts include: .030" (.762 mm) maximum stroke; gold plating on all components and a .091" diameter ball interface. These spring-loaded pins are durable, they have been tested to 1,000,000 compression cycles and rolled over 67 miles (108 km) at half stroke while still meeting specifications for contact resistance of 20m-ohms max., current rating of 5.5 amps @ 30°C temperature rise and spring force of 55 grams at mid stroke (.015", .381 mm).

Omniball™ contacts are an excellent choice for any application that involves sliding or rotating connections, such as: "twist & lock" cable connectors; smart lens camera connectors; rugged and IP rated connectors including quarter turn and threaded; as well as docking stations, quick connects and blind mating applications.

Contact our technical services staff to discuss your application and how we may be able to address your needs.


For more information, please visit www.mill-max.com/PR700.

SPRING-LOADED PINS

DISCRETE SPRING-LOADED CONTACTS


0981

0981-0-15-20-75-14-11-0
Standard stroke, Surface mount

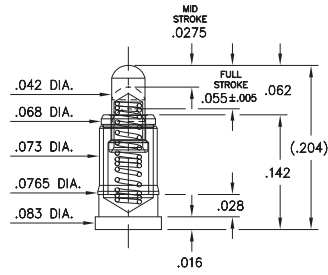


7982

7982-1-15-20-75-14-11-0
Standard stroke
Solder mount in .029 min. mounting hole




7983

7983-1-15-20-75-14-11-0
Standard stroke, Knurl Press-fit in .062 mounting hole. Accepts wire sizes up to 22 AWG

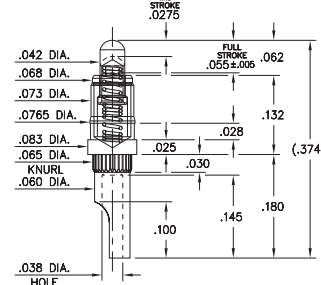


0945

0945-0-15-20-09-14-11-0
Omniball™, Surface mount
For lateral, sliding & rolling contact applications



7945


7945-X-15-20-09-14-11-0
Omniball™, For lateral, sliding & rolling contact applications
Solder mount in .044 min. mounting hole



Basic Part Number	Length A
7945-1	.0787
7945-2	.1181

7949

7949-0-15-20-09-14-11-0
Omniball™, For lateral, sliding & rolling contact applications
Knurl Press-fit in .079 mounting hole. Accepts wire sizes up to 20 AWG

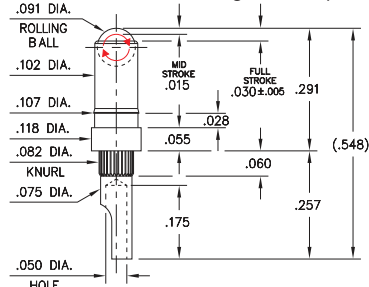

Material Specifications:

Sleeve & Plunger Material: Copper Alloy
Spring Material: Beryllium Copper
Sleeve & Plunger Finish: 20 μ" Gold over Nickel
Spring Finish: 10 μ" Gold over Nickel
Dimensions: Inches
Tolerances On: Lengths: ± .006
Diameters: ± .002
Angles: ± 2°



Mechanical & Electrical Specifications:

Durability: Up to 1,000,000 cycles
Current Rating: 2A continuous, 3A peak,
(09 spring): 3.5A continuous, 5A peak
Contact Resistance: 20 mΩ max.

Environmental Specifications:

Operating temperature range:
-55/+125° C (discontinuous)

09, 75 Springs are not interchangeable

Order Code: XXXX - 0 - 15 - 20 - **XX** - 14 - 11 - 0

Spring Number

Spring Number	Mid. Stroke	Max. Stroke	Force @ Mid. Stroke	Initial Force (Pre-Load)
* 09	.015	.030	55 g	30 g
75	.0275	.055	60 g	25 g



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Contact Probes](#) category:

Click to view products by [Mill-Max](#) manufacturer:

Other Similar products are found below :

[CT5253](#) [CT5082](#) [100039-033-958](#) [100077-003-0-0](#) [300122-031-1102](#) [R-2-RP-375](#) [S-4-C-5-G S/C](#) [300122-056-0203](#) [SS-75-B-2.4-G](#) [S-100-U-10-G-S](#) [SS-75-C-4.9-D D/C .620 OAL](#) [100165-033-952](#) [100024-002-942](#) [SS-75-E-4.9-D D/C .620 OAL](#) [SX-0-U-2.2-G D/C](#) [101740-028-948](#) [ICT-100-V8-8-G S/C](#) [ICT-075-B-10-G-S S/C](#) [S-2-D-8.3-G D/C](#) [S-2-D-10-G D/C](#) [GSS-19-7-G S/C OAL](#) [ICT-100-T-8-G S/C](#) [GSS-4-7-G S-0-B9-2.5-G S/C](#) [SS-40-J-2.4-G D/C](#) [S-0-A-2.2-D 660 S/C](#) [SS-50-J-3.3-D S/C](#) [S-0-V-3.7-G S/C](#) [SX-2-B-7-G D/C](#) [SX-1-U-6.6-G D/C](#) [SX-1-C-6.6-G D/C](#) [SS-75-D-4.9-D D/C .620 OAL](#) [SS-50-E-2.9-G S/C](#) [SS-40-J-1.8-G-N/L D/C](#) [SS-3-7-G S/C W/HOLE .373 OAL](#) [SS-18-7-G S/C W/HOLE .405 OAL](#) [SS-10-7-G S/C W/HOLE .373 OAL](#) [SS-1-7-G S/C W/HOLE .385 OAL](#) [SHE-5-H-18.7-G](#) [SHE-5-B-18.7-G](#) [SHE-5-A-18.7-G](#) [SHE-3-A-7-G](#) [SH-4-A-10-G S/C](#) [101057-001-952](#) [S-50C-HS-4.3-DG-S](#) [S-5-F-8-G S/C SS SPGS](#) [S-5-F-16.4-G S/C](#) [S-4-K-5-G S/C](#) [S-4-E-5-D S/C](#) [S-2-J-8.3-G D/C](#)