


DATA SHEET

PRODUCT NUMBER: 7973-0-15-20-77-14-11-0

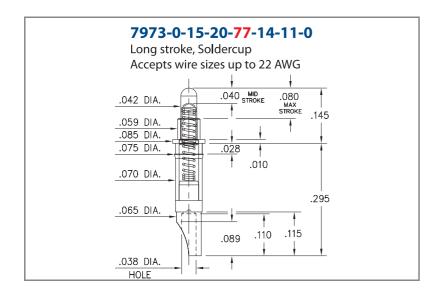

DESCRIPTION

Spring-Loaded Pin with Solder Cup

Termination

Durability:

100,000 to 1,000,000 Cycles

Current Rating:

2A continuous, 3A peak

Contact Resistance:

 $20 \text{ m}\Omega \text{Max}$

Operating Temperature Range:

-55/+125°C (discontinuous)

Vibration:

No Elect. Discontinuity > $1\mu s$ @ 0-200 HZ, 10G

Shock:

No Elect. Discontinuity > 1μs @ 50 G

Mounting Feature:

Soldercup Termination up to 22 AWG Wire

Tail Type: Soldercup

Packaging: 15 - Packaged in Bulk

Shell Plating	Contact Plating	ROHS
20 μ" Gold over Nickel	10 μ" Gold over Nickel	RoHS-2 2011/65/EU

CO	M	т	٨	CI	٠.
LU.	IA		А	U I	

Spring Number	Mid. Stroke	Max. Stroke	Force @ Mid. Stroke	Initial Force (Pre-Load)
71	.0275	.055	60 g	15 g
72	.0275	.055	35 g	15 g
73	.0275	.055	60 g	25 g
74	.0275	.055	50 g	15 g
75	.0275	.055	60 g	25 g
76	.0195	.039	60 g	25 g
77	.045	.090	60 g	25 g
80	.012	.024	70 g	25 g
82	.045	.090	120 g	25 g
83	.045	.090	120 g	25 g
85	.040	.080	60 g	25 g
86	.0275	.055	60 g	25 g

Grams Force 60 Max Stroke 0.09

CERTIFICATE OF COMPLIANCE:

This is to Certify that the product described above is manufactured to Mill-Max quality standards in accordance with all applicable specifications and drawing. Mill-Max certifies this product to be free from defects of materials and workmanship.

This Certificate of Compliance covers the following requirements:

- Dimensional (all features verified to be within tolerances described on the applicable drawing).
- Raw Material (materials and properties verified to be as described on the applicable drawing).
- Plating (platings as required, thickness verified, and performance including solderability per mil-standard).
- Performance (insertion extraction or other force requirements as described on the applicable drawing).

COMPLIANCE STATEMENT FOR ROHS AND ROHS-2

On the restriction of the use of certain hazardous substances in electrical and electronic equipment, for Mill-Max products.

- 1. Directive 2015/863/EU of 31 March 2015 amending Annex II to Directive 2011/65/EU of the European Parliament and of the Council as regards the list of restricted substances.
- 2. Directive 2011/65/EU of the European Parliament and of the Council of 8 June 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (recast)
- 3. Directive 2002/95/EC of the European Parliament and of the Council of January 27 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment.

In reference to the directives described above, Mill-Max Mfg.Corp. certifies that its product labeled as RoHS and RoHS-2 are compliant to the above directives with exemption 6c, (copper alloy containing up to 4% lead by weight). No warranty or liability of indemnification is expressed or implied with this information.

(REACH) COMPLIANCE

 $Compliance\ Statement\ for\ Re\ gistration,\ Evaluation,\ Authorization\ and\ Re\ striction\ of\ Chemicals\ (REACH)$

Reference:

- 1. Regulation EC No 1907/2006 of the European Parliament and of the Council of 18 December 2006, concerning the Registration, Evaluation, Authorization and Restriction of Chemicals (REACH)
- 2. ECHA, Candidate list of Substances of Very High Concern (SVHC) http://echa.europa.eu/reach_en.asp

Mill-Max is aware of the regulation and the SVHC list the EU published (referenced above). Mill-Max does not produce or sell any of the listed substances in their homogeneous form. These substances are not intentionally added during the manufacturing of any Mill-Max products. To our knowledge, our products do not contain the substances described on the ECHA SVHC list. Testing is not performed for materials and substances that were not intentionally added. No warranty, liability of indemnification is expressed or implied with this information. Mill-Max maintains surveillance of the ECHA website to obtain the latest information and periodically reviews the SVHC list for changes and additions.

DRC CONFLICT FREE COMPLIANCE

Compliance Statement for DRC Conflict Free products.

Reference:

- Dodd-Frank Wall Street Reform and Consumer Protection Act, Section 1502, reporting requirements for users of conflict minerals
- "Conflict minerals", are Columbite-tantalite (coltan), cassiterite, gold, wolframite, or their derivatives; or any other mineral or its derivatives determined by the Secretary of State to be financing conflict in the Democratic Republic of the Congo (DRC) or an adjoining country. Metals derived from these minerals are tin, tantalum, tungsten, and gold. By this definition, the only minerals of concern that may be found in Mill-Max products are tin and gold.

Mill-Max Mfg.Corp. here by certifies that its products are manufactured with tin and gold that is derived from material that is considered DRC Conflict Free. Mill-Max provides this assurance as a result of a due diligence process that includes traceability to the source and in some cases the identification of recycled and scrap materials included in the subject material.

© 2019 Mill-Max Mfg. Corp.

190 Pine Hollow Rd, Oyster Bay, NY 11771, USA
Phone: 516.922.6000

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for IC & Component Sockets category:

Click to view products by Mill-Max manufacturer:

Other Similar products are found below:

0066-3-17-15-30-14-02-0 670 672 673 694-13-640-00-672-000 712-93-120-41-001000 714-93-104-31-018000 8059-4G1-LF 807-22-001-10-001101 807-22-001-10-006101 807-22-001-30-011101 807-22-001-30-012101 807-22-001-30-013101 807-22-001-30-014101 8-1437531-4 8150-6P10 833-93-034-10-001000 851-41-006-10-001000 851-43-008-20-001000 851-43-014-20-001000 851-93-006-20-001000 851-93-006-20-001000 851-93-010-20-001000 853-43-020-10-001000 86.010.0053.0 116-43-308-41-007000 PX-68LCC 121-13-318-41-001000 121-13-320-41-001000 123-43-314-41-801000 123-43-420-41-001000 123-87-320-41-001101 122-13-316-41-001000 123-13-624-41-001000 123-43-306-41-001000 12-3513-11 123-91-320-41-001000 126-43-310-41-002000 AKSUN 37V-T 1437503-9 1437504-1 146-44-308-41-013000 APO-320-G-T 146-43-308-41-012000 160-10-308-00-001000 160-40-320-00-001000 214-99-306-01-670800 232-1270-02-0602 2-382761-4 2-5331677-4