


SPECIFICATION FOR APPROVAL

CUSTOMER		CUST P/N.	
ITEM	Data Line Filter	Description	BCB0308WN-301
PART NO.	302-69050	DATE	2017.07.13

(1) DIMENSION(UNIT:mm)

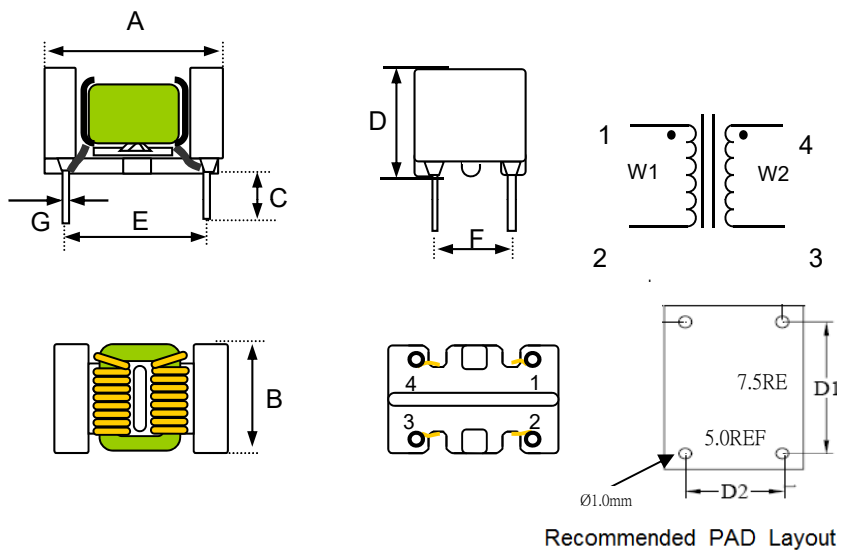

A	10.5MAX	mm
B	7.0 ± 0.5	mm
C	3.5 ± 0.5	mm
D	7.5 (Max)	mm
E	7.5 ± 0.5	mm
F	5.0 ± 0.5	mm
G	Ø0.6(REF)	mm
H		mm

(2) ELECTRICAL REQUIREMENTS

TEST CONDITION	FREQUENCY	VOLTAGE	(3) TEST INSTRUMENTS	
			LCR-METER:	
Z ₁	305 Ω (Min)	25MHz	0.25V	V HP4291A
Z ₂	460 Ω (Min)	100MHz	0.25V	LCR-METER: V HP4291A
DCR	15.0mΩ±20%	KHz	V	CURRENT SOURCE: V WK3260B
L ₁ =L ₂	12.0uH(REF)	100K	1V	V WK3260B V TH2816B
IDC	3.5 A(Max)	MHz	V	GW PUNCTURE INSULATION TESTER V TH2816+1320

(4) TURNS: 7Ts(REF)

(5) MATERIAL LIST

ITEM	MATERIAL	DESCRIPTION	UL NO.
1	CORE	T 7×5×3-C	
2	WIRE	Ø0.4mm×2(2UEW+NY)	E197768
3	BASE	B025	E59481

REMARK:	APPROVED	CHECKED	DRAWN BY
	姜杰文	姜法寶	王艷

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Common Mode Chokes / Filters](#) category:

Click to view products by [MINGSTAR](#) manufacturer:

Other Similar products are found below :

[74279408](#) [PE-62911NL](#) [PE-64683](#) [RD5122-6-9M6](#) [RGCMF1210900H3T](#) [ST6118T-R](#) [FE3X025-10-7NL](#) [T8114NLT](#) [RD5122-10-6M0](#)
[TCM0806G-350-2P-T](#) [TCM0806G-650-2P-T](#) [IND-0110](#) [UAL21VR0802000](#) [UALSC023000000](#) [UALSC1020JH000](#) [UALSC1520JH000](#)
[UALSU10VR15019](#) [UALSU9VD070100](#) [36-00037](#) [5701610000](#) [UALW21HS200290](#) [UALW21HS072450](#) [UALSU9HF050500](#)
[UALSU9H0208000](#) [UAL24VK06450CH](#) [PLT10HH501100PNB](#) [PLT10HH401100PNB](#) [PLT10HH1026R0PNB](#) [PE-67531](#) [TLH10UB 113](#)
[OR5](#) [2752045447](#) [CMS3-11-R](#) [7351V](#) [7408-RC](#) [CMF16-153131](#) [744252510](#) [T8116NLT](#) [CMS2-10-R](#) [DLW44SN101SK2L](#) [FE2X10-4-2NL](#)
[744253200](#) [744253101](#) [744252220](#) [TX8111NLT](#) [UAL30VR3500470](#) [CTX01-19077-R](#) [T8003NLT](#) [CTX01-13663](#) [CTX66-19521-R](#)
[7446630047](#)