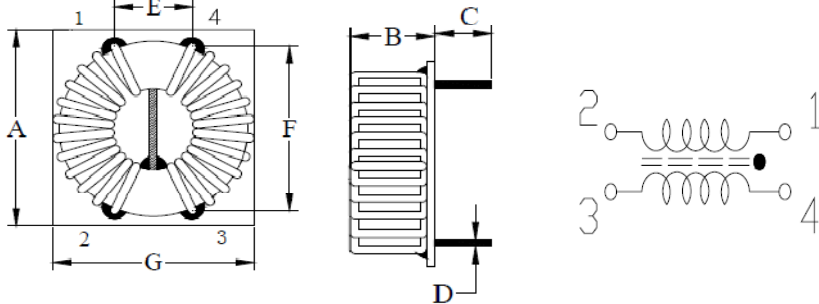


## SPECIFICATION FOR APPROVAL

CUSTOMER		CUST P/N.	
ITEM	Toroidal Coil Inductors	Description	TM120707N-352-P
PART NO.	302-98539	DATE	2019.06.10
<p><b>(1) DIMENSION(UNIT:mm)</b></p>  <p style="text-align: center;">CORE與隔板、底板點黑膠固定</p>			<p><b>A</b>     17.0(Max)    mm</p> <p><b>B</b>     13.0 (Max)    mm</p> <p><b>C</b>     3.5±0.5        mm</p> <p><b>D</b>     Ø0.6±0.1       mm</p> <p><b>E</b>     7.0±0.5        mm</p> <p><b>F</b>     13.0±0.5       mm</p> <p><b>G</b>     17.0(Max)       mm</p> <p><b>H</b>                    mm</p>

(2)ELECTRICAL REQUIREMENTS			
TEST CONDITION		FREQUENCY	(3) TEST INSTRUMENTS
		VOLTAGE	
<b>L</b> <sub>1~2=4~3</sub>	3.5mH(Min)	1KHz    0.25V	V <b>WK3260B</b>
			V <b>TH2816</b>
<b>DCR</b> <sub>1~2=4~3</sub>	60mΩ(Max)	KHz     V	V <b>WK3260B</b>
			V <b>TH2816+1320</b>
<b>IDC</b>	5.0A(Max)	1KHz    0.25V	V <b>TH2816+1320</b>
			V <b>TH2816+1320</b>
		KHz     V	DC RESISTANCE METER:
		MHz     V	CURRENT SOURCE:

**(4)TURN:23TS(REF)**

(5)MATERIAL LIST		
ITEM	MATERIAL	DESCRIPTION
1	CORE	
2	WIRE	
3	隔板	
4	底板	
5	EPOXY	

REMARK:	APPROVED	CHECKED	DRAWN BY
	姜杰文	姜法寶	王艷

## TEST DATA FOR PREPRODUCTION SAMPLES

<b>CUSTOMER:</b>				<b>Part No.</b>	<b>302-98539</b>		<b>Test Q'ty:</b>	<b>10</b>		<b>PCS</b>		
<b>CUST P/N.</b>				<b>Description:</b>	<b>TM120707N-352-P</b>			<b>Date:</b>	<b>2019.06.10</b>			
<b>MEASURE ITEM</b>	$L_{1\sim 2}$ (mH)	$L_{4\sim 3}$ (mH)	$DCR_{1\sim 2}$ (mΩ)	$DCR_{4\sim 3}$ (mΩ)	A (mm)	B (mm)	C (mm)	E (mm)	F (mm)	G (mm)		
<b>SPECIFIC</b>	3.5	3.5	60.0	60.0	17.0	13.0	3.5	7.0	13.0	17.0		
<b>SUGGEST</b>	Min	Min	Max	Max	Max	Max	±0.5	±0.5	±0.5	Max		
1	5.68	5.68	34.60	34.60	16.50	11.02	3.45	7.02	13.02	16.53		
2	5.63	5.63	34.20	34.20	16.30	11.00	3.48	7.03	13.05	16.58		
3	6.02	6.02	34.70	34.70	16.60	10.69	3.42	7.05	13.03	16.59		
4	6.03	6.03	34.20	34.20	16.40	10.89	3.48	7.02	13.06	16.53		
5	6.05	6.05	34.80	34.80	16.20	10.68	3.42	7.10	13.02	16.56		
6	5.96	5.96	34.30	34.30	16.50	10.86	3.45	7.03	13.00	16.58		
7	5.98	5.98	34.80	34.80	16.30	10.96	3.50	7.05	13.02	16.53		
8	6.06	6.06	35.20	35.20	16.50	10.93	3.45	7.03	13.02	16.59		
9	6.09	6.09	35.10	35.10	16.80	11.02	3.42	7.06	13.02	16.62		
10	6.13	6.13	34.50	34.50	16.50	11.00	3.50	7.03	13.05	16.58		
X												
R												
<b>TEST CONDITION</b>	<b>INSTRUMENTS:</b>		WK3260B					<b>AT:</b>	1KHz		0.25V	
	<b>ENVIORNENTS:</b>		TEMP:25 degree HUMDITY :65%									
	<b>STORAGE TEMPERATURE RANGE</b>					-40℃~+125℃						
	<b>OPERATING TEMPERATURE RANGE</b>					-40℃~+125℃						
<b>REMARK:</b>						<b>APPROVED</b>	<b>CHECKED</b>	<b>DRAWN BY</b>				
						姜杰文	姜法寶	王艷				

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Common Mode Chokes / Filters](#) category:*

*Click to view products by [MINGSTAR](#) manufacturer:*

Other Similar products are found below :

[PE-64683](#) [RD5122-6-9M6](#) [RD6137-6-7M5](#) [RD8147-16-3M0](#) [ST6118T-R](#) [FE3X025-10-7NL](#) [RD7147-25-0M7](#) [TCM0806G-350-2P-T](#)  
[TCM0806G-650-2P-T](#) [IND-0110](#) [UAL21VR0802000](#) [UALSC023000000](#) [UALSC1020JH000](#) [UALSU10VD20010](#) [UALSU9VD070100](#) [36-00037](#) [UALW21HS072450](#) [UALSU9H0208000](#) [UAL24VK06450CH](#) [PLT10HH501100PNB](#) [PLT10HH401100PNB](#) [PLT10HH1026R0PNB](#)  
[36-00029-01](#) [PE-67531](#) [TLH10UB](#) [113 0R5](#) [2752045447](#) [7351V](#) [CMF16-153131](#) [RD7147-6-6M0](#) [T8116NLT](#) [FE2X10-4-2NL](#) [36-00029-07](#)  
[T8003NLT](#) [CTX01-13663](#) [CTX66-19521-R](#) [RC212-0.5-10M](#) [RC112-0.4-15M](#) [RC212-0.6-6M8](#) [RC212-0.4-15M](#) [RC112-0.3-30M](#)  
[WTCF2012Z0M751PB](#) [PH9408.814NLT](#) [PAC6006.364NLT](#) [PAC6006.444NLT](#) [PAC6006.204NLT](#) [PH9407.204NLT](#) [PAC6006.264NLT](#)  
[PH9408.105NLT](#) [PH9408.494NLT](#) [PAC6006.104NLT](#)