

Surface Mount Power Splitter/Combiner

AD3PS-1+

3 Way-0° 50Ω 1 to 300 MHz



Generic photo used for illustration purposes only

CASE STYLE: CJ725

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost	
Reel Size	Devices/Reel
7"	10, 20, 50, 100, 200
13"	500

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	0.5W max.
Internal Dissipation	0.25W max.

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

SUM PORT	1
PORT 1	8
PORT 2	5
PORT 3	4
GROUND	2,3,6,7


Outline Drawing

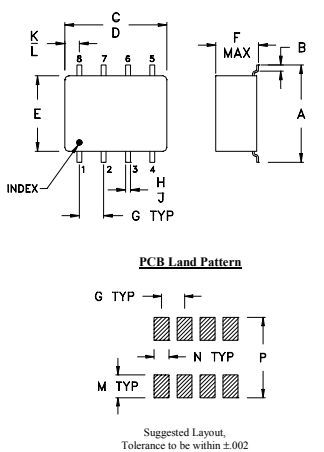

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	
.397	.032	.385	.435	.310	.215	.100	
10.08	0.81	9.78	11.05	7.87	5.46	2.54	
H	J	K	L	M	N	P	wt
.015	.025	.035	.075	.120	.060	.420	grams
0.38	0.64	0.89	1.91	3.05	1.52	10.67	0.45

Demo Board MCL P/N: TB-83 Suggested PCB Layout (PL-063)

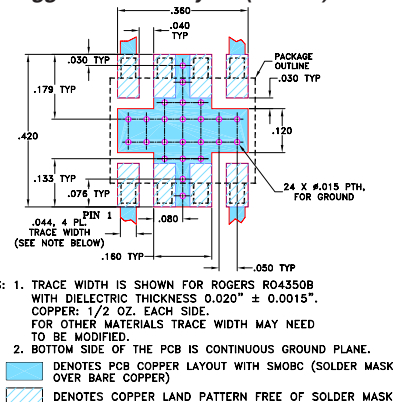

- Notes**
- TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- wideband, 1 to 300 MHz
- high isolation, 35 dB typ.
- good input port matching VSWR, 1.12 typ.
- good output port matching VSWR, 1.14 typ.
- small surface mount package

Applications

- VHF-TV
- aircraft communications

Electrical Specifications




FREQ. RANGE (MHz)	ISOLATION (dB)			INSERTION LOSS (dB) ABOVE 4.8 dB			PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L	M	U	L	M	U	L	M	U	L	M	U
f_L-f_U	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.
1-300	40	23	35	20	27	18	0.3	0.8	0.4	1.0	0.8	1.5
	1	4	6	0.2	0.3	0.5						

L = 1-10 MHz M = 10-150 MHz U = 150-300 MHz

Typical Performance Data

Freq. (MHz)	Total Loss ¹ (dB)			Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	VSWR S	VSWR 1	VSWR 2	VSWR 3
	S-1	S-2	S-3		1-2	1-3	2-3					
1.00	5.15	5.16	5.17	0.01	36.32	40.91	35.31	0.04	1.10	1.24	1.26	1.25
4.00	5.05	5.06	5.06	0.01	42.83	45.40	44.11	0.04	1.04	1.13	1.13	1.13
7.00	5.05	5.06	5.06	0.01	43.56	45.44	46.46	0.09	1.04	1.11	1.12	1.12
10.00	5.06	5.06	5.06	0.01	43.53	45.25	46.58	0.11	1.04	1.11	1.11	1.11
20.00	5.08	5.08	5.09	0.01	42.24	43.79	43.05	0.16	1.04	1.10	1.10	1.11
40.00	5.11	5.12	5.12	0.00	38.90	40.37	37.60	0.35	1.06	1.10	1.10	1.10
60.00	5.14	5.14	5.15	0.01	36.16	37.63	34.33	0.51	1.08	1.10	1.11	1.11
100.00	5.21	5.20	5.21	0.00	32.45	33.97	30.23	0.89	1.12	1.11	1.12	1.12
120.00	5.24	5.24	5.23	0.01	31.12	32.66	28.79	1.05	1.14	1.11	1.12	1.12
200.00	5.42	5.40	5.39	0.03	27.39	29.05	24.87	1.69	1.21	1.14	1.16	1.15
220.00	5.47	5.44	5.42	0.05	26.68	28.34	24.14	1.84	1.23	1.15	1.17	1.16
240.00	5.54	5.50	5.48	0.06	25.96	27.65	23.43	1.93	1.25	1.15	1.18	1.17
260.00	5.63	5.57	5.55	0.08	25.24	26.92	22.74	2.15	1.27	1.16	1.19	1.18
280.00	5.71	5.65	5.63	0.09	24.50	26.14	22.04	2.25	1.29	1.18	1.21	1.19
300.00	5.82	5.74	5.71	0.11	23.71	25.31	21.33	2.39	1.31	1.19	1.23	1.21

1. Total Loss = Insertion Loss + 4.8dB splitter loss.

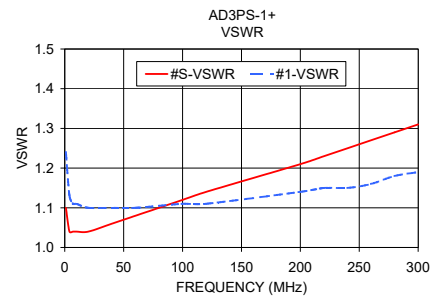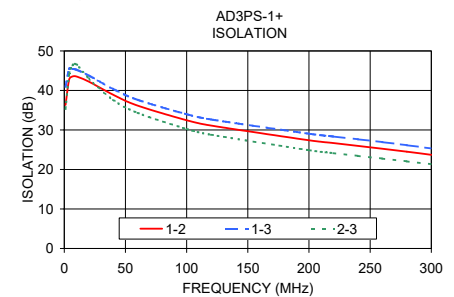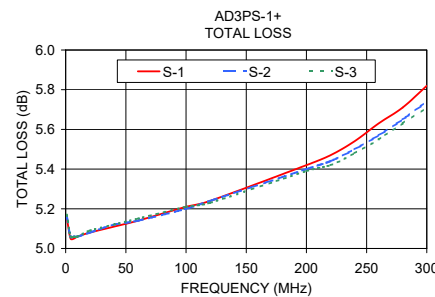

electrical schematic



Notes A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. J
M151107
ED-7781/1
AD3PS-1+
HY/TD/CP/AM
200407
Page 1 of 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [Mini-Circuits](#) manufacturer:

Other Similar products are found below :

[MAPDCC0001](#) [MAPDCC0004](#) [PD0409J5050S2HF](#) [880157](#) [HHS-109-PIN](#) [DC1417J5005AHF](#) [AFS14A30-2185.00-T3](#) [AFS14A35-1591.50-T3](#) [DS-323-PIN](#) [B39321R801H210](#) [1A0220-3](#) [JP510S](#) [LFB212G45SG8C341](#) [LFB322G45SN1A504](#) [LFL182G45TC3B746](#) [SF2159E](#) [30057](#)
[FM-104-PIN](#) [CER0813B](#) [MAPDCC0005](#) [3A325](#) [40287](#) [41180](#) [ATB3225-75032NCT](#) [BD0810N50100AHF](#) [BD2425J50200AHF](#)
[C5060J5003AHF](#) [JHS-115-PIN](#) [JP503AS](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [DC3338J5005AHF](#) [43020](#) [LFB2H2G60BB1C106](#)
[LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#) [10013-20](#) [SF2194E](#) [CDBLB455KCAX39-B0](#) [TGL2208-SM, EVAL](#) [RF1353C](#)
[PD0922J5050D2HF](#) [1E1305-3](#) [1G1304-30](#) [B0922J7575AHF](#) [2020-6622-20](#) [TP-102-PIN](#) [TP-103-PIN](#) [BD1222J50200AHF](#)