

Very High DC Current

# RF Choke

ADCH-1220+

50Ω

5 to 1220 MHz

## The Big Deal

- Very wideband, 5 to 1220 MHz
- Maximum DC current handling capability of 200mA
- Excellent Insertion Loss, .2dB typical
- Good Return Loss, 25 dB typ.
- SMT Package



CASE STYLE: CD637

## Product Overview

The ADCH-1220+ series of RF Chokes achieve very wide bandwidth from 5 up to 1220 MHz. The choke is wound with AWG32 wire, making the maximum continuous current 200mA DC. Excellent Insertion Loss, good VSWR (1.1:1 typ.), flatness and rugged construction make these models ideal solutions for rf-choke applications across a very wide frequency range. These units support a broad range of system and test applications.

## Key Features

Feature	Advantages
Extremely wideband, 5 to 1220 MHz	Ideal for an exceptionally wide variety of lab and system applications.
Excellent Insertion Loss, .2 dB typ. across entire range.	Provides excellent signal transmission from input to output with consistent performance across its entire frequency range.
Good Return Loss, 25 dB typ.	Efficient power utilization with minimal signal power reflected back to source
200mA DC continuous	Ideal for DC injection applications requiring high current levels.
Rugged Construction	Withstands harsh environmental conditions for high reliability and long life of use.

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Very High DC Current RF Choke

50Ω 5 to 1220 MHz

## ADCH-1220+



Generic photo used for illustration purposes only  
CASE STYLE: CD637

**+RoHS Compliant**  
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost  
Reel Size: 13" Devices/Reel: 900

### Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
DC Current	300mA

Permanent damage may occur if any of these limits are exceeded.


### Pin Connections

RF-IN & DC	1
RF GROUND	4
NOT USED	2,3,5,6

### Outline Drawing

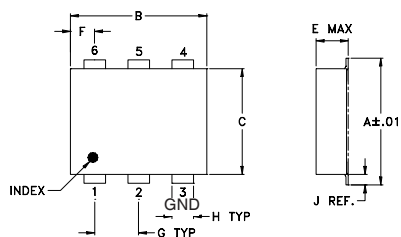

### PBC Land Pattern




### Suggested Layout

Tolerance to be within ±.002

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.272	.310	.220	.100	.206	.055	.100
6.91	7.87	5.59	2.54	5.23	1.40	2.54
H	J	K	L			wt
.030	.026	.065	.300			grams
0.76	0.66	1.65	7.62			0.40

### Demo Board MCL P/N: TB-1167+ Suggested PCB Layout (PL-699)

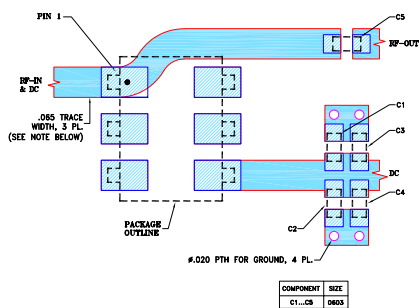

### NOTES:

- TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030±.0015"; COPPER: 1/2 OZ. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- CHIP COMPONENT FOOT PRINTS SHOWN FOR REFERENCE. FOR COMPONENT VALUES REFER TO TB-ADCH-1220+.
- UNIT LAND PATTERN WAS OPTIMIZED FOR BETTER PERFORMANCE.
- BOTTOM COPPER OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

### Features

- low parasitic capacitance 0.1 pf typ.
- effective parallel resistance, Rch 800 ohm typ.
- aqueous washable
- protected by US Patent, 6,133,525

### Applications

- biasing amplifiers
- biasing of laser diodes
- biasing of active antennas



### Electrical Specifications at 25°C

Parameter	Condition (MHz)	Min.	Typ.	Max.	Unit
Insertion Loss	5-10	—	0.3	0.6	dB
	10-1220	—	0.2	0.5	
VSWR*	5-10	—	1.64	1.92	:1
	10-1220	—	1.1	1.29	
DC Current	—	—	—	200	mA
Inductance	@ 0 mA	—	3.4	—	μH

\* tested with circuit shown below, Zo=50 ohms


### Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	RETURN LOSS (dB)
5	0.27	12.78
60	0.21	30.08
120	0.17	32.99
175	0.16	35.80
235	0.15	37.43
350	0.14	39.47
405	0.14	39.60
465	0.14	38.89
525	0.14	37.48
580	0.14	36.84
640	0.13	35.16
755	0.14	32.56
810	0.14	31.50
870	0.14	30.66
930	0.14	29.67
985	0.14	28.84
1045	0.15	27.97
1100	0.15	27.30
1160	0.16	26.60
1220	0.16	26.05

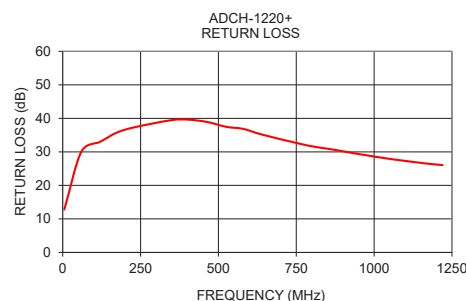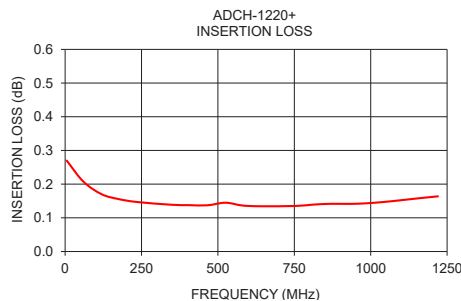

### Electrical Schematic

#### TEST CIRCUIT\*



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Common Mode Chokes / Filters](#) category:*

*Click to view products by [Mini-Circuits](#) manufacturer:*

Other Similar products are found below :

[74279408](#) [PE-62911NL](#) [PE-64683](#) [ST6118T-R](#) [T8114NLT](#) [RD5122-10-6M0](#) [TCM0806G-350-2P-T](#) [TCM0806G-650-2P-T](#) [IND-0110](#)  
[UAL21V07012500](#) [UAL21VR0802000](#) [UAL24VR06500CH](#) [UALSC023000000](#) [UALSC1020JH000](#) [UALSC1520JH000](#)  
[UALSU16VD30030](#) [UALSU16VD40010](#) [UALSU9H0305000](#) [UALSU9HF060300](#) [UALSU9VD070100](#) [36-00037](#) [5701610000](#)  
[UALW21HS072450](#) [UALSU9VD070400](#) [UALSU9HF050500](#) [UALSU9H0208000](#) [UALSCF25081300](#) [UAL24VK06450CH](#)  
[PLT10HH501100PNB](#) [PLT10HH401100PNB](#) [PLT10HH1026R0PNB](#) [PE-67531](#) [EXC-X4CH120X](#) [TLH10UB 113 0R5](#) [2752041447](#)  
[2752045447](#) [CMS3-11-R](#) [7351V](#) [CMF16-153131](#) [744252510](#) [T8116NLT](#) [FE2X10-4-2NL](#) [744253200](#) [744253101](#) [744252220](#) [TX8111NLT](#)  
[UAL30VR3500470](#) [CTX01-19077-R](#) [T8003NLT](#) [CTX01-13663](#)