

# DC Block BNC

## BLK-222-75+


75Ω 10 MHz to 2.2 GHz

### Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
DC Input Voltage	100V Max.

Permanent damage may occur if any of these limits are exceeded.


### Outline Drawing

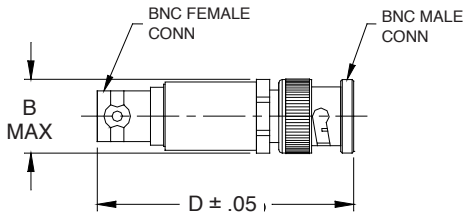

### Outline Dimensions (inch/mm)

B	D	wt.
.62	1.94	grams
15.75	49.28	30.0

### Electrical Schematic

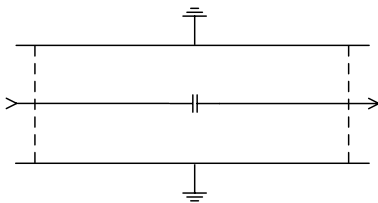

### Features

- low insertion loss
- rugged unibody construction
- off-the-shelf availability

### Applications

- Industrial Microwave & RF
- test and measurement instrumentation
- communication systems
- defense systems



CASE STYLE: FF747

BNC Connectors	Model
Female-Male	BLK-222-75+

### +RoHS Compliant



The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Electrical Specifications at 25°C

FREQUENCY (MHz)	INSERTION LOSS (dB)		RETURN LOSS (dB)	
	Typ.	Max.	Typ.	Min.
10 - 100	0.02	0.10	44	33
100 - 500	0.05	0.20	30	22
500 - 1000	0.08	0.30	25	17
1000 - 2200	0.15	0.70	23	16

### Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	
		Male	Female
10	0.00	41.72	41.71
50	0.01	45.46	45.67
100	0.01	42.05	41.79
200	0.04	36.07	36.30
400	0.08	30.17	30.06
500	0.08	27.98	28.22
600	0.11	26.42	26.92
800	0.09	24.53	25.31
900	0.07	23.89	24.56
1000	0.06	23.63	24.18
1200	0.04	23.05	24.72
1400	0.06	22.50	24.53
1500	0.09	22.75	23.96
1600	0.13	22.67	23.24
1800	0.22	22.68	23.81
1900	0.20	22.18	24.24
2200	0.05	22.13	22.12

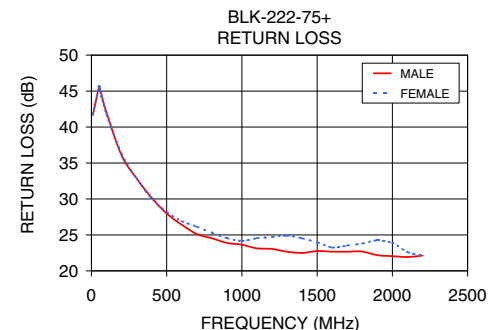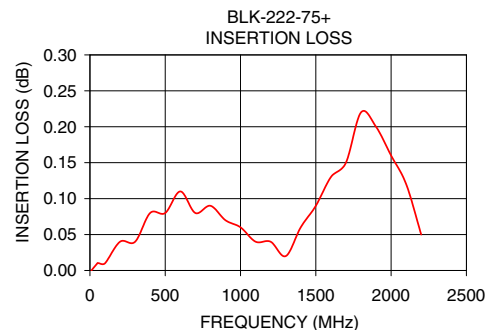

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [RF Connector Accessories](#) category:*

*Click to view products by [Mini-Circuits](#) manufacturer:*

Other Similar products are found below :

[89674-0712](#) [F702RX24](#) [FERRULE-174](#) [R125802000](#) [R141802000](#) [R141805000](#) [R141842000](#) [R161844000](#) [R161862000](#) [R161862000W](#)  
[R280752000](#) [R280907000](#) [R694261906](#) [RFI21-13](#) [RFI375-12-D3](#) [RFI75-13-D2](#) [RFI75-3](#) [RFI75-4-D2](#) [RFI97-13](#) [AX102906](#) [AX102907](#)  
[18097-0013](#) [HP-375](#) [HP-500](#) [2098-0294-00](#) [2098-3251-94](#) [KA-81-05](#) [89674-0805](#) [F1](#) [FERRULE-223](#) [202102-11](#) [213337-1](#) [220222-2](#)  
[24092671A](#) [24092678A](#) [R161841000](#) [R280468000](#) [R280510000](#) [R282862060](#) [RFI155-1](#) [RFI25-12-D3](#) [RFI25-5](#) [RFI25-5-D3](#) [RFI75-12-D2](#)  
[RFI75-2-D2](#) [RFI75-4-D3](#) [RFI77-6](#) [RFI97-14](#) [360HS001M2508M6](#) [4-1532137-4](#)