

Termination N-Type

50Ω

DC to 8000 MHz

KARN-50+



Generic photo used for illustration purposes only

CASE STYLE: LL718

Connectors	Model
N-Type-Male	KARN-50+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings

Operating Temperature -55°C to 100°C

Storage Temperature -55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.


Features

- wideband coverage, DC to 8000 MHz
- useable to 9000 MHz (return loss, 20 dB typ. at 9000 MHz)
- rugged construction
- brass body with trimetal finish

Applications

- cellular communications
- satellite communications
- defense communications
- test set-up

Outline Drawing



Outline Dimensions (inch/mm)

A	B	C	D	E	wt
1.18	0.56	0.67	0.85	0.787	grams
29.97	14.22	17.02	21.59	19.99	30.0



To order KARN-50+ with 3½ length chain and end coupling with .130" diameter mtg. hole, use part no. KARN-50CN+. Price is \$14.95, Qty. (1-9)


Electrical Specifications

FREQUENCY (MHz)	IMPEDANCE (OHMS)	RETURN LOSS (dB) MIN.					POWER RATING* (W)
		DC-.5 GHz	DC-1 GHz	DC-2 GHz	DC-4 GHz	DC-8 GHz	
DC-8000	50	30	30	29	27	20	2

*At 70°C, derate linearly at 0.025W/°C at 100°C.

Typical Performance Data

Frequency (MHz)	Return Loss (dB)
100	46.31
600	46.36
1000	44.26
2000	39.83
3000	37.27
4000	35.14
5000	33.72
6000	34.35
7000	34.72
8000	34.96

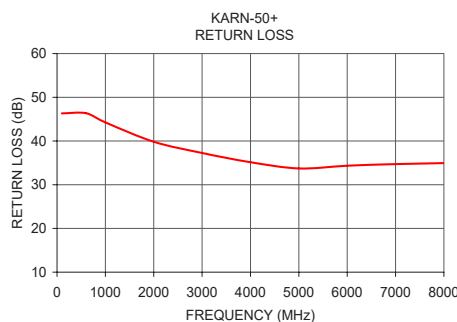

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Terminators](#) category:

Click to view products by [Mini-Circuits](#) manufacturer:

Other Similar products are found below :

[M390303-02N](#) [M39030/3-04S](#) [M39030/3-09S](#) [TNG1-9-78-D3](#) [TNA2-50](#) [TNG1-6-78](#) [TNH1-1-50](#) [R404280000](#) [TNGFL1-1-78](#) [R4042N5000](#)
[R404518000](#) [53S1RR-001N3](#) [142275](#) [56S1RR-001N4](#) [18S15R-0.5E3](#) [65_BNC-50-0-7/133_NE](#) [71S1RR-001N4](#) [02S17R-001D3](#)
[R404240120](#) [R404260000](#) [HT-10-2](#) [M39030/3-04N](#) [TNA1-6-50](#) [131-3801-811](#) [TNA1-1-50](#) [65_N-50-0-51/113_NE](#) [65_N-50-0-1/133_NE](#)
[65002_N-50-1/122_NE](#) [65_MMCX-50-0-31/111_OE](#) [18K15R-0.5E3](#) [2702702](#) [TRM-2161-M0-35M-02](#) [53S17R-001N3](#) [18S24H-40ML5](#)
[TRM-2053-M0-NNN-02](#) [R404759000](#) [M39030/6-02N](#) [TRM-2080-M0-NNN-07](#) [TRM-2053-MC-NNN-02](#) [M39030/3-03S](#) [SF8012-6009](#)
[6701.01.A](#) [65_716-50-0-2/003_-E](#) [65_SMB-50-0-1/111_NE](#) [M39030/3-12N](#) [M39030/5-06N](#) [82-5722-RFX](#) [8018-6174](#) [SF8018-6005](#) [000-46650-51RFX](#)