

# Miniature Ceramic Fixed Attenuator

## PAT-3+

50Ω 1W 3dB DC to 7000 MHz

### Maximum Ratings

|                       |                |
|-----------------------|----------------|
| Operating Temperature | -55°C to 100°C |
| Storage Temperature   | -55°C to 100°C |

Permanent damage may occur if any of these limits are exceeded.

### Pin Connections

|        |     |
|--------|-----|
| INPUT  | 1   |
| OUTPUT | 3   |
| GROUND | 2,4 |

### Features

- wideband, DC to 7000 MHz
- excellent VSWR, through entire band
- miniature size
- aqueous washable

### Applications

- power leveling
- impedance match improvement



Generic photo used for illustration purposes only

CASE STYLE: AF320

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel  
at no extra cost


|           |              |
|-----------|--------------|
| Reel Size | Devices/Reel |
| 7"        | 1000         |

### Electrical Specifications at 25°C

| FREQ. RANGE (MHz)              | ATTENUATION (dB)<br>Flatness, Max. | VSWR (:1)<br>Max. |            |                       | MAX. INPUT POWER (W) |
|--------------------------------|------------------------------------|-------------------|------------|-----------------------|----------------------|
|                                |                                    | DC-1 GHz          | DC-2.5 GHz | DC-f <sub>u</sub> GHz |                      |
| f <sub>L</sub> -f <sub>u</sub> | Norm.                              | DC-1 GHz          | DC-2.5 GHz | DC-f <sub>u</sub> GHz |                      |
| DC-7000                        | 3±0.3                              | 0.3               | 0.5        | 0.9                   | 1                    |

1. RF power at 25°C case temperature: 1 Watt. Derate linearly to 0.1 Watt at 100°C.

### Outline Drawing

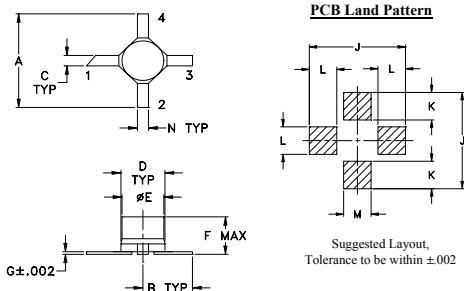


### Outline Dimensions (inch/mm)

| A    | B    | C    | D    | E    | F    | G     |
|------|------|------|------|------|------|-------|
| .200 | .100 | .020 | .070 | .068 | .057 | .005  |
| 5.08 | 2.54 | 0.51 | 1.78 | 1.73 | 1.45 | 0.13  |
| H    | J    | K    | L    | M    | N    | wt    |
| --   | .230 | .065 | .060 | .080 | .040 | grams |
| --   | 5.84 | 1.65 | 1.52 | 2.03 | 1.02 | 0.04  |

### Typical Performance Data

| Frequency (MHz) | Attenuation (dB) | VSWR (:1) |
|-----------------|------------------|-----------|
| 50.00           | 3.13             | 1.03      |
| 796.25          | 3.18             | 1.04      |
| 1542.50         | 3.20             | 1.03      |
| 2288.75         | 3.24             | 1.03      |
| 3035.00         | 3.44             | 1.08      |
| 3781.25         | 3.28             | 1.09      |
| 4527.50         | 3.31             | 1.09      |
| 5273.75         | 3.41             | 1.08      |
| 6020.00         | 3.50             | 1.06      |
| 7015.00         | 3.76             | 1.15      |

### Demo Board MCL P/N: TB-319 Suggested PCB Layout (PL-208)


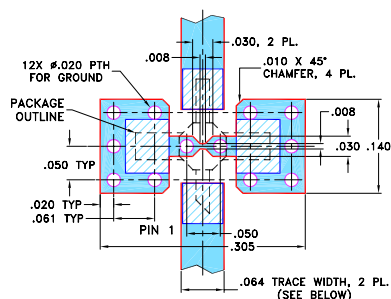


#### NOTES:

1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
  2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

#### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.  
 C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

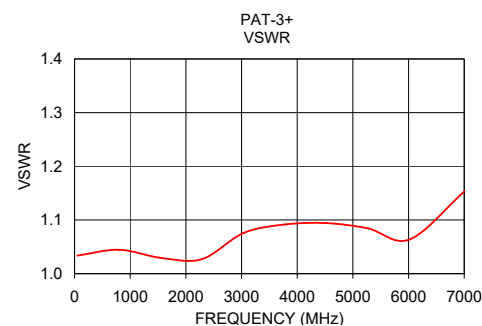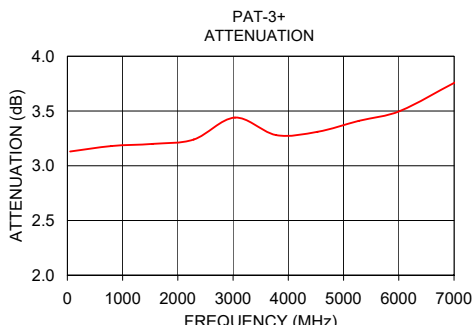

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Attenuators](#) category:*

*Click to view products by [Mini-Circuits](#) manufacturer:*

Other Similar products are found below :

[MAAD-009195-000100](#) [20-50TPC](#) [D10AA5Z4](#) [18AH-01](#) [18AH-08](#) [ATN3580-20](#) [ATN3590-09](#) [MASW-008322-000000](#) [PCAF-10](#) [EXB-24AT9AR5X](#) [ATN3580-10](#) [ATN3590-07](#) [WA04P006XCTL](#) [SKY12408-321LF](#) [ATN3580-07](#) [ATN3580-03](#) [WA04P005XBTL](#) [WA04P007XCTL](#) [MAATSS0018TR-3000](#) [WA04P001XBTL](#) [MAAV-007941-TR3000](#) [WA04P004XBTL](#) [WA04P002XBTL](#) [PAT0816-C-0DB-T5](#) [PAT0816-C-8DB-T5](#) [PAT0816-C-10DB-T5](#) [PAT1632-C-3DB-T1](#) [PAT1632-C-6DB-T1](#) [PAT1632-C-10DB-T1](#) [PAT1632-C-1DB-T1](#) [PAT0816-C-2DB-T5](#) [PAT0816-C-4DB-T5](#) [DHM510-0100-006](#) [MAT10300](#) [MAT10180](#) [D10AA3Z4](#) [MAATCC0007-TB](#) [MAATCC0011](#) [MAATSS0018SMB](#) [PAT0510S-C-0DB-T10](#) [PAT0510S-C-10DB-T10](#) [PAT0510S-C-2DB-T10](#) [PAT0510S-C-3DB-T10](#) [PAT0510S-C-4DB-T10](#) [PAT0510S-C-5DB-T10](#) [PAT0510S-C-6DB-T10](#) [PAT1220-C-2DB-T5](#) [PPA10-20](#) [D10AA30Z4](#) [D10AA2Z4](#)