


Ultra-Small Ceramic Power Splitter/Combiner

QCN-19+

2 Way-90° 50Ω 1100 to 1925 MHz



Generic photo used for illustration purposes only
CASE STYLE: FV1206-1

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost
Reel Size Devices/Reel
7" 20, 50, 100, 200, 500, 1000, 3000

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	15W* max.


* Derate linearly to 7W at 100°C ambient.
Permanent damage may occur if any of these limits are exceeded.

Pin Connections

SUM PORT	1
PORT 1 (0°)	4
PORT 2 (+90°)	6
GROUND	2,5
50 OHM TERM EXTERNAL	3

Product Marking: SC


Outline Drawing

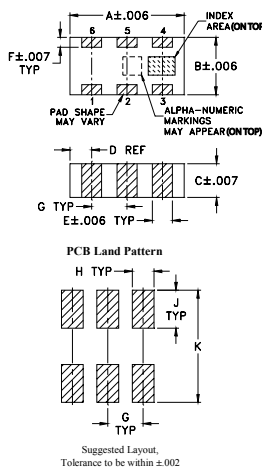

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	wt
.126	.063	.035	.024	.022	.011	.039	.024	.042	.123	grams
3.20	1.60	0.89	0.61	0.56	0.28	0.99	0.61	1.07	3.12	.020

Demo Board MCL P/N: TB-255+ Suggested PCB Layout (PL-131)

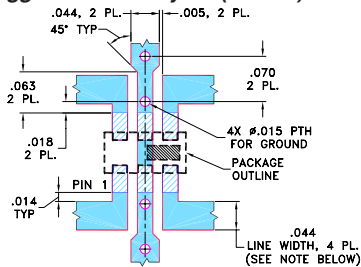

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

Features

- low insertion loss, 0.4 dB typ.
- high isolation, 26 dB typ.
- wrap-around terminal for excellent solderability
- ultra small, 0.12"X0.06"X0.035"
- patent pending

Applications

- GPS
- PCS/DCS
- balanced amplifiers
- modulators

Electrical Specifications




FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) Avg. of Coupled Outputs ABOVE 3 dB		PHASE UNBALANCE (Degrees)		AMPLITUDE UNBALANCE (dB)		VSWR (:1)
	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	
f_L-f_U									Typ.
1100-1925									
1100-1400	25	19	0.4	0.7	1	3	0.4	1.1	1.15
1400-1600	26	20	0.4	0.8	2	4	0.5	1.0	1.2
1600-1925	26	20	0.5	0.9	2	4	0.4	1.1	1.2

1. For applications requiring DC voltage to be applied to the RF ports, add suffix letter "D" to part no.
DC resistance to ground is 100 Mohms min.


Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
1100.00	3.09	3.58	0.49	24.79	89.52	1.10	1.11	1.15
1115.00	3.12	3.54	0.42	24.96	89.64	1.09	1.10	1.14
1145.00	3.15	3.42	0.27	25.45	89.75	1.08	1.10	1.14
1175.00	3.27	3.40	0.13	25.96	89.40	1.07	1.09	1.13
1220.00	3.31	3.34	0.03	26.88	89.94	1.06	1.08	1.12
1265.00	3.38	3.25	0.13	27.82	90.05	1.05	1.07	1.11
1310.00	3.47	3.28	0.19	28.81	89.98	1.04	1.06	1.10
1355.00	3.51	3.19	0.31	29.78	90.12	1.04	1.05	1.09
1400.00	3.54	3.15	0.39	30.74	90.07	1.04	1.04	1.07
1460.00	3.58	3.18	0.39	31.49	90.50	1.04	1.03	1.06
1540.00	3.60	3.14	0.45	31.34	90.65	1.06	1.02	1.04
1580.00	3.61	3.14	0.46	30.69	90.57	1.07	1.02	1.04
1660.00	3.53	3.21	0.32	28.99	90.86	1.10	1.02	1.02
1750.00	3.51	3.36	0.16	27.04	90.76	1.14	1.03	1.01
1925.00	3.21	3.76	0.55	23.71	91.31	1.21	1.06	1.05

1. Total Loss = Insertion Loss + 3dB splitter loss.

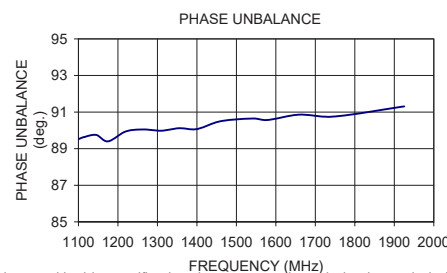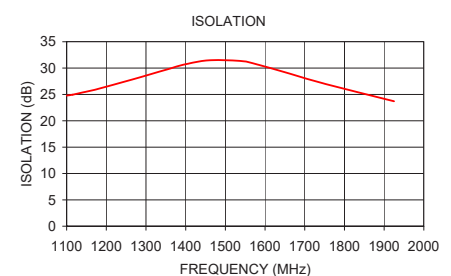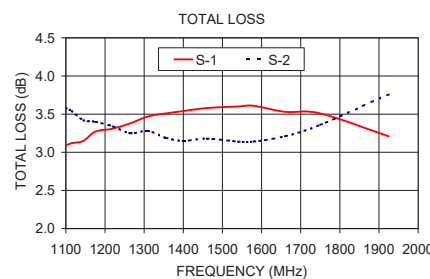

electrical schematic (Note 1)



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [Mini-Circuits](#) manufacturer:

Other Similar products are found below :

[MAPDCC0001](#) [MAPDCC0004](#) [PD0409J5050S2HF](#) [880157](#) [HHS-109-PIN](#) [DC1417J5005AHF](#) [AFS14A30-2185.00-T3](#) [AFS14A35-1591.50-T3](#) [DS-323-PIN](#) [B39321R801H210](#) [1A0220-3](#) [JP510S](#) [LFB212G45SG8C341](#) [LFB322G45SN1A504](#) [LFL182G45TC3B746](#) [SF2159E](#) [30057](#) [FM-104-PIN](#) [CER0813B](#) [MAPDCC0005](#) [3A325](#) [40287](#) [41180](#) [ATB3225-75032NCT](#) [BD0810N50100AHF](#) [BD2425J50200AHF](#) [C5060J5003AHF](#) [JHS-115-PIN](#) [JP503AS](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [DC3338J5005AHF](#) [43020](#) [LFB2H2G60BB1C106](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#) [10013-20](#) [SF2194E](#) [CDBLB455KCAX39-B0](#) [TGL2208-SM, EVAL](#) [RF1353C](#) [PD0922J5050D2HF](#) [1E1305-3](#) [1G1304-30](#) [B0922J7575AHF](#) [2020-6622-20](#) [TP-102-PIN](#) [TP-103-PIN](#) [BD1222J50200AHF](#)