

X3 Frequency Multiplier

50Ω Output 900 to 1200 MHz

RMK-3-122+



Generic photo used for illustration purposes only
CASE STYLE: TT1224

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost

Reel Size	Devices/Reel
7"	10, 20, 50, 100, 200
13"	500

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Input Power	17 dBm

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

INPUT	1
OUTPUT	4
GROUND	2,3,5,6


Outline Drawing

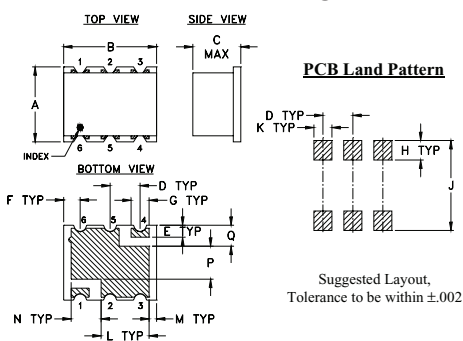

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
.25	.31	.16	.100	.040	.055	.060	.065
6.35	7.87	4.06	2.54	1.02	1.40	1.52	1.65
J	K	L	M	N	P	Q	wt.
.300	.060	.160	.025	.100	.110	.070	grams
7.62	1.52	4.06	0.64	2.54	2.79	1.78	0.16

Demo Board MCL P/N: TB-393 Suggested PCB Layout (PL-258)

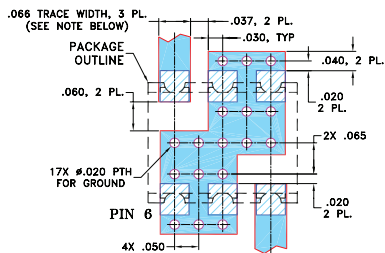

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

Features

- broadband
- low conversion loss, 14.5 dB typ.
- high rejection F2, -48 dBc typ.; F4, -52 dBc typ.
- low cost
- aqueous washable

Applications

- synthesizers
- local oscillators
- satellite up and down converters

Electrical Specifications


MULTIPLICATION FACTOR	FREQUENCY (MHz)		INPUT POWER (dBm)		CONVERSION LOSS (dB)		*HARMONIC OUTPUT (dBC)		
	F1 Input	F3 Output	Min.	Max.	Typ.	Max.	F1 Typ. Min.	F2 Typ. Min.	F4 Typ. Min.
3	300-400	900-1200	0	6	14.5	18	6	-3	48 33 52 40

* Harmonics of input frequency below the power level of F3


Typical Performance Data

Input Frequency (MHz)	INPUT RF= 0 dBm				INPUT RF= 6 dBm			
	Conversion Loss (dB)	Harmonic Output Below F3 (-dBc)			Conversion Loss (dB)	Harmonic Output Below F3 (-dBc)		
		F3	F1	F2		F4	F3	F1
300.00	14.43	5.78	50.39	49.94	15.47	9.19	57.23	51.74
310.00	14.30	5.17	49.76	50.11	15.37	8.56	56.40	51.93
315.00	14.28	4.84	49.36	50.23	15.34	8.24	55.95	52.07
321.00	14.27	4.50	48.88	50.36	15.32	7.89	55.34	52.31
327.00	14.25	4.23	48.56	50.46	15.29	7.63	55.00	52.44
330.00	14.21	4.12	48.41	50.53	15.24	7.52	54.81	52.59
335.00	14.13	3.92	48.15	50.64	15.19	7.29	54.41	52.71
340.00	14.10	3.64	47.81	50.79	15.13	7.02	54.00	52.88
345.00	14.07	3.37	47.61	50.93	15.18	6.71	53.71	53.02
350.00	14.08	3.03	47.35	51.03	15.26	6.29	53.27	53.11
355.00	14.08	2.74	47.10	51.17	15.32	5.96	52.88	53.16
360.00	14.08	2.45	46.82	51.33	15.35	5.65	52.49	53.26
365.00	14.06	2.22	46.25	53.03	15.31	5.56	52.52	53.78
370.00	14.03	2.07	46.18	53.27	15.37	5.32	52.29	53.97
375.00	13.98	1.85	47.96	53.50	15.42	5.01	51.91	54.04
380.00	13.99	1.58	47.75	53.70	15.43	4.74	51.63	54.21
385.00	13.97	1.32	47.64	53.91	15.49	4.40	51.41	54.31
390.00	14.01	1.01	47.48	54.07	15.61	4.02	51.06	54.34
395.00	14.05	0.71	47.30	54.26	15.73	3.66	50.79	54.52
400.00	14.05	0.41	47.11	54.53	15.82	3.26	50.42	54.57


RMK-3-122+
CONVERSION LOSS

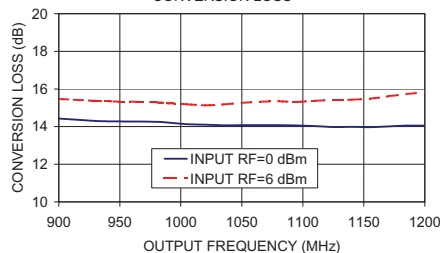


RMK-3-122+
HARMONIC OUTPUT F1

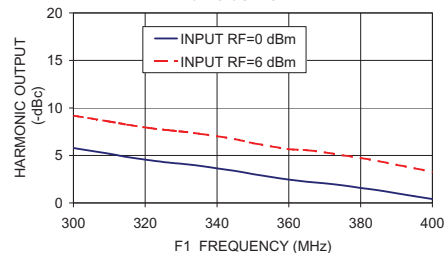

RMK-3-122+
HARMONIC OUTPUT F2

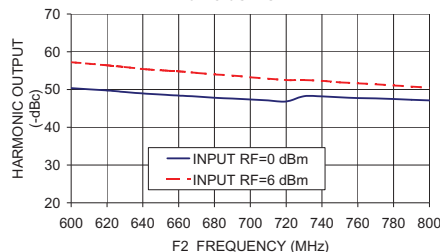

RMK-3-122+
HARMONIC OUTPUT F4

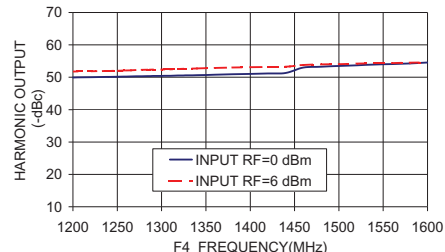

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [Mini-Circuits](#) manufacturer:

Other Similar products are found below :

[MAPDCC0001](#) [MAPDCC0004](#) [PD0409J5050S2HF](#) [HHS-109-PIN](#) [AFS14A35-1591.50-T3](#) [DS-323-PIN](#) [DSS-313-PIN](#) [B39321R801H210](#)
[1A0220-3](#) [JP510S](#) [LFB212G45SG8C341](#) [LFB322G45SN1A504](#) [LFL182G45TC3B746](#) [SF2159E](#) [30057](#) [AFS1575.42S4-T](#) [FM-104-PIN](#)
[CER0813B](#) [MAPDCC0005](#) [3A325](#) [40287](#) [41180](#) [ATB3225-75032NCT](#) [BD0810N50100AHF](#) [JHS-115-PIN](#) [DC0710J5005AHF](#)
[DC2327J5005AHF](#) [43020](#) [LFB2H2G60BB1C106](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#) [10013-20](#) [SF2194E](#)
[CDBLB455KCAX39-B0](#) [TGL2208-SM, EVAL](#) [RF1353C](#) [051157-0000](#) [PD0922J5050D2HF](#) [1E1305-3](#) [1F1304-3S](#) [1G1304-30](#)
[B0922J7575AHF](#) [10017-3](#) [TP-103-PIN](#) [BD1222J50200AHF](#) [BD1722J50100AHF](#) [2450DP39K5400E](#) [BD0810J50150AHF](#)
[BD1722J50200AHF](#)