

4 Way-0° 50Ω 5 to 1300 MHz

The Big Deal

- Wideband, 5 to 1300 MHz
- High isolation, 25 dB
- Good matching VSWR, 1.2:1
- Excellent amplitude unbalance, 0.3 dB



CASE STYLE: DZ943

Product Overview

Mini-Circuits' SCA-4-132+ is a surface-mount 4-way 0° splitter/combiner covering the 5 to 1300 MHz frequency range, supporting bandwidth requirements for cellular, UHF/VHF receivers/transmitters and more. This model can handle up to 0.5W RF input power as a splitter and provides high isolation, good VSWR and low amplitude unbalance. The unit comes housed in a miniature plastic package (0.35 x 0.28 x 0.20") mounted on a 10-lead ceramic base with wrap-around terminations for excellent solderability.

Key Features

Feature	Advantages
Wideband, 5 to 1300 MHz	Suitable for many broadband applications.
Low insertion loss, 1.2 dB	The combination of 0.5W power handling and low insertion loss makes this model a suitable candidate for distributing signals while maintaining excellent transmission of signal power.
Good matching VSWR, 1.2:1	Provides excellent thru-path transmission with low signal reflection.
High isolation, 25 dB	Minimizes interference between input ports.
Low amplitude unbalance, 0.3 dB	Low amplitude unbalance makes this splitter/combiner ideal for parallel path/multichannel systems.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Surface Mount Power Splitter/Combiner

SCA-4-132+

4 Way-0° 50Ω 5 to 1300 MHz



Generic photo used for illustration purposes only

CASE STYLE: DZ943

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	0.5W max.
Internal Dissipation	0.375W max.

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

SUM PORT	3
PORT 1	6
PORT 2	7
PORT 3	9
PORT 4	10
GROUND	1,2,4,5,8

Features

- wideband, 5-1300 MHz
- high isolation, 25 dB typ.
- good matching VSWR, 1.20 typ.
- excellent amplitude unbalance, 0.3 dB typ.

Applications

- cellular
- UHF/VHF receivers/transmitters

+RoHS Compliant


The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel at no extra cost

Reel Size	Devices/Reel
7"	10, 20, 50, 100, 200
13"	500, 1000


Outline Drawing

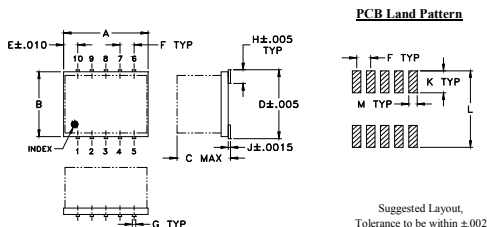

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.30	.250	.190	.266	.050	.050	.012
7.62	6.35	4.83	6.76	1.27	1.27	0.30
H	J	K	L	M		wt
.029	.004	.085	.296	.030		grams
0.74	0.10	2.16	7.52	0.76		0.5

Demo Board MCL P/N: TB-238 Suggested PCB Layout (PL-124)

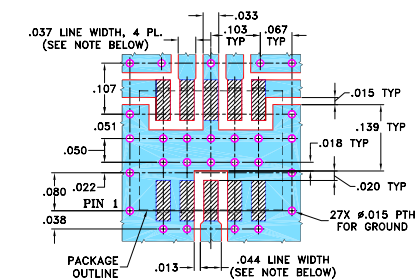

Electrical Specifications

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		5		1300	MHz
Insertion Loss (above theoretical 6.0 dB)	5-500	—	0.8	1.5	dB
	500-1000	—	1.2	2.4	
Isolation	1000-1300	—	2.0	2.8	dB
	5-1000	15	21	—	
Phase Unbalance	1000-1300	13	18	—	dB
	5-500	—	2.0	5	
Amplitude Unbalance	500-1000	—	4.0	11	Degree
	1000-1300	—	8.0	15	
VSWR (Port S)	5-500	—	0.5	0.9	dB
	500-1300	—	0.7	1.2	
VSWR (Port 1-4)	5-500	—	1.22	1.32	:1
	500-1300	—	1.28	1.49	
VSWR (Port 1-4)	5-500	—	1.57	1.79	:1
	500-1300	—	1.40	1.65	

Electrical Schematic



Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp






www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
M155101
SCA-4-132+
WZ/CP/AM
160824
Page 2 of 3

Typical Performance Data

Freq. (MHz)	Total Loss ¹ (dB)				Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	VSWR S	VSWR 1	VSWR 2	VSWR 3	VSWR 4
	S-1	S-2	S-3	S-4		1-2	1-3	2-3						
5	6.40	6.23	6.35	6.50	0.27	27.82	36.68	33.76	0.60	1.05	1.35	1.30	1.28	1.33
10	6.39	6.23	6.34	6.49	0.26	29.62	38.90	34.44	0.27	1.04	1.30	1.25	1.25	1.29
30	6.42	6.26	6.37	6.53	0.27	30.18	39.07	33.10	0.16	1.04	1.28	1.23	1.24	1.28
50	6.44	6.29	6.40	6.56	0.27	30.18	38.82	32.17	0.20	1.05	1.27	1.23	1.23	1.27
70	6.46	6.31	6.43	6.58	0.27	29.96	38.36	31.29	0.19	1.05	1.26	1.22	1.23	1.27
100	6.49	6.34	6.45	6.61	0.27	29.53	37.94	30.15	0.28	1.06	1.26	1.22	1.22	1.26
150	6.52	6.37	6.49	6.65	0.28	28.61	37.22	28.39	0.32	1.07	1.25	1.21	1.22	1.25
250	6.59	6.45	6.57	6.72	0.28	26.62	35.74	25.63	0.50	1.09	1.23	1.20	1.20	1.23
350	6.67	6.52	6.64	6.80	0.28	24.87	34.71	23.70	0.63	1.12	1.21	1.19	1.18	1.21
500	6.80	6.63	6.77	6.94	0.30	22.48	33.40	21.63	0.85	1.17	1.18	1.18	1.16	1.17
700	7.01	6.82	6.96	7.14	0.31	19.93	32.01	19.80	1.16	1.26	1.14	1.15	1.13	1.11
850	7.21	6.99	7.13	7.30	0.32	18.56	31.09	18.94	1.37	1.32	1.10	1.12	1.11	1.06
1000	7.42	7.17	7.32	7.49	0.32	17.74	30.64	18.47	1.65	1.34	1.06	1.09	1.10	1.03
1200	7.74	7.47	7.60	7.76	0.29	17.42	30.68	18.43	2.06	1.28	1.04	1.10	1.12	1.07
1300	7.93	7.65	7.78	7.91	0.28	17.51	30.78	18.54	2.29	1.22	1.06	1.13	1.14	1.10

1. Total Loss = Insertion Loss + 6dB splitter loss.

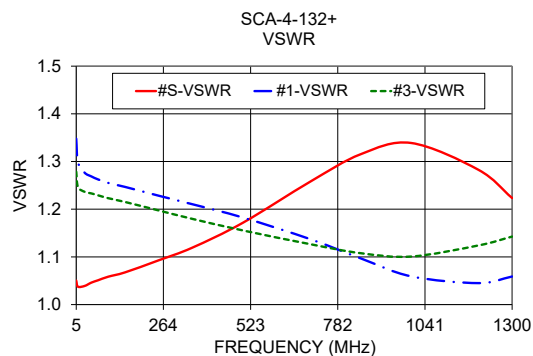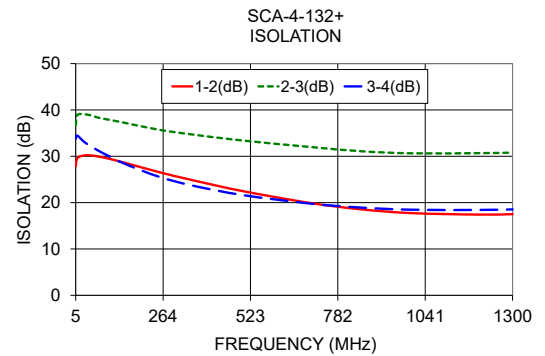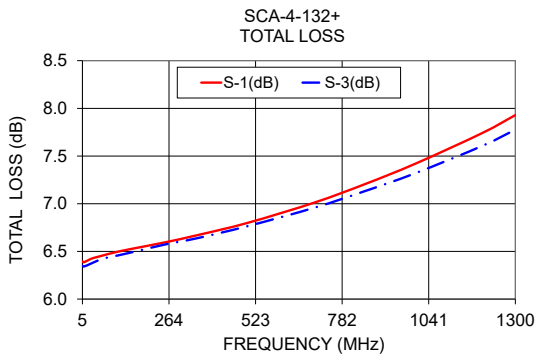

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [Mini-Circuits](#) manufacturer:

Other Similar products are found below :

[MAPDCC0001](#) [MAPDCC0004](#) [PD0409J5050S2HF](#) [880157](#) [HHS-109-PIN](#) [DC1417J5005AHF](#) [AFS14A30-2185.00-T3](#) [AFS14A35-1591.50-T3](#) [DS-323-PIN](#) [B39321R801H210](#) [1A0220-3](#) [JP510S](#) [LFB212G45SG8C341](#) [LFB322G45SN1A504](#) [LFL182G45TC3B746](#) [SF2159E](#) [30057](#)
[FM-104-PIN](#) [CER0813B](#) [MAPDCC0005](#) [3A325](#) [40287](#) [41180](#) [ATB3225-75032NCT](#) [BD0810N50100AHF](#) [BD2425J50200AHF](#)
[C5060J5003AHF](#) [JHS-115-PIN](#) [JP503AS](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [DC3338J5005AHF](#) [43020](#) [LFB2H2G60BB1C106](#)
[LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#) [10013-20](#) [SF2194E](#) [CDBLB455KCAX39-B0](#) [TGL2208-SM, EVAL](#) [RF1353C](#)
[PD0922J5050D2HF](#) [1E1305-3](#) [1G1304-30](#) [B0922J7575AHF](#) [2020-6622-20](#) [TP-102-PIN](#) [TP-103-PIN](#) [BD1222J50200AHF](#)