

Surface Mount Low Pass Filter

SCLF-5+

50Ω DC to 5 MHz

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W max.

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

INPUT	1
OUTPUT	8
GROUND	2,3,4,5,6,7

Outline Drawing

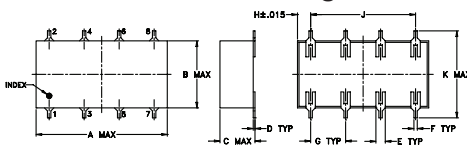


PCB Land Pattern



Outline Dimensions (inch)

A	B	C	D	E	F	G
0.75	0.38	0.28	0.01	0.05	0.02	0.2
19.05	9.65	7.11	0.25	1.27	0.51	5.08
H	J	K	M	N	P	wt
0.075	0.6	0.45	0.47	0.1	0.15	grams
1.91	15.24	11.43	11.94	2.54	3.81	1.60

Demo Board MCL P/N: TB-187+ Suggested PCB Layout (PL-049)

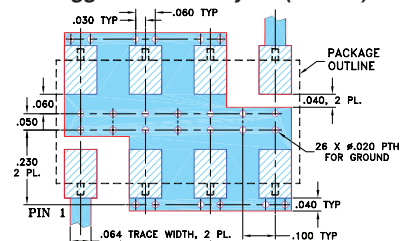

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- wide selection of cut-off frequencies
- excellent rejection
- custom models available

Applications

- defense communications
- receivers/transmitters
- harmonic rejection of VCOs



Generic photo used for illustration purposes only
CASE STYLE: YY161


+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Electrical Specifications

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Pass Band	Insertion Loss	DC-F1	DC-5	—	—	1.0	dB
	Freq. Cut-Off	F2	5.8	—	3.0	—	dB
	VSWR	DC-F1	DC-5	—	1.7	—	:1
Stop Band	Rejection Loss	F3-F4	8-10	20	—	—	dB
		F4-F5	10-200	40	—	—	dB
	VSWR	F3-F5	8-200	—	18	—	:1

Typical Frequency Response


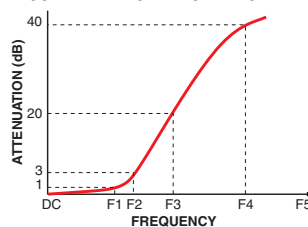


Electrical Schematic



Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
	\bar{x}	σ			
0.30	0.05	0.00	27.93	1.00	150.94
1.00	0.11	0.01	19.79	1.09	149.44
1.70	0.13	0.01	20.83	1.18	149.56
2.40	0.15	0.00	35.97	1.29	151.58
3.10	0.24	0.02	20.96	1.39	153.73
3.70	0.34	0.04	17.62	1.51	153.16
4.40	0.44	0.02	18.29	1.64	154.81
5.00	0.71	0.05	14.82	1.78	157.02
5.80	4.39	0.64	3.50	1.93	157.96
6.50	13.41	0.69	0.92	2.09	159.54
6.80	17.44	0.61	0.69	2.27	161.84
7.10	21.22	0.55	0.59	2.46	163.94
7.40	24.76	0.52	0.53	2.67	166.34
7.70	28.06	0.49	0.49	2.90	169.53
8.00	31.17	0.48	0.46	3.14	172.46
8.30	34.08	0.47	0.44	3.41	177.65
8.60	36.83	0.46	0.42	3.70	184.69
9.00	40.28	0.44	0.40	3.98	193.77
9.30	42.71	0.42	0.39	4.31	209.32
9.70	45.76	0.39	0.38	4.64	230.37
10.00	47.94	0.39	0.38	5.00	267.85
10.30	50.00	0.45	0.37	5.42	321.82
34.00	82.82	4.44	0.27	5.80	316.39
57.70	81.71	2.14	0.28	6.32	210.99
81.40	79.29	0.47	0.28	6.86	128.64
105.20	78.72	1.24	0.28	7.38	87.23
128.90	76.10	1.22	0.28	8.00	60.47
152.60	74.23	1.04	0.27	8.61	45.55
176.30	73.30	0.56	0.27	9.34	33.91
200.00	72.10	0.48	0.27	10.05	26.94

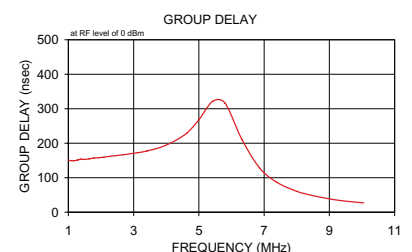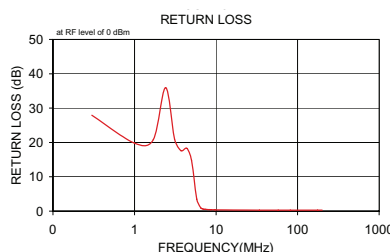

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [Mini-Circuits](#) manufacturer:

Other Similar products are found below :

[MAPDCC0001](#) [MAPDCC0004](#) [PD0409J5050S2HF](#) [880157](#) [HHS-109-PIN](#) [DC1417J5005AHF](#) [AFS14A30-2185.00-T3](#) [AFS14A35-1591.50-T3](#) [DS-323-PIN](#) [B39321R801H210](#) [1A0220-3](#) [JP510S](#) [LFB212G45SG8C341](#) [LFB322G45SN1A504](#) [LFL182G45TC3B746](#) [SF2159E](#) [30057](#)
[FM-104-PIN](#) [CER0813B](#) [MAPDCC0005](#) [3A325](#) [40287](#) [41180](#) [ATB3225-75032NCT](#) [BD0810N50100AHF](#) [BD2425J50200AHF](#)
[C5060J5003AHF](#) [JHS-115-PIN](#) [JP503AS](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [DC3338J5005AHF](#) [43020](#) [LFB2H2G60BB1C106](#)
[LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#) [10013-20](#) [SF2194E](#) [CDBLB455KCAX39-B0](#) [TGL2208-SM, EVAL](#) [RF1353C](#)
[PD0922J5050D2HF](#) [1E1305-3](#) [1G1304-30](#) [B0922J7575AHF](#) [2020-6622-20](#) [TP-102-PIN](#) [TP-103-PIN](#) [BD1222J50200AHF](#)