


# Ultra-Small Ceramic Power Splitter/Combiner

## SCN-3-16+

3 Way-0° 50Ω 950 to 1600 MHz



Generic photo used for illustration purposes only  
CASE STYLE: FV1206-1

### Maximum Ratings



Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	15W* max.

\* Derate linearly to 6W at 100°C ambient.  
Permanent damage may occur if any of these limits are exceeded.


### Pin Connections

SUM PORT	2
PORT 1	6
PORT 2	5
PORT 3	4
GROUND	1,3
PORT 1-2, 2-3	resistor external 124 ohms
PORT 1-3	resistor external 127 ohms

### Outline Drawing



PCB Land Pattern




Suggested Layout, Tolerance to be within ±0.02

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	
.126	.063	.035	.024	.022	.011	
3.20	1.60	0.89	0.61	0.56	0.28	
G	H	J	K			wt
.039	.024	.042	.123			grams
0.99	0.61	1.07	3.12			.020

### Demo Board MCL P/N: TB-303 Suggested PCB Layout (PL-171)



RESISTORS: R1-R2: 124 Ohm, 0603 SIZE; R3: 127 Ohm, 1206 SIZE.

- NOTE:
- TRACE WIDTH IS SHOWN FOR ROGERS RO4350 WITH DIELECTRIC THICKNESS: .020 ±.0015; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
  - RESISTOR LAND PATTERNS ARE SHOWN AS PER IPC-SM-782A.
  - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- Denotes PCB COPPER LAYOUT
- Denotes COPPER LAND PATTERN FREE OF SOLDERMASK

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

### Features

- isolation resistors, external
- low insertion loss, 0.6 dB typ.
- excellent amplitude unbalance, 0.2 dB typ.
- very good phase unbalance, 3 deg. typ.
- high isolation, 15 dB typ.
- excellent power handling, 15W as splitter
- small size, 0.12"x0.06"x0.035"
- ESD non-sensitive
- temperature stable LTCC technology
- wrap around, terminations for excellent solderability
- low cost

### Applications

- DSS
- WLAN
- satellite communication
- line of sight communications
- GSM, GPS
- ISM applications
- defense applications




### Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 4.8 dB		PHASE UNBALANCE (Degrees)		AMPLITUDE UNBALANCE (dB)		RETURN LOSS (dB)	
	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	INPUT Typ.	OUTPUT Typ.
$f_c-f_u$										
950-1600	15	11	0.6	1.2	3.0	5.0	0.2	0.5	14	20
1200-1400	20	14	0.3	0.8	2.0	5.0	0.2	0.4	17	19


### Typical Performance Data

Freq. (MHz)	Total Loss <sup>1</sup> (dB)			Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	Return Loss (dB)		
	S-1	S-2	S-3		1-2	1-3	2-3		S	1	2
950.00	5.42	5.34	5.42	0.08	14.93	13.32	15.30	1.94	11.10	21.04	19.70
1000.00	5.37	5.29	5.37	0.08	15.99	13.99	16.38	2.02	11.91	21.04	20.18
1050.00	5.32	5.24	5.32	0.08	17.23	14.75	17.66	2.12	12.81	20.79	20.41
1100.00	5.28	5.19	5.28	0.09	18.74	15.64	19.23	2.21	13.90	20.24	20.37
1150.00	5.24	5.15	5.24	0.09	20.65	16.70	21.23	2.32	15.20	19.62	19.96
1200.00	5.21	5.12	5.22	0.09	23.15	17.95	23.86	2.42	16.68	19.07	19.59
1250.00	5.19	5.11	5.20	0.10	26.68	19.50	27.55	2.53	18.37	18.56	19.14
1300.00	5.19	5.10	5.20	0.10	31.40	21.43	31.87	2.61	19.89	18.26	18.75
1350.00	5.20	5.11	5.22	0.11	31.35	23.85	30.21	2.66	20.36	18.11	18.57
1400.00	5.23	5.14	5.25	0.11	26.27	26.57	25.45	2.77	19.18	18.14	18.49
1450.00	5.29	5.19	5.31	0.11	22.42	27.77	21.90	2.89	17.07	18.44	18.78
1500.00	5.37	5.28	5.40	0.12	19.61	25.76	19.26	2.91	14.81	19.03	19.18
1550.00	5.48	5.40	5.52	0.12	17.45	22.72	17.20	2.94	12.80	20.12	20.07
1600.00	5.64	5.56	5.68	0.12	15.72	20.10	15.54	2.99	11.01	21.67	21.69

1. Total Loss = Insertion Loss + 4.8dB splitter loss.

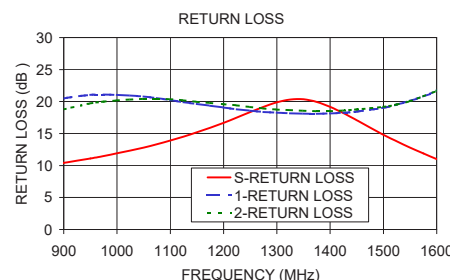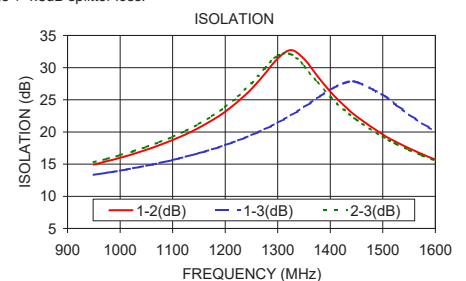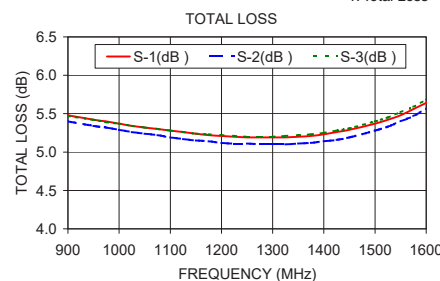

### electrical schematic



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Signal Conditioning](#) category:*

*Click to view products by [Mini-Circuits](#) manufacturer:*

Other Similar products are found below :

[MAPDCC0001](#) [MAPDCC0004](#) [PD0409J5050S2HF](#) [880157](#) [HHS-109-PIN](#) [DC1417J5005AHF](#) [AFS14A30-2185.00-T3](#) [AFS14A35-1591.50-T3](#) [DS-323-PIN](#) [B39321R801H210](#) [1A0220-3](#) [JP510S](#) [LFB212G45SG8C341](#) [LFB322G45SN1A504](#) [LFL182G45TC3B746](#) [SF2159E](#) [30057](#)  
[FM-104-PIN](#) [CER0813B](#) [MAPDCC0005](#) [3A325](#) [40287](#) [41180](#) [ATB3225-75032NCT](#) [BD0810N50100AHF](#) [BD2425J50200AHF](#)  
[C5060J5003AHF](#) [JHS-115-PIN](#) [JP503AS](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [DC3338J5005AHF](#) [43020](#) [LFB2H2G60BB1C106](#)  
[LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#) [10013-20](#) [SF2194E](#) [CDBLB455KCAX39-B0](#) [TGL2208-SM, EVAL](#) [RF1353C](#)  
[PD0922J5050D2HF](#) [1E1305-3](#) [1G1304-30](#) [B0922J7575AHF](#) [2020-6622-20](#) [TP-102-PIN](#) [TP-103-PIN](#) [BD1222J50200AHF](#)