

# Ultra-Small Ceramic Power Splitter/Combiner

# SCN-3-28+ SCN-3-28

3 Way-0° 50Ω 1600 to 2800 MHz



Generic photo used for illustration purposes only  
CASE STYLE: FV1206-1

**+RoHS Compliant**  
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost  
Reel Size Devices/Reel  
7" 20, 50, 100, 200, 500, 1000, 3000

## Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	15W* max.

\* Derate linearly to 6W at 100°C ambient. Permanent damage may occur if any of these limits are exceeded.

## Pin Connections

SUM PORT	2
PORT 1	6
PORT 2	5
PORT 3	4
GROUND	1,3
PORT 1-2, 2-3	resistor external 124 ohms
PORT 1-3	resistor external 127 ohms

## Outline Drawing

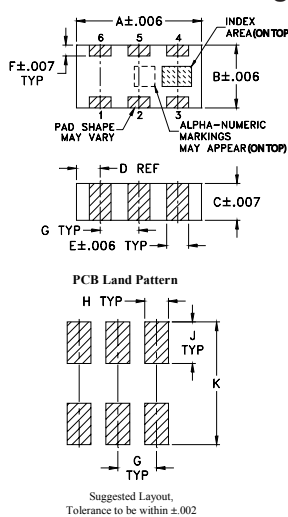


## Outline Dimensions (inch/mm)

A	B	C	D	E	F
.126	.063	.035	.024	.022	.011
3.20	1.60	0.89	0.61	0.56	0.28

G	H	J	K	wt
.039	.024	.042	.123	grams
0.99	0.61	1.07	3.12	.020

## Demo Board MCL P/N: TB-303 Suggested PCB Layout (PL-171)

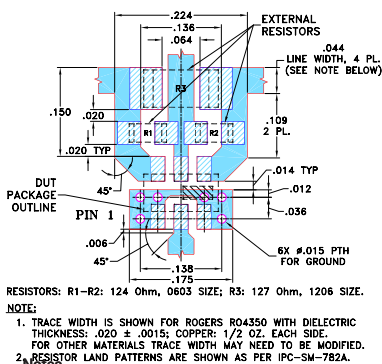

## Features

- isolation resistors, external
- low insertion loss, 0.8 dB typ.
- excellent amplitude unbalance, 0.2 dB typ.
- very good phase unbalance, 5 deg. typ.
- high isolation, 12 dB typ.
- excellent power handling, 15W as splitter
- small size, 0.12"X0.06"X0.035"
- ESD non-sensitive
- temperature stable LTCC technology
- wrap around, terminations for excellent solderability
- low cost

## Applications

- PSC, DECT
- DSS
- WLAN
- satellite communication
- line of sight communication
- ISM applications
- WLL
- defense applications




## Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 4.8		PHASE UNBALANCE (Degrees)		AMPLITUDE UNBALANCE (dB)		RETURN LOSS (dB)	
	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	INPUT Typ.	OUTPUT Typ.
f <sub>l</sub> -f <sub>u</sub>										
1600-2800	12	10	0.8	1.2	5	8	0.2	0.6	10	12
1800-2000	14	12	0.8	1.2	5	8	0.2	0.6	10	13
2000-2200	16	13	0.8	1.2	5	8	0.2	0.5	11	12
2400-2500	20	17	0.8	1.2	5	8	0.2	0.5	11	12


## Typical Performance Data

Freq. (MHz)	Total Loss <sup>1</sup> (dB)			Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	Return Loss (dB)		
	S-1	S-2	S-3		1-2	1-3	2-3		S	1	2
1600.00	5.53	5.81	5.50	0.31	15.27	12.43	16.36	3.29	9.44	18.66	22.27
1700.00	5.50	5.78	5.48	0.29	16.66	13.09	17.87	3.64	9.73	17.30	22.33
1800.00	5.49	5.74	5.47	0.27	18.38	13.86	19.78	3.99	9.99	15.95	20.89
1900.00	5.48	5.71	5.47	0.24	20.57	14.75	22.29	4.31	10.23	14.71	19.12
2000.00	5.48	5.68	5.47	0.21	23.60	15.80	25.98	4.62	10.44	13.73	17.52
2100.00	5.48	5.66	5.48	0.18	28.40	17.05	32.67	4.79	10.63	12.94	16.11
2200.00	5.49	5.63	5.49	0.15	39.20	18.57	45.10	4.99	10.78	12.30	14.93
2300.00	5.49	5.62	5.50	0.12	33.16	20.43	29.60	5.06	10.95	11.85	14.05
2400.00	5.50	5.61	5.51	0.11	25.77	22.80	24.16	5.14	11.12	11.56	13.33
2500.00	5.50	5.60	5.52	0.09	21.75	25.66	20.80	5.14	11.30	11.41	12.83
2600.00	5.51	5.58	5.53	0.08	18.99	28.11	18.37	5.02	11.49	11.33	12.54
2700.00	5.50	5.59	5.54	0.08	16.91	27.40	16.50	4.88	11.65	11.46	12.34
2800.00	5.51	5.60	5.55	0.09	15.25	24.44	14.98	4.68	11.79	11.72	12.35

1. Total Loss = Insertion Loss + 4.8dB splitter loss.

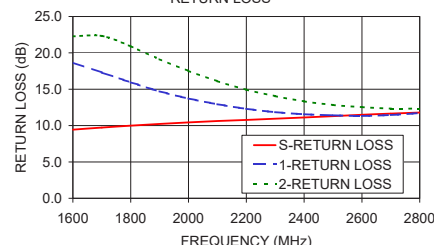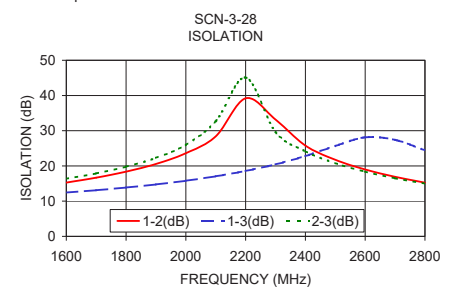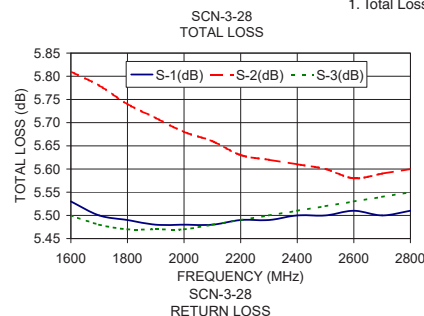

## electrical schematic



A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.  
C. The UNTESTED COMPONENTS AND PARTS ARE SUBJECT TO Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Signal Conditioning](#) category:*

*Click to view products by [Mini-Circuits](#) manufacturer:*

Other Similar products are found below :

[MAPDCC0001](#) [MAPDCC0004](#) [PD0409J5050S2HF](#) [880157](#) [HHS-109-PIN](#) [DC1417J5005AHF](#) [AFS14A30-2185.00-T3](#) [AFS14A35-1591.50-T3](#) [DS-323-PIN](#) [B39321R801H210](#) [1A0220-3](#) [JP510S](#) [LFB212G45SG8C341](#) [LFB322G45SN1A504](#) [LFL182G45TC3B746](#) [SF2159E](#) [30057](#)  
[FM-104-PIN](#) [CER0813B](#) [MAPDCC0005](#) [3A325](#) [40287](#) [41180](#) [ATB3225-75032NCT](#) [BD0810N50100AHF](#) [BD2425J50200AHF](#)  
[C5060J5003AHF](#) [JHS-115-PIN](#) [JP503AS](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [DC3338J5005AHF](#) [43020](#) [LFB2H2G60BB1C106](#)  
[LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#) [10013-20](#) [SF2194E](#) [CDBLB455KCAX39-B0](#) [TGL2208-SM, EVAL](#) [RF1353C](#)  
[PD0922J5050D2HF](#) [1E1305-3](#) [1G1304-30](#) [B0922J7575AHF](#) [2020-6622-20](#) [TP-102-PIN](#) [TP-103-PIN](#) [BD1222J50200AHF](#)