

Surface Mount

Power Splitter/Combiner

SP-2C1+

2 Way-0° 50Ω 640 to 1100 MHz



Generic photo used for illustration purposes only

CASE STYLE: CA531

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost

Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500, 1000

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-65°C to 150°C
Power Input (as a splitter)	1.5W max.
Internal Dissipation	0.75W max.

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

SUM PORT	5
PORT 1	1
PORT 2	3
GROUND	2,4,6

Features

- wide bandwidth
- good isolation, 20 dB typ.
- excellent VSWR, 1.25:1 typ.
- excellent power handling, 1.5W
- small size
- aqueous washable

Applications

- cellular
- GSM
- Land Mobile
- ISM
- PDC

Electrical Specifications


FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 3.0 dB		PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)	VSWR (:1)	
	Typ.	Min.	Typ.	Max.			S-Port Typ.	Output Ports Typ.
640-1100	20	10	0.4	1.0	2	0.2	1.25	1.25

Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
640.00	3.42	3.43	0.01	12.16	0.05	1.39	1.25	1.26
680.00	3.40	3.41	0.01	14.02	0.05	1.34	1.20	1.20
720.00	3.39	3.39	0.01	16.44	0.05	1.29	1.15	1.15
760.00	3.37	3.38	0.01	19.75	0.04	1.24	1.11	1.12
800.00	3.37	3.38	0.01	24.99	0.04	1.20	1.11	1.11
840.00	3.37	3.38	0.01	37.94	0.04	1.17	1.14	1.14
860.00	3.37	3.38	0.01	36.99	0.04	1.16	1.16	1.16
880.00	3.38	3.39	0.01	29.21	0.04	1.17	1.19	1.19
900.00	3.39	3.39	0.01	25.08	0.04	1.17	1.22	1.21
940.00	3.41	3.42	0.01	20.29	0.03	1.21	1.27	1.27
960.00	3.43	3.43	0.01	18.66	0.02	1.24	1.30	1.30
980.00	3.44	3.45	0.01	17.32	0.03	1.27	1.33	1.33
990.00	3.46	3.47	0.01	16.73	0.03	1.29	1.35	1.35
1000.00	3.47	3.48	0.01	16.18	0.03	1.31	1.37	1.36
1100.00	3.64	3.65	0.01	12.18	0.04	1.56	1.52	1.51

1. Total Loss = Insertion Loss + 3dB splitter loss.





Outline Drawing

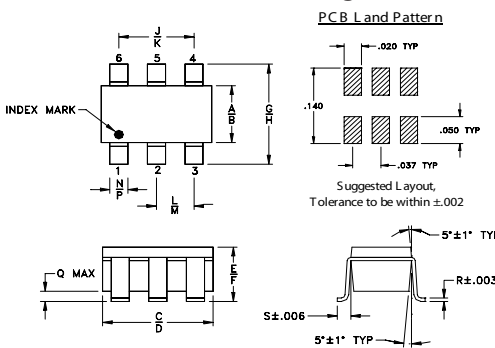

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	wt
.052	.067	.106	.122	.035	.064	.087	.118	.067	.083	.033	.042	.012	.020	.012	.006	.018	grams
1.32	1.70	2.69	3.10	0.89	1.63	2.21	3.00	1.70	2.11	0.84	1.07	0.30	0.51	0.30	0.15	0.46	0.020

Demo Board MCL P/N: TB-374 Suggested PCB Layout (PL-232)

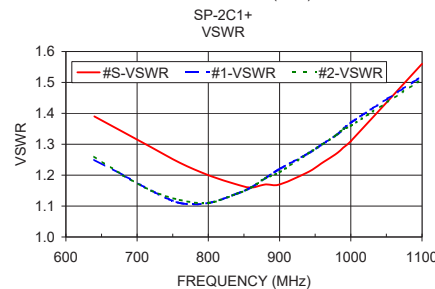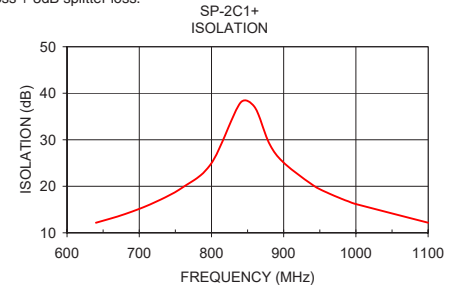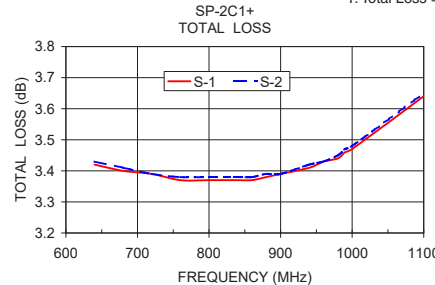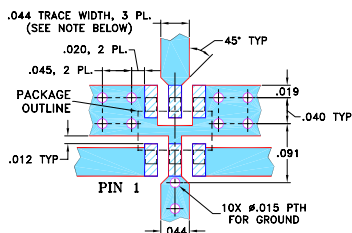

electrical schematic



ESD Rating

Human Body Model (HBM): Class 1A (250 v to <500 v) in accordance with ANSI/ESD STM 5.1 - 2001
Machine Model (MM): Class M1 (< 100 v) in accordance with ANSI/ESD STM 5.2 - 1999 (pass 50V)

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. C
M151107
ED-12348C/1+
SP-2C1+
RS/LC/CP/AM
200428

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [Mini-Circuits](#) manufacturer:

Other Similar products are found below :

[MAPDCC0001](#) [MAPDCC0004](#) [PD0409J5050S2HF](#) [880157](#) [HHS-109-PIN](#) [DC1417J5005AHF](#) [AFS14A30-2185.00-T3](#) [AFS14A35-1591.50-T3](#) [DS-323-PIN](#) [B39321R801H210](#) [1A0220-3](#) [JP510S](#) [LFB212G45SG8C341](#) [LFB322G45SN1A504](#) [LFL182G45TC3B746](#) [SF2159E](#) [30057](#) [FM-104-PIN](#) [CER0813B](#) [MAPDCC0005](#) [3A325](#) [40287](#) [41180](#) [ATB3225-75032NCT](#) [BD0810N50100AHF](#) [BD2425J50200AHF](#) [C5060J5003AHF](#) [JHS-115-PIN](#) [JP503AS](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [DC3338J5005AHF](#) [43020](#) [LFB2H2G60BB1C106](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#) [10013-20](#) [SF2194E](#) [CDBLB455KCAX39-B0](#) [TGL2208-SM, EVAL](#) [RF1353C](#) [PD0922J5050D2HF](#) [1E1305-3](#) [1G1304-30](#) [B0922J7575AHF](#) [2020-6622-20](#) [TP-102-PIN](#) [TP-103-PIN](#) [BD1222J50200AHF](#)