

Coaxial

SMA Fixed Attenuator

50Ω 2W 5dB DC to 6000 MHz

VAT-5W2+



Generic photo used for illustration purposes only

CASE STYLE: DC1066

| | |
|------------|----------|
| Connectors | Model |
| SMA | VAT-5W2+ |

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings

| | |
|-----------------------|----------------|
| Operating Temperature | -45°C to 100°C |
| Storage Temperature | -55°C to 100°C |

Permanent damage may occur if any of these limits are exceeded.


Features

- wideband coverage, DC to 6000 MHz
- 2 watt rating
- rugged unibody construction
- off-the-shelf availability
- very low cost

Applications

- impedance matching
- signal level adjustment

Outline Drawing

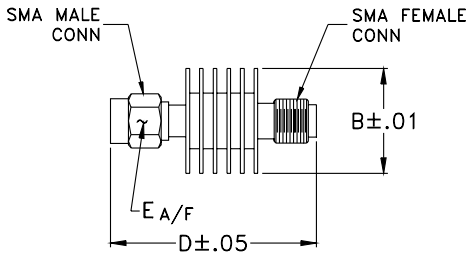

Outline Dimensions (inch/mm)

| | | | |
|-------|-------|------|-------|
| B | D | E | wt |
| .74 | 1.43 | .312 | grams |
| 18.80 | 36.32 | 7.92 | 11.4 |

Electrical Specifications



| FREQ. RANGE (MHz) | ATTENUATION * (dB) | | | | | VSWR (:1) | | | | | MAX. INPUT POWER (W) |
|-------------------|--------------------|------|---------|---------|----------|-----------|------|---------|------|---------|----------------------|
| | Flatness ** | | | | | | | | | | |
| | DC-3 GHz | | 3-5 GHz | 5-6 GHz | DC-6 GHz | DC-3 GHz | | 3-5 GHz | | 5-6 GHz | |
| f_L-f_U | Nom. | Typ. | Typ. | Typ. | Typ. | Typ. | Max. | Typ. | Max. | Typ. | |
| DC-6000 | 5±0.3 | 0.20 | 0.10 | 0.15 | 0.35 | 1.10 | 1.20 | 1.40 | 1.50 | 1.65 | 2.0 |

* Attenuation varies by 0.3 dB max. over temperature.

** Flatness= variation over band divided by 2.

Typical Performance Data

| Frequency (MHz) | Attenuation (dB) | VSWR (:1) |
|-----------------|------------------|-----------|
| 10.00 | 4.99 | 1.00 |
| 100.00 | 5.03 | 1.01 |
| 1000.00 | 5.16 | 1.05 |
| 2000.00 | 5.22 | 1.06 |
| 3000.00 | 5.31 | 1.04 |
| 4000.00 | 5.41 | 1.03 |
| 4500.00 | 5.42 | 1.10 |
| 5000.00 | 5.45 | 1.20 |
| 5500.00 | 5.57 | 1.32 |
| 6000.00 | 5.68 | 1.51 |

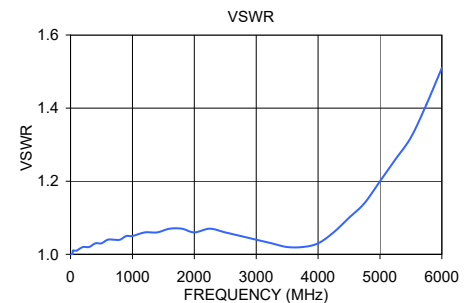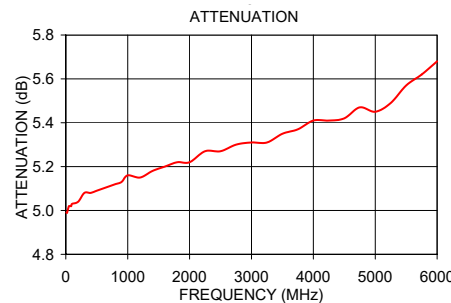

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/VCLStore/terms.jsp



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Attenuators - Interconnects](#) category:

Click to view products by [Mini-Circuits](#) manufacturer:

Other Similar products are found below :

[R411803119](#) [R413806115](#) [R413808000](#) [R413810115](#) [R413850115](#) [R414510000](#) [R414701000](#) [R415303000](#) [BNC-13](#) [R411800121](#)
[R411801121](#) [R412412124](#) [R412450000](#) [R413800000](#) [R413805000](#) [R413830000](#) [R413840115](#) [R414730000](#) [R415420000](#) [R415703000](#)
[R416010000](#) [R420003110](#) [R411801000](#) [R411815121](#) [R413305000](#) [R413801000](#) [R414520000](#) [R411808121](#) [R412500124](#) [R412414124](#)
[R412501124](#) [HMC-C584](#) [R413802000](#) [R412400124](#) [R411700124](#) [R417310130](#) [R411801119](#) [R412419124](#) [R411703124](#) [R412401124](#)
[R443131000](#) [R417130110](#) [R414700000](#) [R414505000](#) [R411802119](#) [R417720128](#) [R420706110](#) [R413811000](#) [R413803115](#) [R414501000](#)